




# GDL-4 LED Gimbal Down Lights



DIMMABLE



The adjustable LED gimbal fixtures are 80% more efficient than incandescent luminaires and they are available in multiple trim finish options to match any style of decor.



## Features

- Energy efficient – up to 80% energy savings
- High Brightness COB LED's
- Low power consumption
- Warm White and Neutral White color temperatures
- Available in two beam angles
- New Construction, IC and remote installations
- cETLus listed for direct contact with insulation and combustible materials
- Easy to install, modular design
- 50,000 hour life
- 3 year limited warranty

## Specifications

Power Consumption	12W
Input Voltage	30V DC*, 320mA constant current
Beam Angle	25/36°
Color Temperature	
Warm White	3000 K
Neutral White	4000 K
Lumens	
Warm White	870
Neutral White	930
Size	1.97" x 5.1" (50 x 129.5mm)
Approvals	cETLus listed for damp locations

## Ordering Code:

GDL - 4 - 12W -  -  -   
 Beam Angle: 25 - 25 degrees, 36 - 36 degrees  
 LED Color: WW - Warm White, NW - Neutral White  
 Finish: WH - White Gloss Enamel, BL - Black, BZ - Bronze, SN - Satin Nickel

NOTE: WH finish is stock, all other options are special order, MOQ required.

Project	<input type="text"/>	Type	<input type="text"/>
Date	<input type="text"/>	Contact	<input type="text"/>
Notes	<input type="text"/>		




www.magiclite.com


905-825-9592  
888-945-5483

905-825-8334

lights@magiclite.com



### Construction Plate

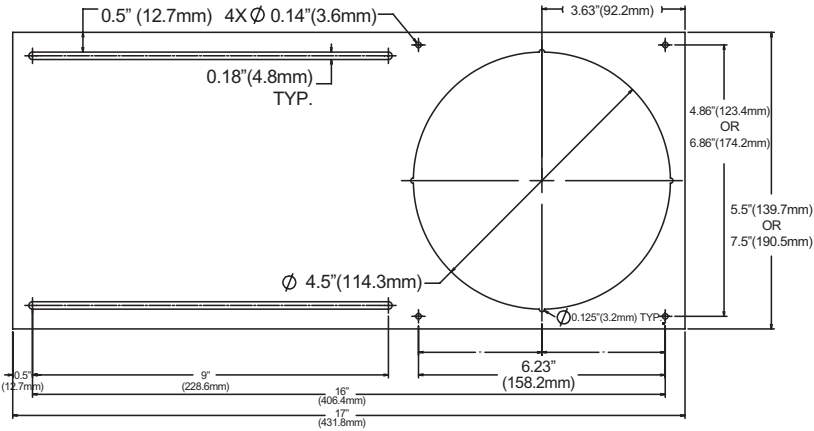

### Compatible dimmers

Dimmable to 5% with most standard dimmers

Lutron	C.L™ Dimmers
	DVELV-300
	SELV-3600P
	NTELV-300/600
	MAELV-300/600
Leviton	MRF2-6ND-120
	VPE04
	6615
	VPE06
	VRE06
	6672
	6674
IPE04	

