


8", 14 watts Square LED Surface Mount Down Light is a low-profile down light intended for ceiling mount applications.

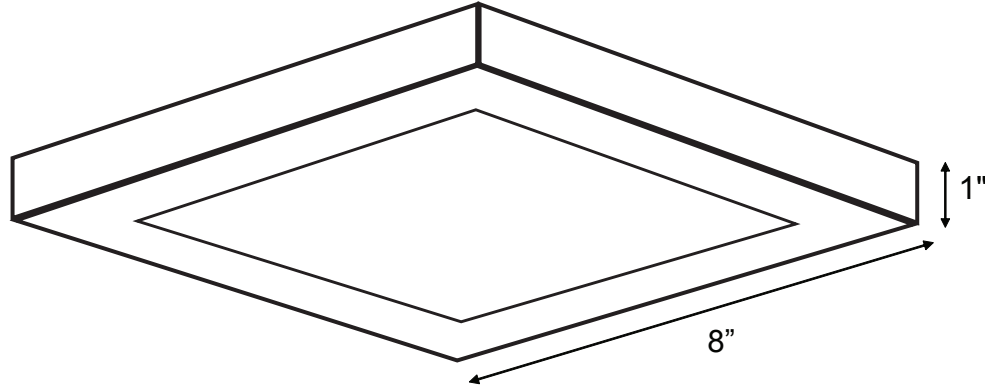

Includes

- (1) Surface mount fixture
- (1) Mounting plate
- (3) Wire Nuts
- (1) Fitting instruction
- (2) Wood screws

**Specifications and dimensions subject to change without notice.*

Features

- Driver on Board Technology, provides a 120V alternating current source and eliminates the need for traditional LED driver
- Quick & easy to install on standard junction box, ceiling mount with mounting plate
- Die-cast aluminum housing
- Smooth and continuous dimming, dimmable with most standard dimmers
- Rated for 50,000 hours
- No light bulbs to replace or dispose
- Instant full brightness (including in sub-zero temperatures)
- 80+ CRI
- cETLus listed for wet locations
- 5 year limited warranty are powder coat painted and available in the following finishes: White Gloss Enamel (WH), Bronze (BZ), Brushed Nickel (BN) and Black (BK)

Specifications

Electrical	Input: AC 100 – 120V 14W
Power Factor	0.95
LEDs	Epistar
LED Life	50,000 hours
Lumen Output WW = Warm White NW = Neutral White	1000 WW, 1050 NW
Lumen Efficacy (LPW) WW = Warm White NW = Neutral White	71 WW, 75 NW
Colour Temperature	Warm White 3000K Neutral White 4000K
CRI	≥80
Appearance Size (L x W x H)	8" x 8" x 1" (203mm x 203mm x 25mm)
Approvals	cETLus listed for wet locations, Energy Star rated

Ordering Code:

LVLDL - SS - 08 - - - L

LED Colour Trim Finish

WW = Warm White (3000K) WH = White

NW = Neutral White (4000K) BK = Black

 BZ = Bronze

 BN = Brushed Nickel

Project		Type	
Date		Contact	
Notes			