



Gen 2 LED Hard Strip

DIMMABLE



Gen 2 LED Hard Strip is a new and improved energy efficient linkable strip, that provides a smooth, even lighting, eliminating any hot spots.

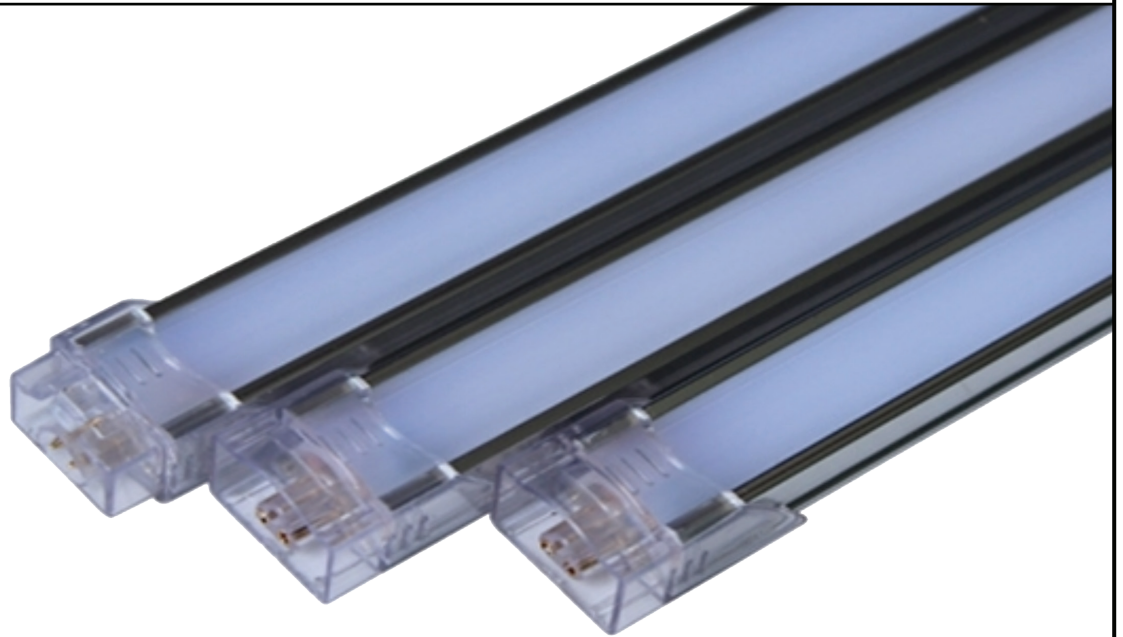

Features

- 50,000 hours life
- Use high brightness 0.5W Epistar LEDs as lighting source
- Even light distribution with 120° viewing angle
- 24V DC
- 4 sizes – 11.8” (30cm), 19.7” (50cm), 39.4” (100cm), 47.3” (120cm)
- Convenient connector between two strips
- Diffused frosted lens to reduce glare
- Temperature rating: -35C - 50C
- 3 year limited warranty

NOTE: Each Hard Strip bar ships with 2pcs of 0° mounting clips and one end cap.



Specifications

Input Voltage (V DC)	24
Power per strip	11.8” (30cm) = 4W 19.7” (50cm) = 7W 39.4” (100cm) = 13W 47.3” (120cm) = 16W
LED Qty. per strip	11.8” (30cm) = 36 19.7” (50cm) = 60 39.4” (100cm) = 132 47.3” (120cm) = 156
Lumen (lm) NW = Neutral White WW = Warm White	11.8” (30cm) = 380 WW, 400 NW 19.7” (50cm) = 621 WW, 664 NW 39.4” (100cm) = 1036 WW, 1066 NW 47.3” (120cm) = 1100 WW, 1150 NW
Colour Temperature WW = Warm White NW = Neutral White	3000K +/- 200K 4200K +/- 200K
Viewing Angle	120°
Lens	Frosted

Ordering Code:

LV - HS - PD20 - 24V - -
 30 - 30cm (11.8”) WW - Warm White
 50 - 50cm (19.7”) NW - Neutral White
 100 - 100cm (39.4”)
 120 - 120cm (47.3”)

Project		Type	
Date		Contact	
Notes			

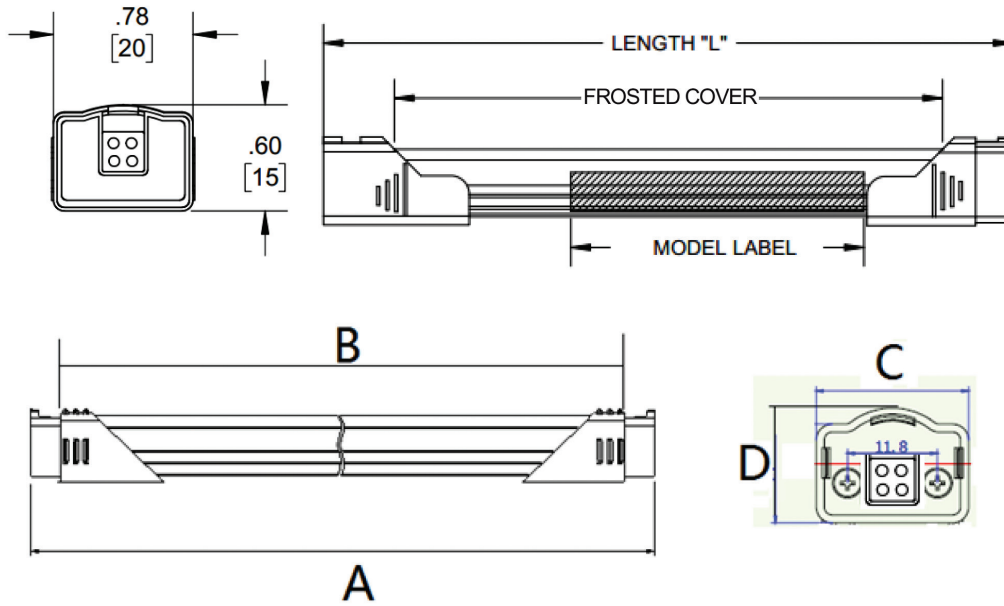

Model No	Input Voltage (VDC)	Lamp Power (Watt)	A (mm)	B (mm)	C (mm)	D (mm)	Max Continuous Length (meter)
LV-HS-PD20-24V-30	24V	4 W	300	286	20	15	6
LV-HS-PD20-24V-50	24V	7 W	500	486	20	15	6
LV-HS-PD20-24V-100	24V	13 W	1000	986	20	15	6
LV-HS-PD20-24V-120	24V	16 W	1200	1186	20	15	6