


LED Outdoor Sconce combines the elegant design with high efficiency LEDs, making it ideal for use in up light and down light applications, for both indoor and outdoor.

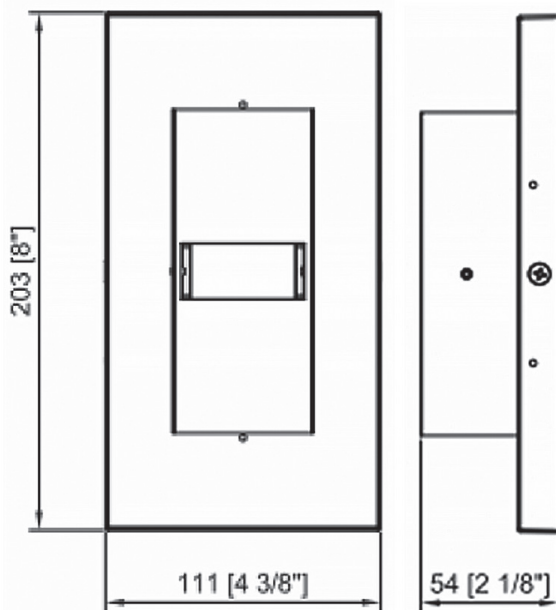

Features

- Housing – Rugged aluminum construction
- 120V - 277V AC input voltage
- Lumen output 1300LM
- CRI 80+
- Ambient temperature: -20C - 40C
- LED life: 50,000 hours
- Powder coated finish
- 120° beam angle
- cULus listed for wet locations
- 5 year limited warranty

Specifications

Electrical	120V - 277V AC input voltage
CRI	80+
LED Lifetime	> 50,000 hrs.
CCT	3000K/4000K
Lumen (lm)	1300
Beam Angle	120°
Product Finish	Powder coated finish
Approved Location	cULus listed for wet locations
Appearance Size	8" x 4 3/8" x 2 1/8" (203 x 111 x 54mm)

Ordering Code:

FIXTURE:

TLWMV15 WM

LED Colour Temperature: 3(3000K), 4(4000K)
 Finish: BR (Brown), BK (Black), SV (Silver)

COVERS:

Finish: -01, -02, -04

TLWMV15XWM -01
 TLWMV15XWM -02
 TLWMV15XWM -04


BR (Brown), BK (Black), SV (Silver)

Project		Type	
Date		Contact	
Notes			


LED Outdoor Sconce combines the elegant design with high efficiency LEDs, making it ideal for use in up light and down light applications, for both indoor and outdoor.

Three Cover Options available


(Sold Separately)

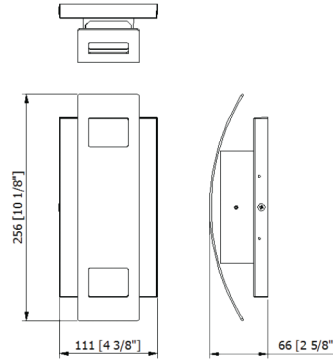

WAVE TLWMV15XWMZZ-01

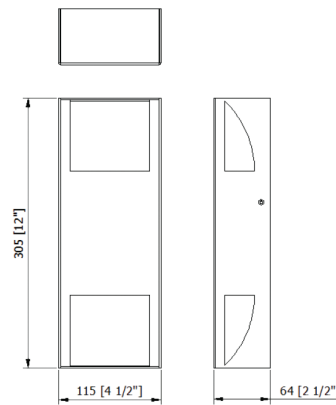

WING TLWMV15XWMZZ-02

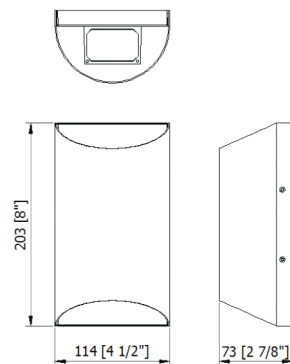

SCOOP TLWMV15XWMZZ-04