DOWN LIGHTING | SURFACE MOUNT / DECORATIVE

cETLus listed

• Easy installation

5 year warranty

Maintenance free

• Even light distribution

Ceiling Lights

• Elegant and energy efficient design

• Available in brushed nickel trim

• Dimmable with most ELV dimmers

• Suitable for damp location

• Input voltage: 120VAC

• 50,000 hours life

FEATURES

Ceiling lights are versatile, designed to fit any interior, whether at home or in a business. They serve as direct replacements for traditional ceiling fixtures, offering both aesthetic appeal and energy efficiency.

() 120V Intertek

APPLICATIONS

RESIDENTIAL

- Kitchens
- Pantries
- Laundry rooms
- Bathrooms
- Stairways Retail & restaurants

COMMERCIAL Lobbies

Hallways


Elevators

SPECIFICATIONS				
Product Code	CLD-1625-XXK-BN			
Electrical	Input Voltage	120V AC		
	Power Consumption	25W		
Specs	Colour Temperature	3000К		
	CRI	80		
	Lumen Output	1875LM		
	Dimmable	Yes (with most ELV dimmers)		
	Beam Angle	120°		
LED	Life Span	50,000 Hours		
Design	Dimensions (Inches)	18.87 x 3.65"		
	Dimensions (Millimeters)	403 x 93mm		
	Finish Colour / Trims	Brushed Nickel		
	Product Material	Metal/Acrylic		
	Approved Location	Indoor		
	Mounting	Ceiling		

NOTE: MOQ may apply.


DIAGRAM

PRODUCT CODES

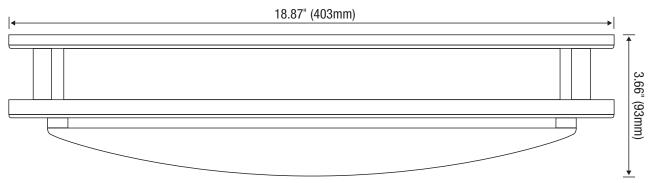

Flastriad	Input Voltage	120V AC
Electrical	Power Consumption	25W
	Colour Temperature	3000К
	CRI	80
Specs	Lumen Output	1875LM
	Dimmable	Yes (with most ELV dimmers)
	Beam Angle	120°
LED	Life Span	50,000 Hours
	Dimensions (Inches)	18.87 x 3.65"
	Dimensions (Millimeters)	403 x 93mm
Design	Finish Colour / Trims	Brushed Nickel
Design	Product Material	Metal/Acrylic
	Approved Location	Indoor
	Mounting	Ceiling
Warranty	5 years	
Approvals	cETLus and Energy Star	





Light

2