


EXCL Series 1.5" x 2" / 1.8 watt LEDs

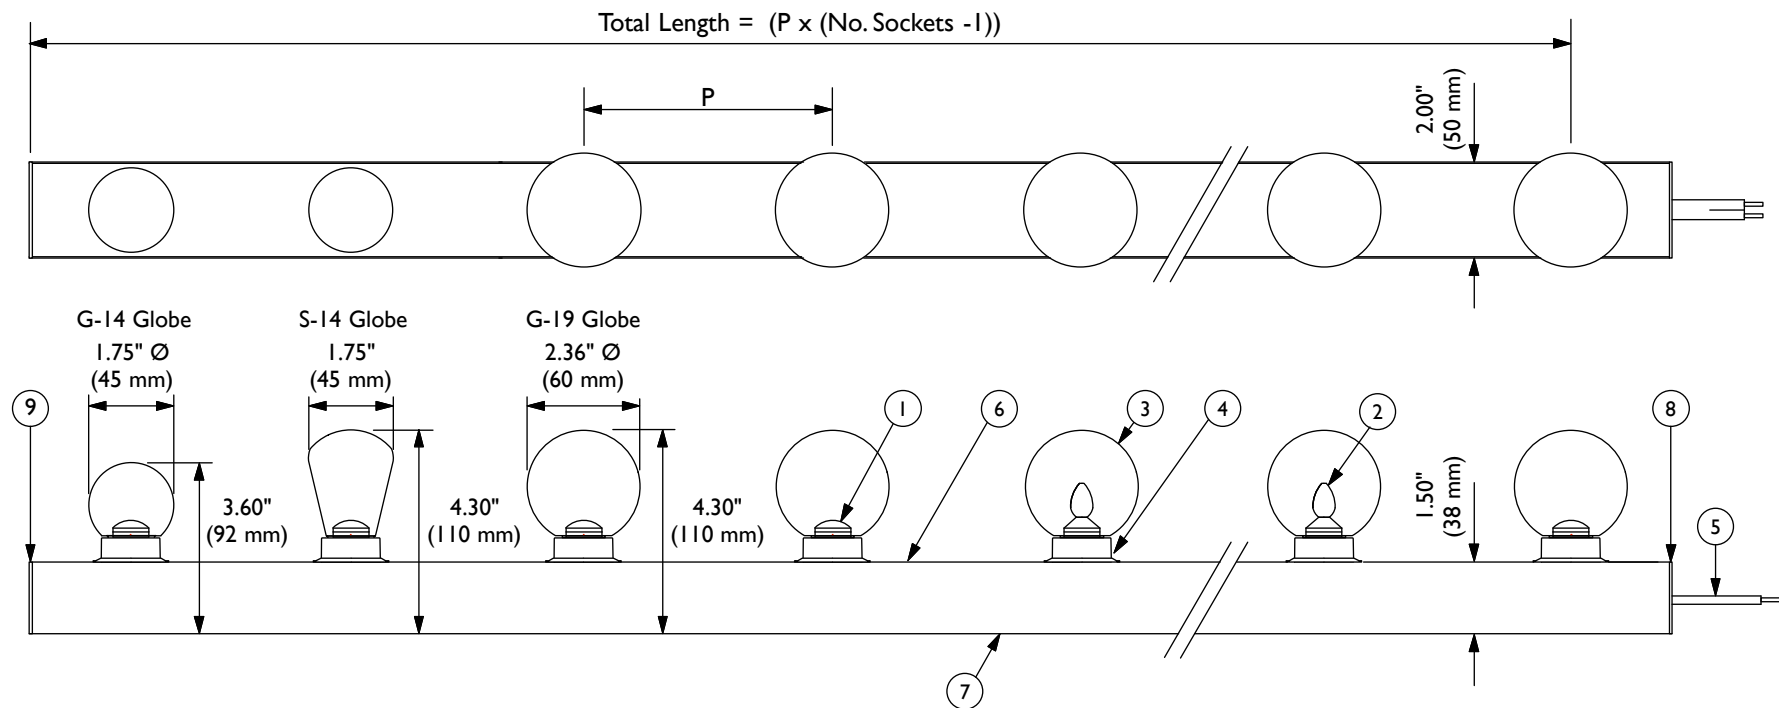

Catalog#	P(Inch)	Extrusion Length	Max. Fixture Length
EXCL-6-(LED Code)-(G-14, S-14, G-19)-(C,F)	6" $\pm$.075	10 FT. (3 M)	125 FT. (38 M)
EXCL-12-(LED Code)-(G-14, S-14, G-19)-(C,F)	12" $\pm$.075	10 FT. (3 M)	200 FT. (60 M)
EXCL-18-(LED Code)-(G-14, S-14, G-19)-(C,F)	18" $\pm$.075	10 FT. (3 M)	225 FT. (68 M)

- C = Clear Globe, F = Frosted Globe
- Standard Extrusion Finish is Satin Aluminum
- Custom Finishes Available upon request

1.8 Watt LED 24VAC/75.0mA			
Part#	LED Code	Color	Lumen
EX-UB-LW	UBLW	2000K	41 Lm
EX-UB-WW	UBWW	2400K	45 Lm
EX-UB-IW	UBIW	3000K	50 Lm
EX-VI-LW	VILW	2000K	36 Lm
EX-VI-WW	VIWW	2400K	40 Lm
EX-VI-IW	VILW	3000K	44 Lm

Virtual Incandescent LED (EX-VI) Not Recommended for use with Frosted Globes



TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

EXC Series Submittal	No.	Part	Material
Catalog#: EXCL- _-(LED Code)-(G-14, S-14, G-19)-(C,F)	1	EX-UB-LW, EX-UB-WW, EX-UB-IW	Solid-State Ultra-Bright LED
Date: February 1, 2020	2	EX-VI-LW, EX-VI-WW, EX-VI-LW	Solid-State Virtual Incandescent LED
Drawn By: R. Cordova	3	Globe	Polycarbonate
Scale: 1:4	4	Socket	PBT
Weight: 400g/0.88 lb per Ft. @ 6" O.C.	5	#12 AWG Wire	PVC with Plated Copper Conductor X 2
	6	Extrusion Cover	Aluminum
	7	Extrusion Base	Aluminum
	8	End Cap (Live End)	Aluminum
	9	End Cap (Dead End)	Aluminum