



# TOKISTAR LIGHTING INSTRUCTION MANUAL

## LDR24-192

## 24 VDC/192 WATT LED DRIVER

### General

Tokistar's LDR24-192 is a 192 Watt Class 2 LED Driver used to convert an AC input into an 24 VDC output. It may be operated from a wide range of input voltages, and is provided within an enclosure suitable for wet locations.

### Wiring Procedures

To access both the AC and DC wiring compartments, remove the top cover by removing the 4 screws using a Philips screwdriver. Ensure the white plastic washers on each screw are not lost during removal.

### Input Connections

Install and secure the AC conduit pipe to the LED Driver's knockout by using the proper conduit fitting hardware. The AC input wires should be protruding from the conduit pipe and into the LED Driver's AC wiring compartment.


**(Note: For installation in outdoor or wet locations, liquid tight fittings and conduit must be used for proper NEMA 3/IP65 protection.)**

Connect the AC input wires to the LED Driver using the proper UL approved wire nuts. The **Black wire** from the unit should connect to the incoming AC Live wire. The **White wire** from the unit should connect to the incoming AC Neutral wire. The **Yellow/Green wire** from the unit should connect to the incoming AC Ground wire.

**(Note: The complete metal case is referenced to AC ground upon proper installation of AC input wires.)**

### WARNING!

Do Not Connect Input Wires to Dimmer.  
This Will Damage the Driver.

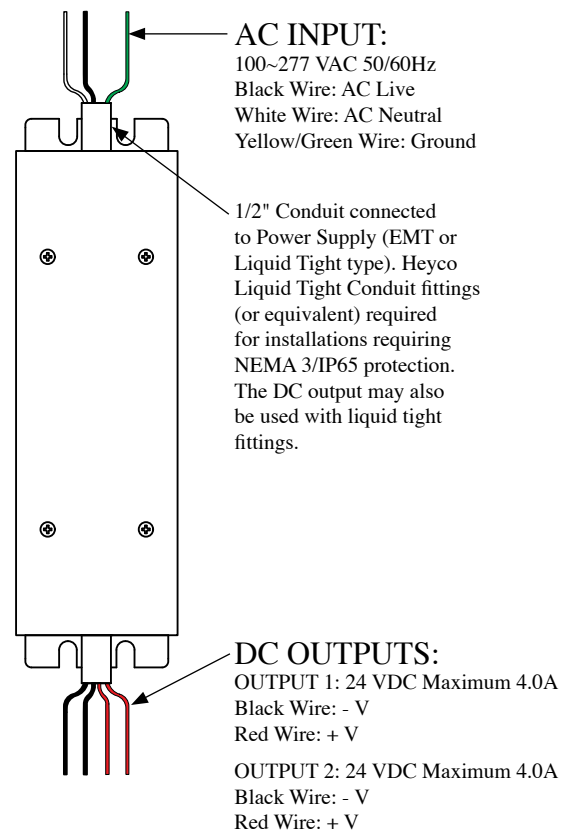

### ⚠ PRECAUTIONS

1. Read all instructions completely before beginning installation.
2. Turn off electricity before beginning installation.
3. All wiring is to be performed by a qualified electrician.
4. Installation must comply with the National Electrical Code, and all applicable codes.
5. Turn main supply to LED Driver on only after all connections are made and tested.
6. Use only LED Drivers provided by Tokistar with the system.

### TOKISTAR® LIGHTING

1015 E. Discovery Lane  
Anaheim, CA 92801

TEL: 714 772 7005 FAX: 714 772 7014

email: info@tokistar.com Website: tokistar.com


## Output Connections

Connect the LED Driver's DC wires to the LED lighting fixture. The wire connections are made within the LED Driver's DC wiring compartment, using wire nuts or other appropriate electrical connection. One **Black wire** from the unit is the DC negative side of one of the two 96 Watt outputs, and one **Red wire** from the unit is the DC positive side of one of the two 96 Watt outputs. The other **Black wire** is the DC negative side of the second of the two 96 Watt outputs. The other **Red wire** from the unit is the DC positive side of the second of the two 96 Watt outputs. The LED lighting fixture DC input wires can be secured to the LED Driver by attaching conduit pipe with conduit fittings, or cord fittings to the LED Driver's 1/2" knockouts. **(Note: The output wires for each channel should not be interconnected.)**

## Check For Proper Operation

Once all wiring is completed, turn on the AC supply to check for proper LED lighting system operation. Once proper operation is confirmed, turn off the AC supply and then re-install the top cover of the LED Driver using the 4 screws and Philips screwdriver. Ensure the plastic washers are installed on each screw before re-installation. It is also important to ensure all wiring is maintained within each wiring compartment to prevent wires from being pinched between the cover's gasket and the unit's case.

**(Note: In outdoor installations, or any installation in wet locations, tighten the screws using a torque controlled screwdriver with a torque setting of 4.0 to 6.0 inch pounds.)**

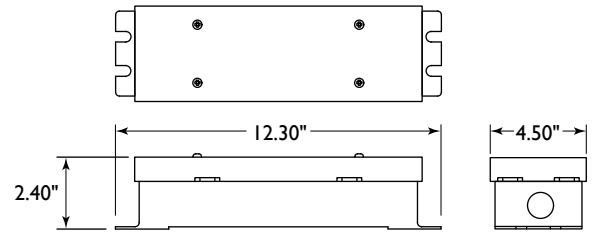

## Specifications

Input Range: 100~277 VAC

Frequency Range: 50/60 Hz

Output: 24 VDC (Adjustable +5% / -30%)

Max. Output Current: 8.0A (2 @ 4.0A)

Max. Output Power: 192W (2 @ 96W)

Protection: Overload, Overcurrent, Short Circuit

Operating Temperature: -25°C to +60°C

## Mechanical Specifications

Dimensions: 4.5" x 12.3" x 2.4"

Weight: 2.55Kg / 6 lbs

Enclosure Rating: Nema 3/IP65

Mounting: Flange Mount

Connection: Knockouts for 1/2" Conduit

## Safety Standards

UL 1012/1585, UL8750, UL Class 2 Wet locations,

UL 48,cUL, CE, UL #: E342485

## Capacity

### TokiLux Light Bars

4.0 Watt Light Bars: 48 each (24 per output)

2.4 Watt Color Bars: 80 each (40 per output)

### Advantage AVXF Series

0.72 watt LEDs: 266 each (133 per output)

### Micro Tracklight

1.6 Watt LED Modules: 120 each (60 per output)

### Gradient GRX Series

3.0 Watt LEDs: 64 each (32 per output)

## TOKISTAR® LIGHTING

1015 E. Discovery Lane

Anaheim, CA 92801

TEL: 714 772 7005 FAX: 714 772 7014

email: info@tokistar.com Website: tokistar.com