LED Disc Light Dome STAINLESS STEEL CONSTRUCTION

A robust LED marker light ideal for public or residential applications, indoor or outdoor.

FEATURES

- Dimmable with dimmable power supplies
- Long life 50,000 hours
- Low power consumption 3 watts per fixture
- Safe 12 volt, Class 2 power supply (not included)
- Up to 30 fixtures per power supply
- cETLus listed for in-wall, in-floor, outdoor wet, and outdoor burial applications
- Fits in any 1.5" diameter hole, 4" long
- Stainless steel construction (SUS 316)
- Available concrete form for concrete pour applications
- 3 year limited warranty

APPLICATIONS

- Steps
- Aisles
- Paths
- Driveways
- Direction lighting
- Decorative lighting
- Landscape accents

PRODUCT CODES

LEDD - C - XX - D

LED Disc Light Dome





SPECIFICATIONS

ned" est tions. 15.

REPLACEMENT LED MODULES

LEDD-MOD-WH

LED Disc Light module, 12V, white LED 5500K

LEDD-MOD-WH

LED Disc Light module, 12V, warm white LED 2700K

INSTALLATION WIRE


LW-18G-BUR

For outdoor burial connections

LW-18G-CL2

For indoor through wall connections

NOTE: One of the above wires MUST be used in order to maintain product warranty.

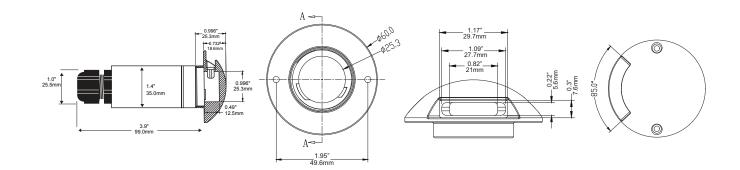

ACCESSORIES



LEDD-CF Recommended for easy installation in concrete pour applications.

INDOOR/OUTDOOR DIMMABLE DRIVERS

MLDRE-20-12-DM

20 Watts Max. recommended load 18 W or 6 LED Disc Lights Min. recommended load 8 W or 3 LED Disc Lights 6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

MLDRE-60-12-DM

60 Watts Max. recommended load 54 W or 18 LED Disc Lights Min. recommended load 8 W or 3 LED Disc Lights 6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief.

NON DIMMABLE DRIVERS

LEDDR-12-20W-HW

Indoor driver 20W hardwire Input: 100 – 240V AC Output: 12V DC Max. 6 LED Disc Lights 4 1/8" x 4 1/8" x 1 1/2" (104.8 x 104.8 x 38.1mm)

LEDDR-12-60W


Indoor/Outdoor driver 60W hardwire Input: 100 - 240V AC Output: 12V DC Max. 18 LED Disc Lights 9 11/16" x 2 9/16" x 2 1/16" (246 x 65 x 52mm)

WARNING: LACK OF DRAINAGE WILL VOID THE WARRANTY

To maintain the warranty, a proper drainage system MUST be installed (drainage material or drainage pipe), when the product is installed in soil or concrete.



A quantity of water equal to the volume of the mounting hole should drain in 15 minutes or less.







Concrete

Paving

stones

Soil

installation

0

MA AM

installation