


LED Type High Brightness 5050 SMD LEDs
 # of LEDs per foot 9
 Viewing Angle 120°
 LED Life 50,000 hours
 Colour RGB
 Custom Cuttable 6.5"
 Operating Voltage 24V DC
 Maximum Single Run 40FT
 Power Consumption 2.2W / ft
 LED Spacing 32mm
 Approvals cETLus
 Adhesive 3M double side adhesive tape

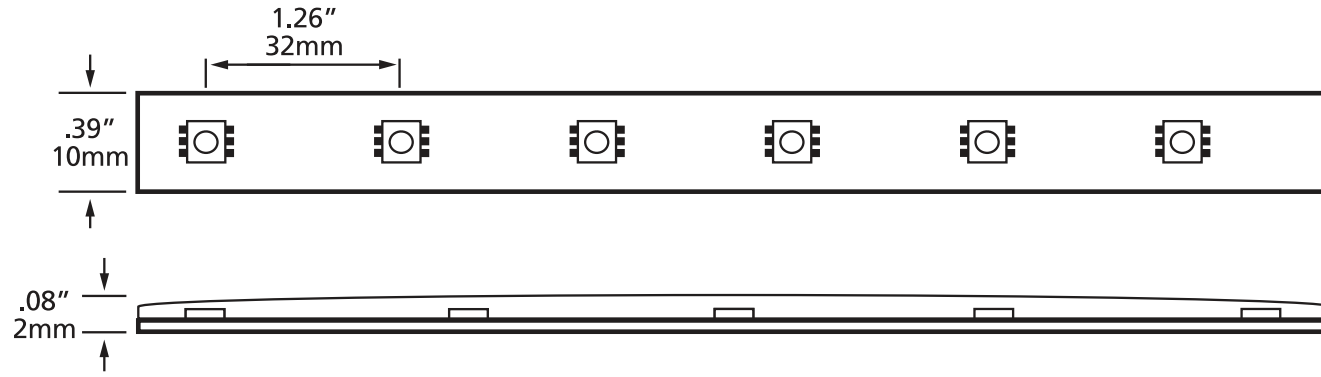

Revisions:

4		
3		
2		
1		

* Use only MLDR-120-24 or MLDR-20-24JB power supplies when controlling RGB LED Strip.
 Do not use dimmable power supplies for colour change applications.



Project:

Part number: LP-5060-30-24OD-RGB

Scale: NTS

Product: LOW POWER TAPE LIGHT 2.2W/FT OUTDOOR USE RGB

Type:

Date: