


CCT Adjust Mini Flood Light

MAGIC LITE
YOUR TRUSTED LIGHTING PARTNER

Compact, Powerful and Economical

CCT Adjust Mini Flood Lights provide exceptional illumination for architectural, signage and landscape applications. CCT adjustable with a push of a button 3000K/4000K/5000K.

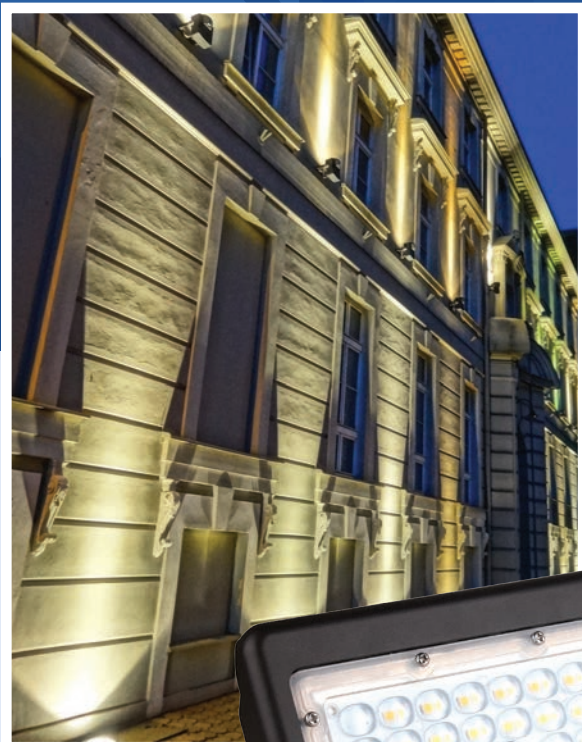

Features

- ✓ Compact size
- ✓ CCT adjustable 3000K/4000K/5000K
- ✓ High lumen output
- ✓ Easy to install and operate
- ✓ Beam angle 150° x 120° (7H6V)
- ✓ Long life 50,000 hours
- ✓ Instant start, no flickering
- ✓ Available in 15W, 30W or 50W
- ✓ cULus listed for wet locations
- ✓ 5 year limited warranty

Applications

- Architectural lighting
- Signage
- Landscape lighting
- Exterior commercial




1150 Northside Road, Unit 14, Burlington, ON, Canada L7M 1W8
Tel: 905-825-9592 • Fax: 905-825-8334 • lights@magiclite.com


magiclite.com

CCT Adjust Mini Flood Light


15W and 30W

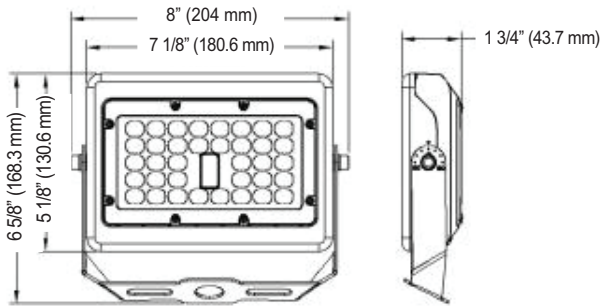


50W

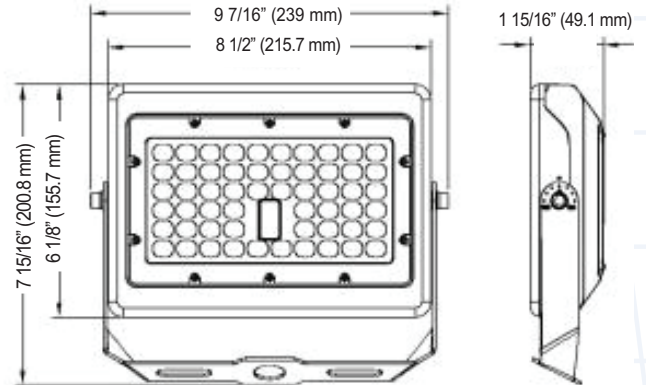


Mounting Accessories

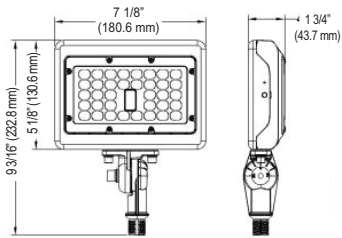


Knuckle mount bracket
(pre-installed)
(To use for junction box mount,
supplied by others)

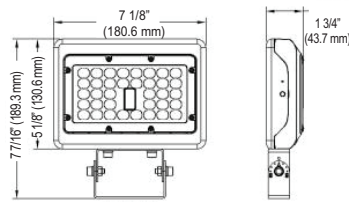

Trunnion mount bracket
(FL-TR)
(To use for wall and ground
mount)

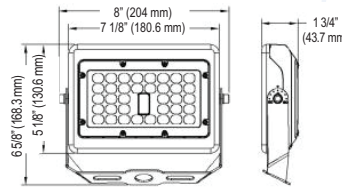

Yoke mount bracket
(FL-Y-15/30, FL-Y-50)
(To use for wall and ground
mount)

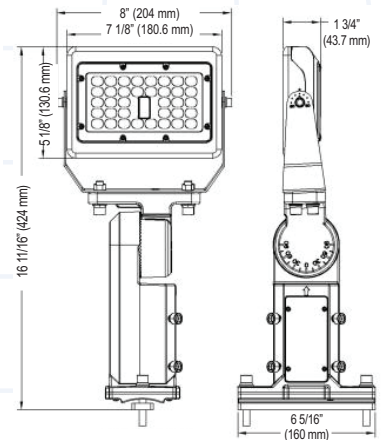


Universal mount bracket
(FL-ADM-15/30, FL-ADM-50)
(For use on poles)

Specifications

	CCT Adjust Mini Flood Light
Product Code	FL-15-CT FL-30-CT FL-50-CT
Colour Temperature	Warm White (3000K) Neutral White (4000K) Cool White (5000K)
Input Voltage	100 -277VAC
Power Consumption (W)	15W / 30W / 50W
Lumen Output	15W: 3000K=1725-1950LM / 4000K=2025-2250LM / 5000K=1875-2100LM 30W: 3000K=3450-3900LM / 4000K=4050-4500LM / 5000K=3750-4200LM 50W: 3000K=5750-6500LM / 4000K=6750-7500LM / 5000K=6250-7000LM
LED Type	SMD3030 (1W)
Beam Angle	150° x 120° (7H6V)
Operating Temperature	-20°C to 50°C
Colour Rendering Index	>80
Approvals	cULus listed for wet locations

Glare shield
FL-SH-15/30
FL-SH-50

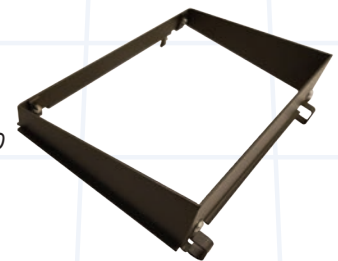

Wire guard
FL-WG-15/30
FL-WG-50

