

# T-LED Edge Light CCT

NOW WITH CCT AND WATTAGE ADJUST FEATURES

**MAGIC LITE**  
YOUR TRUSTED LIGHTING PARTNER

## Welcome to the leading edge in ceiling lighting.

T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers at a fraction of the cost. Our CCT and wattage adjust features make T-LED all the more versatile.



### Features

- ✓ Ideal replacement for traditional flat panels and troffers at a fraction of the cost
- ✓ Non-flicker, no dark spots
- ✓ Installs in minutes
- ✓ AC100-277V, 0-10V dimmable
- ✓ cETLus, DLC premium
- ✓ Ambient temperature: -20°C - 45°C
- ✓ Available in 2X2 and 2X4 versions
- ✓ Adjustable wattage:       2X2: 20W/30W/40W  
  2X4: 40W/50W/60W
- ✓ Adjustable colour temperature: 3500K/4000K/5000K
- ✓ Dry locations
- ✓ 5 year limited warranty

### Applications

- Retail
- Offices
- Hallways
- Elevators
- Banquet Halls
- Restaurants

1150 Northside Road, Unit 14, Burlington, ON, Canada L7M 1W8  
Tel: 905-825-9592 • Fax: 905-825-8334 • [lights@magiclite.com](mailto:lights@magiclite.com)



DESIGNLIGHTS  
CONSORTIUM


[magiclite.com](http://magiclite.com)

# T-LED Edge Light

AC100-277V, 0-10V dimmable technology that offers an ideal replacement for traditional flat panels and troffers.


## Easy installation:

1. Remove existing ceiling tile.
2. Place T-LED Edge Light in T Bar ceiling frame and connect to power.
3. Replace ceiling tile.

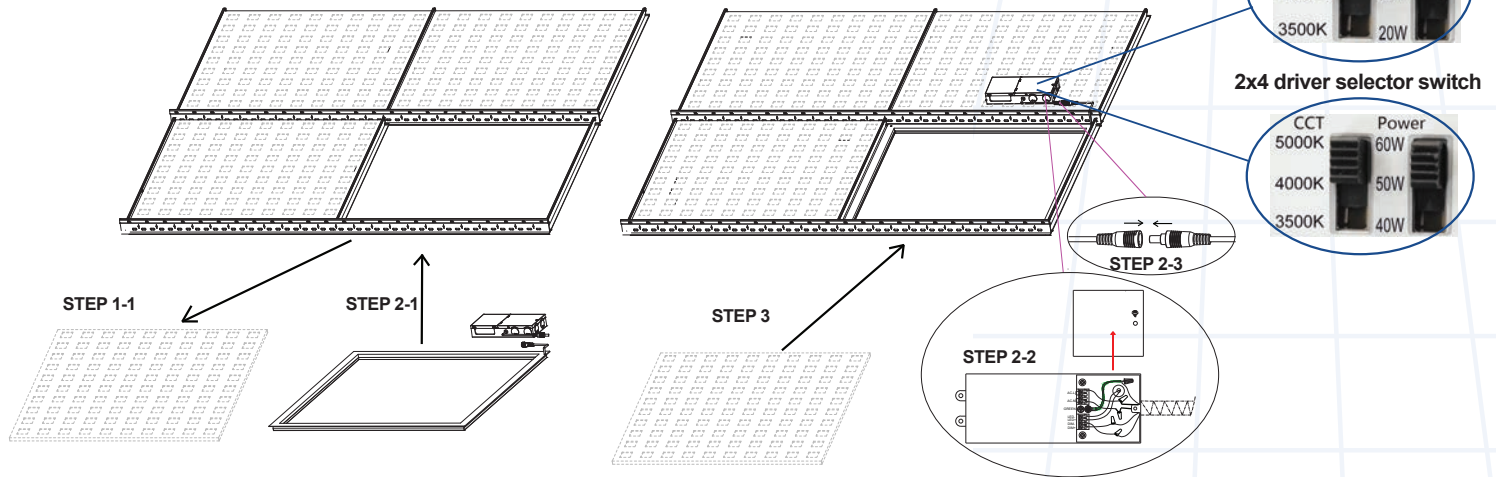

## Specifications

|                        | T-LED Edge Light   |
|------------------------|--|
| Product Code           | TLE-2X2-K40-3050<br>TLE-2X4-K60-3050                           |
| Colour Temperature     | 3500/4000/5000K adjustable                                     |
| Input Voltage          | AC100-277V   |
| Power Consumption (W)  | 2X2=20/30/40 watts adjustable<br>2X4=40/50/60 watts adjustable |
| Lumen Output           | 2X2=2200-4400LM<br>2X4=4400-6600LM                             |
| LED Type               | Integral SMD 2835 LEDs   |
| Luminous Efficacy      | 120 Lumens per watt  |
| Beam angle             | 120°   |
| Colour Rendering Index | >80, >95 for 3500K   |
| LED Life (hours)       | 50,000   |
| Dimmable               | 0-10V  |
| Approvals              | cETLus, DLC  |

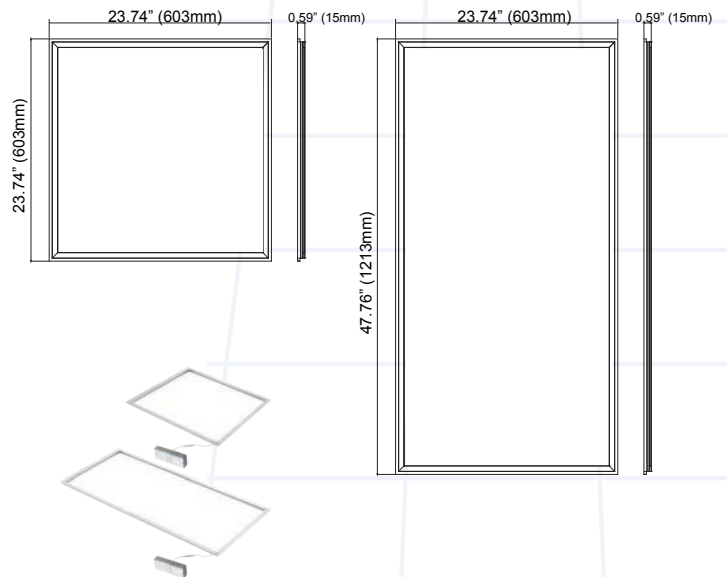

## OPTIONAL:

**NOTE:** driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.

