


LED Regressed Down Light CCT



YOUR CHOICE: SWITCH OR BLUETOOTH CCT CONTROL

Designed for remodel and new construction, LED Regressed Down Lights CCT are a versatile and affordable choice for countless applications. Available in two great options: CCT adjustable with slider selector switch (2700K/3000K/4000K) or CCT adjustable with bluetooth technology (2700K-5000K).

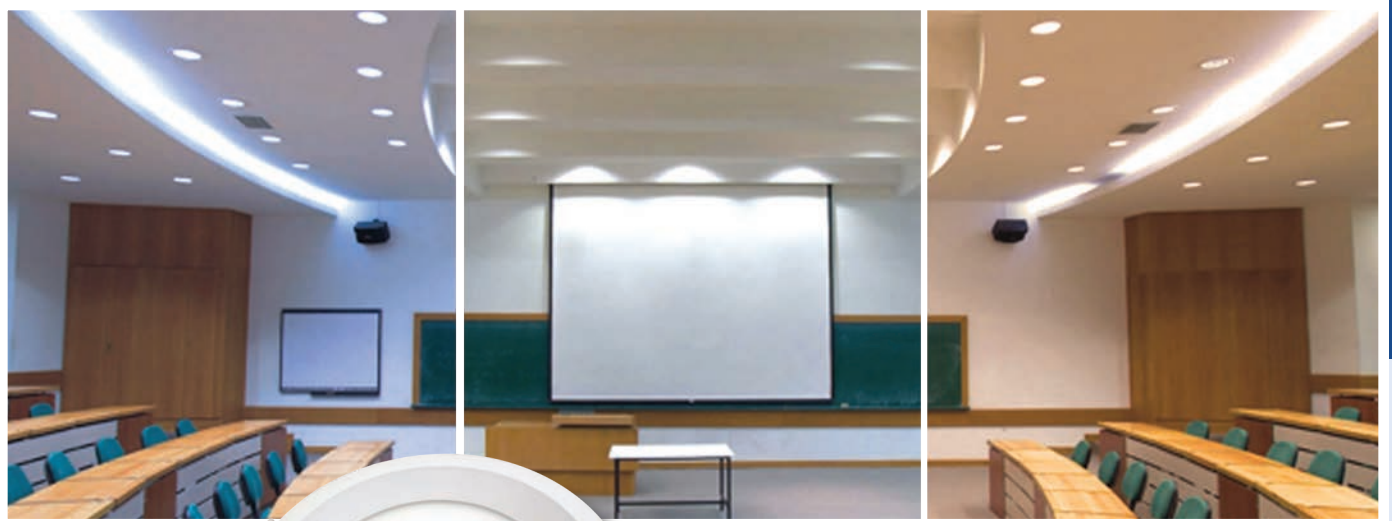

Regressed to reduce glare



Trim Rings
Sold Separately

RGL-4-TR-XX
RGL-6-TR-XX

XX= BK (Black)
BZ (Bronze)
SN (Satin Nickel)

Features

- ✓ Two convenient options: Slider Switch CCT Adjustable (2700/3000/4000K) and Bluetooth CCT Adjustable (2700-5000K) through the free smartphone app
- ✓ 120° beam spread
- ✓ Two spring loaded clips to attach to any ceiling material
- ✓ White finish. Interchangeable satin nickel, black and bronze trim rings available (sold separately).
- ✓ Regressed design to reduce glare
- ✓ Suitable for damp locations
- ✓ The driver is wired for 120V input
- ✓ Optional 347V Step-Down Transformer
- ✓ 90+ CRI
- ✓ 50,000 hour life
- ✓ 3 year limited warranty
- ✓ cETLus and Energy Star listed

Applications

- Kitchens & Pantries
- Lobbies & Hallways
- Banquet Halls
- Elevators
- Retail
- Restaurants
- Offices

1150 Northside Road, Unit 14, Burlington, ON, Canada L7M 1W8
Tel: 905-825-9592 • Fax: 905-825-8334 • lights@magiclite.com



magiclite.com

LED Regressed Down Light CCT

LED Regressed Down Light CCT offers the convenience of colour adjustment with slider selector switch (2700K/3000K/4000K) or with Bluetooth technology through the free smartphone app (2700K-5000K).

Finish

White finish. Interchangeable satin nickel, black and bronze trim rings available (sold separately).

Electrical

The driver is wired for 120V input.

Certification




cETLus listed for damp locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 3 years from date of purchase.

Specifications

LED Regressed Down Light CCT	
Product Code	CCT switch adjustable: RGL-4B-9W-SW RGL-6B-12W-SW
	CCT bluetooth adjustable: RGL-4B-9W-BT RGL-6B-12W-BT
Colour Temperature	Slider Switch CCT Adjustable: 2700/3000/4000K Bluetooth CCT Adjustable: 2700-5000K
Input Voltage	AC 100-277V
Power Consumption (W)	4" = 9 watts 6" = 12 watts
Lumen Output	4" = 630LM 6" = 840LM
Luminous Efficacy	70LM/W
Operating Temperature	-20°C to 40°C
Colour Rendering Index	90+
Installation Hole size:	4" = 4.13" (105mm) 6" = 6.18" (157mm)
LED Life (hours)	50,000
Approvals	cETLus, Energy Star

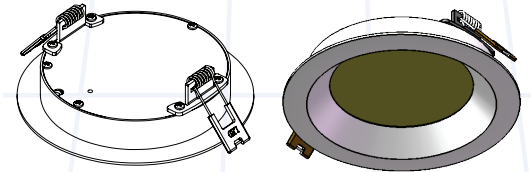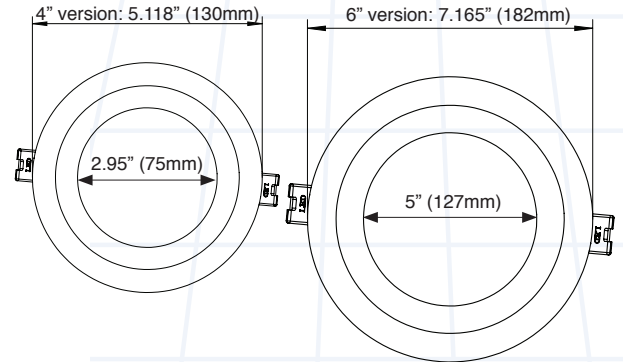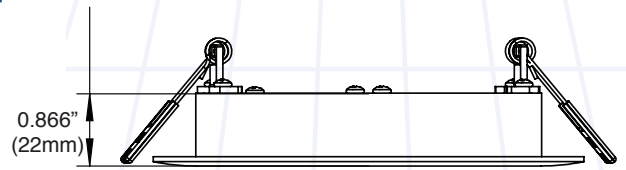

Available in Switch OR Bluetooth CCT control.

