

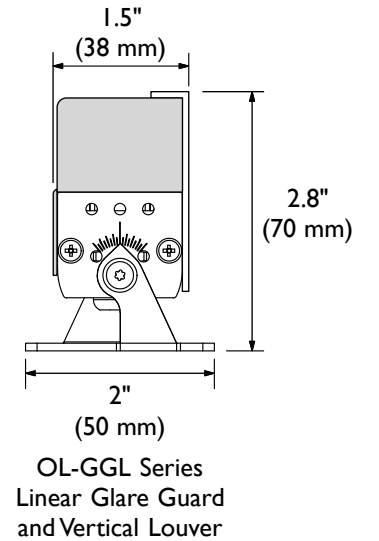
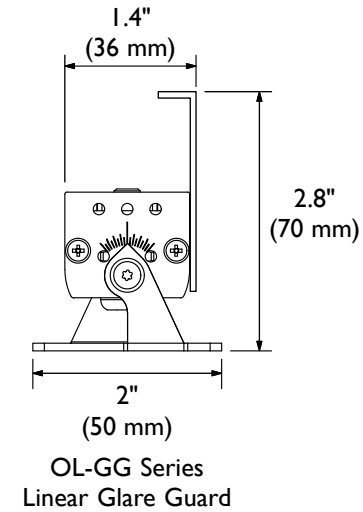
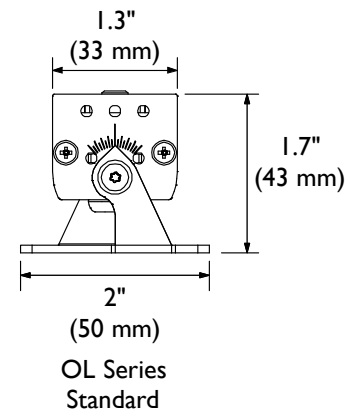


O'Links Series - 3 LED Fixture Submittal

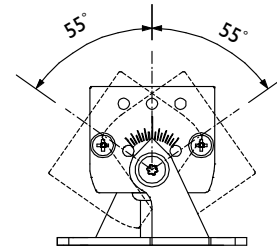

Catalog#	Watts Per Fixture	Max. Length
OL-(2700, 3000, 4000)-15D-3	6.3 (2.1W Per LED)	6 Fixtures (37.8W)
OL-GG-(2700, 3000, 4000)-15D-3	6.3 (2.1W Per LED)	6 Fixtures (37.8W)
OL-GGL-(2700, 3000, 4000)-15D-3	6.3 (2.1W Per LED)	6 Fixtures (37.8W)

O'Links Series Specifications	
Current: 700mA	
Power: 2.1 W Per LED	
IP Rating: 66	
CRI Value: 85	
Color	Output
2700K	150 Lm Per LED
3000K	160 Lm Per LED
4000K	180 Lm Per LED

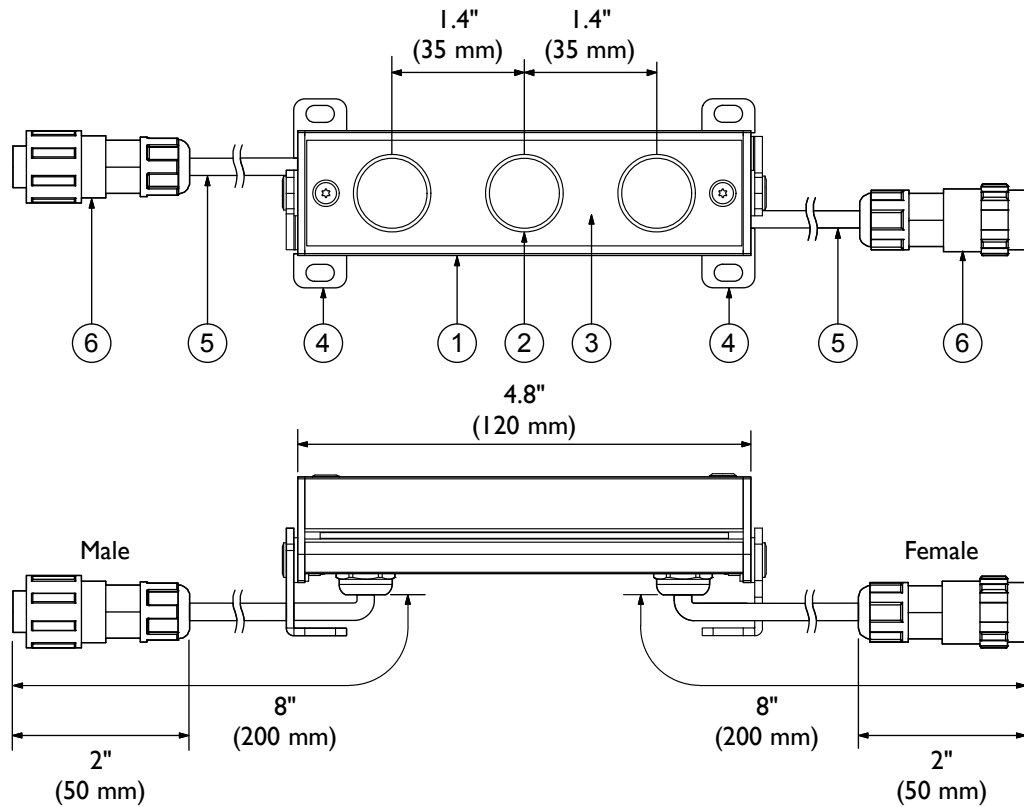

TOKISTAR LIGHTING INC.
 1015 E. DISCOVERY LANE
 ANAHEIM, CA 92801
 TEL: 714 772 7005 FAX: 714 772 7014
 email: info@tokistar.com Website: tokistar.com

O'Links Series Submittal	No.	Part	Material
Catalog#: OL-(GG, GGL)-(2700, 3000, 4000)-15D-3	1	Extrusion	Anodized Aluminum
Date: December 1, 2018	2	LED	Solid State LED
Drawn By: R. Cordova	3	Cover	Anodized Aluminum
Scale: 1:2	4	Adjustable Mounting Bracket	Stainless Steel
Weight: 230g per fixture	5	Power Cable	PVC Insulation (#18 AWG x 2)
	6	Connectors	Nylon (weather-resistant) IP67 rating