

# CCT Adjust Mini Flood Light

CCT Adjust Mini Flood Lights provide exceptional illumination for architectural, signage and landscape applications. CCT adjustable with a push of a button 3000K/4000K/5000K.



## FEATURES

- Compact size
- CCT adjustable 3000K/4000K/5000K
- High lumen output
- Easy to install and operate
- Very wide flood 150° x 120° (7H6V)
- Long life 50,000 hours
- Instant start, no flickering
- Available in 15W, 30W or 50W
- cULus listed for wet locations
- 5 year limited warranty

## APPLICATIONS

- Architectural lighting
- Signage
- Landscape lighting
- Exterior commercial


## PRODUCT CODES

FL - 15 - CT  
FL - 30 - CT  
FL - 50 - CT


## SPECIFICATIONS

Input Voltage	100 -277VAC
Adjustable Colour Temperature	Warm White (3000K) Neutral White (4000K) Cool White (5000K)
Power Consumption (W)	15W / 30W / 50W
Lumen Output	15W: 3000K=1725-1950LM / 4000K=2025-2250LM / 5000K=1875-2100LM 30W: 3000K=3450-3900LM / 4000K=4050-4500LM / 5000K=3750-4200LM 50W: 3000K=5750-6500LM / 4000K=6750-7500LM / 5000K=6250-7000LM
LED Type	SMD3030 (1W)
Beam Angle	150° x 120° (7H6V)
Operating Temperature	-20°C to 50°C
Colour Rendering Index	>80
Approvals	cULus listed for wet locations


15W and 30W

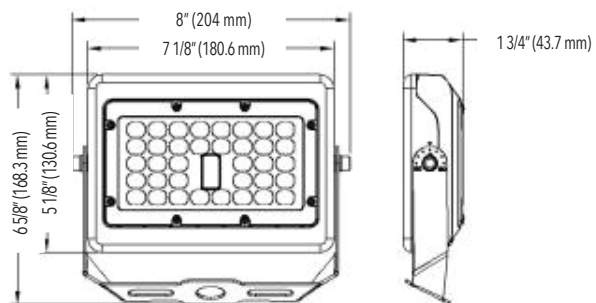

50W

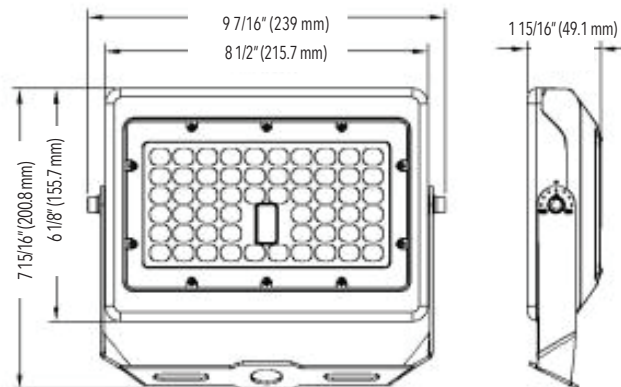


**MOUNTING ACCESSORIES**




**FL-TR**  
Trunnion mount bracket  
To use for wall and ground mount




**FL-Y-15/30, FL-Y-50**  
Yoke mount bracket  
To use for wall and ground mount

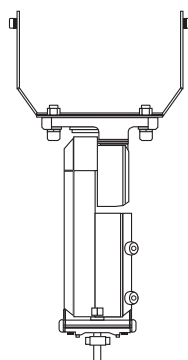

**FL-ADM-15/30, FL-ADM-50**  
Universal mount bracket  
For use on poles



**FL-SH-15/30**  
**FL-SH-50**  
Glare shield



**FL-WG-15/30**  
**FL-WG-50**  
Wire guard