



CCT Adjust Mini Flood Lights provide exceptional illumination for architectural, signage and landscape applications. CCT adjustable with a push of a button 3000K/4000K/5000K.

### 15W and 30W

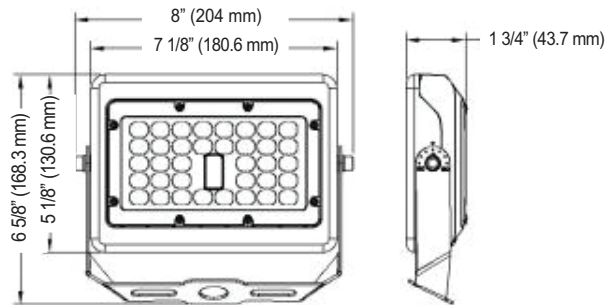

### 50W

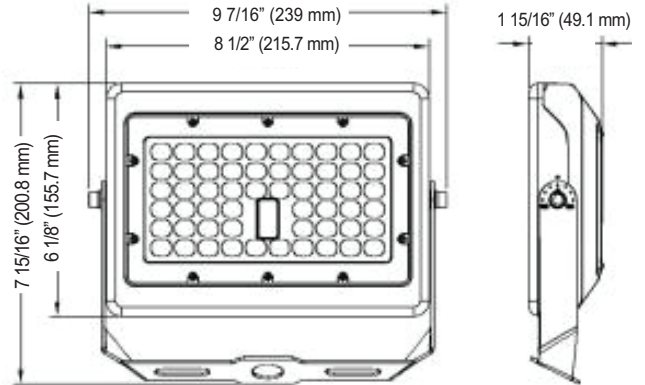

### Features

- Compact size
- CCT adjustable 3000K/4000K/5000K
- High lumen output
- Easy to install and operate
- Beam angle 150° x 120° (7H6V)
- Long life 50,000 hours
- Instant start, no flickering
- Available in 15W, 30W or 50W
- cULus listed for wet locations
- 5 year limited warranty


### Specifications

Electrical	100 -277VAC
Power consumption	15W / 30W / 50W
Colour Temperature	Warm White (3000K) Neutral White (4000K) Cool White (5000K)
Lumen Output	15W: 3000=1725-1950LM / 4000=2025-2250LM / 5000=1875-2100LM 30W: 3000=3450-3900LM / 4000=4050-4500LM / 5000=3750-4200LM 50W: 3000=5750-6500LM / 4000=6750-7500LM / 5000=6250-7000LM
LED Type	SMD3030 (1W)
Operating Temperature	-20°C to 50°C
CRI	>80
Approvals	cULus

### Ordering Code:

FL-15-CT  
 FL-30-CT  
 FL-50-CT

### Mounting Accessories:

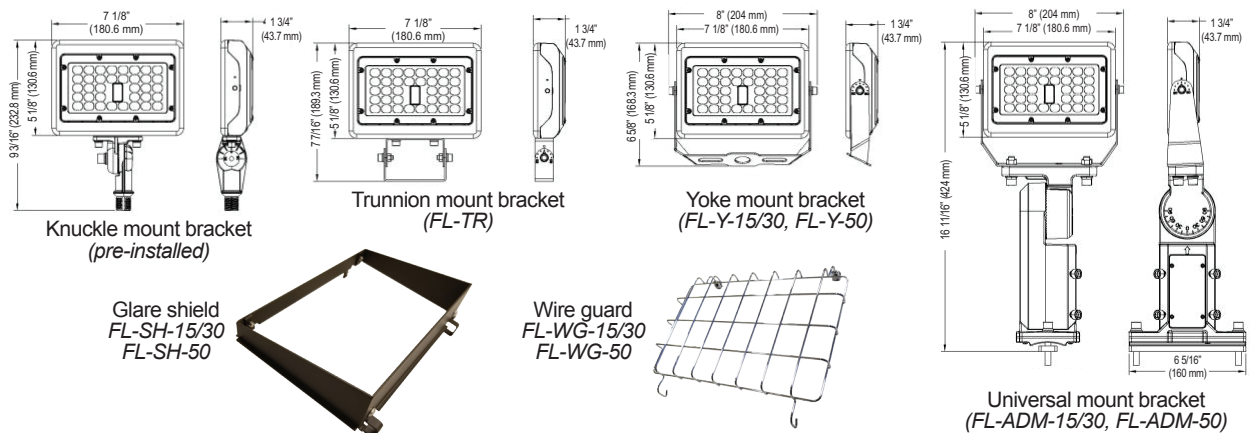

Project		Type	
Date		Contact	
Notes			