


# **T-LED Edge Light CCT**



T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.

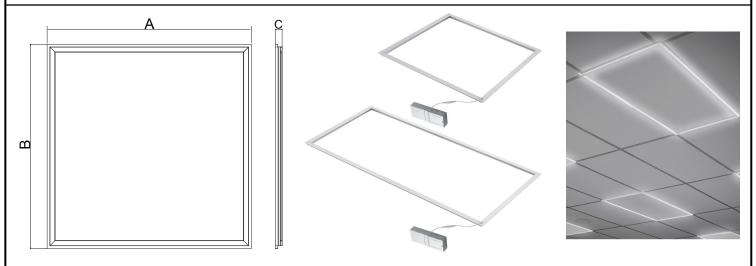

Dimensions	Α	В	С
2x2	23.74" (603mm)	23.74" (603mm)	0.59" (15mm)
2x4	47.76" (1213mm)	23.74" (603mm)	0.59" (15mm)

Size	Wattage Adjustment	CCT Adjustment
2x2	20/30/40W	3500/4000/5000K
2x4	40/50/60W	3500/4000/5000K

#### **Features**

- Ideal replacement for traditional flat panels and troffers
- · Non-flicker, no dark spots
- AC100-277V, 0-10V dimmable
- cETLus, DLC premium
- Ambient temperature: -20°C 45°C
- Dry locations
- 5 year limited warranty

### **Residential Applications**

- Kitchens
- Bathrooms
- Laundry rooms
- Pantries
- Rec Rooms

### **Commercial Applications**

- Retail
- Offices
- Hallways
- Elevators
- · Banquet Halls
- Restaurants

Specifications				
Colour Temperature	3500/4000/5000K adjustable			
Input Voltage	AC100-277V			
Power Consumption (W)	2X2=20/30/40 watts adjustable 2X4=40/50/60 watts adjustable			
Lumen Output	2X2=2200-4400LM 2X4=4400-6600LM			
CRI	>80			
LED Life	50,000 hours			
Dimmable	0-10V			
Beam angle	120°			
Approvals	cETLus, DLC			

## **Ordering Code:**

TLE-2X2-K40-3050 TLE-2X4-K60-3050

Project	Туре	
Date	Contact	
Notes		














# GICLITE T-LED Edge Light CCT

T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.

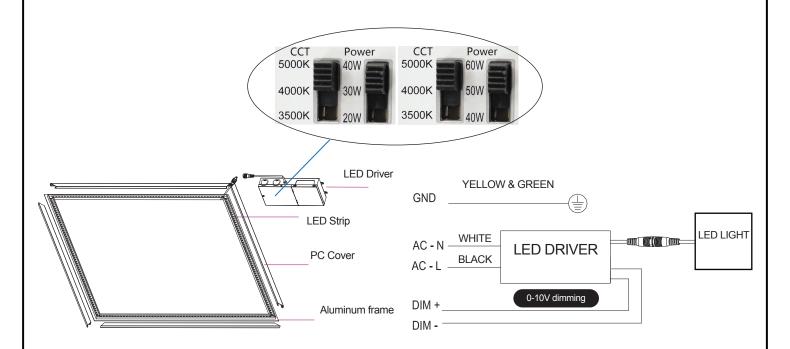

#### **OPTIONAL:**

NOTE: driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.













