AAGIC LITE

120V AC eStrip

An ideal solution for accent lighting in residential, commercial and retail applications, the 120V AC LED eStrip can be easily installed without the need of any additional driver, in indoor and outdoor applications.







FEATURES

- 120V AC input voltage
- High light efficiency, high PF and high lumens
- Constant current design, overvoltage protection
- Drop current when over temperature to protect product (Max. ambient working temperature: 55°C, light up for no more than 6 hours)
- Dimmable: TRIAC
- Do not need transformer box to change


AC to DC, connect with line voltage directly

- Ambient Working Temperature: -20 ~ 42°C (-4 ~ 107°F)
- IP65 PVC extrusion process
- Min.section 4 inch; Max.run 164FT
- With bared power cords on one side, it's more convenient for connecting
- ETL certified
- 5 years warranty indoor use; 3 years warranty outdoor use


APPLICATIONS

- · Building outlines
- Signage
- Decks
- Architectural features

		SPECIFICATION	DNS	
Product Code		ES-120V-27K-164FT	ES-120V-30K-164FT	ES-120V-40K-164FT
Electrical	Input Voltage	120V AC		
	Power Consumption	4W/Ft		
Specs	Color Temperature	2700K	3000K	4000K
	Efficacy (LM/Ft)	280LM	300LM	340LM
	CRI	90+		
	Dimmable	Yes		
LED	Туре	SMD2835		
	Life Span	30,000 Hours		
	Spacing	N/A		
	# per foot (304mm)	18 LEDs		
Design	Dimensions (Inches)	.79" W		
	Dimensions (Millimeters)	20mm W		
	Max Single Run Length	50M (164Ft)		
	Custom Cuttable	Cuttable every 10CM (3 15/16") – Factory only		
	Approved Location	Indoor/Outdoor		
Warranty	5 years warranty indoor use; 3 years warranty outdoor use			
Approvals	cETLus			



PRODUCT CODES

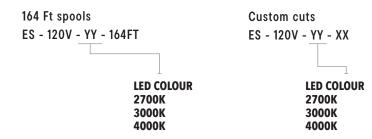

ACCESSORIES











ES-120V-EC End cap (Indoor & Outdoor)

ES-120V-EXT
4ft Aluminum extrusion

ES-120V-MC Mounting clips (Bag of 10)

ES-120V-PC 8Ft Power cord

ES-120V-PC-PL 5Ft Power cord with plug



ES-120V-JC-1FT

Jumper, 1Ft

ES-120V-JC-3FT Jumper, 3Ft

ES-120V-JC-6FT Jumper, 6Ft

ES-120V-JC-6IN Jumper, 6"

01