


24V Wall Washer

The 24V LED Wall Washer is engineered for illuminating architectural features, signage, and landscapes with its advanced lighting capabilities. It provides a versatile solution for both indoor and outdoor spaces, combining functionality with aesthetic enhancement.

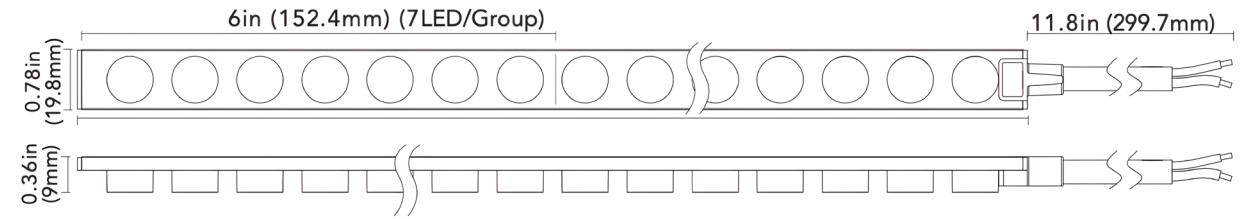

FEATURES

- Safe 24V DC operation (Requires our 24V driver)
- Low power consumption: 5.8W/FT
- Suitable for indoor and outdoor use
- Beam angle: 30°
- Available in 2700K, 3000K, 4000K colour temperatures
- Long life 30,000 hours
- Dimmable with dimmable drivers
- Field cuttable every 6" (Maximum run is 16ft.)
- Sold in 33 Rolls
- cULus certified for wet locations
- 3 years limited warranty

APPLICATIONS

- Architectural lighting
- Signage
- Landscape lighting
- Exterior/interior commercial

SPECIFICATIONS

Product Code	ES-LS2835-27K-42-24-30	ES-LS2835-30K-42-24-30	ES-LS2835-40K-42-24-30	
Electrical	Input Voltage	24V DC		
	Power Consumption	5.8W/Ft		
Specs	Colour Temperature	2700K	3000K	4000K
	Efficacy	100LM/W	105LM/W	110LM/W
	Luminous Flux	580LM/FT	610LM/FT	640LM/FT
	CRI	90+		
	Dimmable	Yes		
	Beam Angle	30°		
LED	Type	SMD2835		
	Life Span	30,000 Hours		
	Spacing	N/A		
	# per foot (304mm)	14		
Design	Dimensions	8mm (5/16") x 15mm (9/16")		
	Max Single Run Length	16Ft		
	Custom Cuttable	Every 6"		
	Approved Location	Indoor/Outdoor		
Mounting	Ceiling, floor			
Warranty	3 years			
Approvals	cULus for wet locations			

PRODUCT CODES

ES - LS2835 - 27K - 42 - 24 - 30

ES - LS2835 - 30K - 42 - 24 - 30

ES - LS2835 - 40K - 42 - 24 - 30

ACCESSORIES



NFLX-GLUE
Glue



ES-EC
End Cap



ES-MC
Mounting Clips
(4pcs/bag)




ES-WB
Wall Washer Wall Bracket Set
(2 pieces)



ES-PFC-6FT
Power Feed Connector




**ES-JC-6IN 6IN,
ES-JC-12IN 12IN,
ES-JC-3FT 3FT,
ES-JC-6FT 6FT**
Jumper Cable



ES-EXT
ES-EXT Aluminum extrusion (8FT), anodized black, for ceiling or floor mounting. For wall mounting, please see the wall mounting brackets

ES-EXT-XX
For shorter lengths.



Three wall mounting brackets available to enhance the wall washing effect (2 pieces):
**ES-MB-2IN 2IN
ES-MB-4IN 4IN
ES-MB-6IN 6IN**
Wall Mounting Bracket

INDOOR/OUTDOOR DIMMABLE DRIVERS

MLDRE-40-24-DM
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

MLDRE-96-24-DM
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NON DIMMABLE DRIVERS

MLDR-120-24 (Indoor/Outdoor)
120W hardwire
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

NOTE: For field cuttability you will need power supply cap, End cap and potentially jumper cables. All termination points must be glued with our NFLX-GLUE. Please reach out if you have any questions, we would be happy to help.