

5CCT LED Task Bar



Slim and elegant profile, linkable, and 5 colour temperatures adjustable



With its slim profile and 5 adjustable colour temperatures, the LED Task Bar is the perfect choice for the modern kitchen.

FEATURES

- Available in white finish
- 90+ CRI
- 120V Plug and cord and hardwire power cord available (sold separately)
- Available in 5 lengths:
LEDLB-5CCT-12=12 3/8" (315mm)
LEDLB-5CCT-18=17 1/2" (445mm)
LEDLB-5CCT-24=22 5/8" (575mm)
LEDLB-5CCT-36=34 7/16" (875mm)
LEDLB-5CCT-48=46 1/4" (1175mm)
- Easy installation
- 5 position switch for colour temperature adjustment
2700K/3000K/3500K/4000K/5000K
- Slim profile
- Dimmable with TRIAC dimmers
- Linkable up to 200W using end to end connectors or jumper cords
- 12", 18", 24" and 32" jumper cords available (sold separately)
- cETLus listed for indoor use
- 3 years limited warranty

APPLICATIONS

- Under cabinet task light
- Over cabinet accent light
- Display cases and exhibits
- Merchandising
- Wall units and bars
- Office work stations

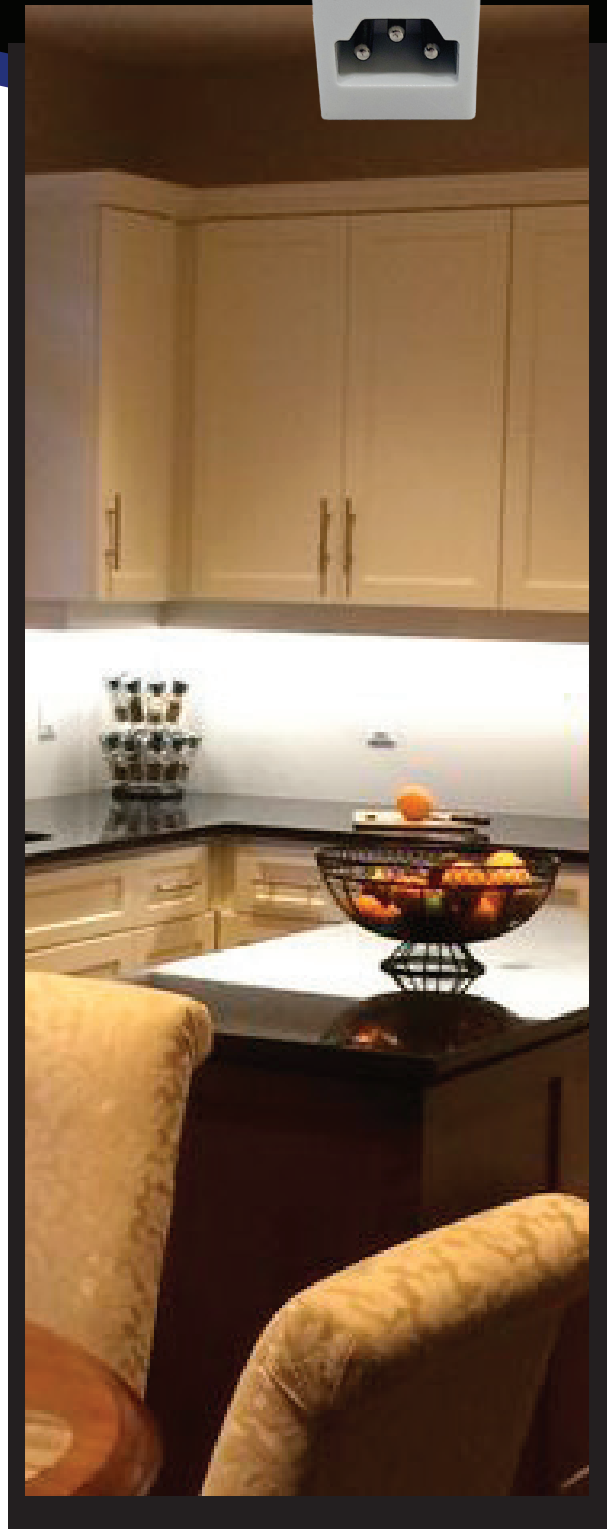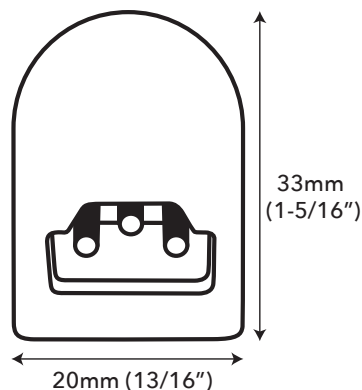

5CCT LED Task Bar

EASY INSTALLATION

Slim profile, linkable up to 200W using end to end connectors or jumper cords

ELECTRICAL

120V-277V AC

WARRANTY

3 Year Warranty. See full warranty details at www.magiclite.com.

NOTE:

Only LEDLB-5CCT-18, LEDLB-5CCT-24, LEDLB-5CCT-36 and LEDLB-5CCT-48 have ON/OFF switch.

ACCESSORIES (SOLD SEPARATELY)



LEDLB-J-12
12" jumper cable

LEDLB-J-18
18" jumper cable

LEDLB-J-24
24" jumper cable

LEDLB-J-32
32" jumper cable



LTSPRO-PC-72
72" power cord and plug

LTSPRO-HW-72
72" power cord for hardwire



LTSPRO-JB
Hardwire junction box
With ON/OFF switch, power line mounting on the back and 2 output ports, it allows for fixtures connections with jumper cables (sold separately), on both sides of the junction box.

SPECIFICATIONS

Product Code	LEDLB-5CCT-12 LEDLB-5CCT-18 LEDLB-5CCT-24 LEDLB-5CCT-36 LEDLB-5CCT-48
Colour Temperature	2700/3000/3500/4000/5000K
Input Voltage	120V-277V AC
Power Consumption (W)	5/8/12/16/20W
Lumens	LEDLB-5CCT-12 (443-541 LM) LEDLB-5CCT-18 (652-771 LM) LEDLB-5CCT-24 (966-1134 LM) LEDLB-5CCT-36 (1199-1393 LM) LEDLB-5CCT-48 (1599-1892 LM)
LEDs	SMD2835
Colour Rendering Index	90+
Linkable	Up to 200W
Life Span (hours)	35,000
Beam Angle	110°
Approvals	cETLus