

# 5CCT LED Thin Line Down Lights - Round



## Versatile, affordable, and 5 colour temperatures adjustable


With its slim profile and 5 adjustable colour temperatures, the 5CCT LED Thin Line Down Light is the perfect choice for the commercial and residential applications.

### FEATURES

- TRIAC dimmable
- 120° beam spread
- Adjustable colour temperature 2700K/3000K/3500K/4000K/5000K
- Two spring loaded clips to attach to any ceiling material
- White finish (interchangeable brushed nickel, black, bronze trim rings available - sold separately)
- Wet locations listed
- Temperature rating: -20°C-45°C
- No IC can required, for direct contact with insulation and combustible materials
- Connects directly to 120V power supply
- Optional 347V Step-Down Transformer (non-dimmable)
- 50,000 hour life
- 5 year limited warranty
- Airtight
- 90CRI
- cETLus and Energy Star listed

### APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms
- Bathrooms
- Lobbies
- Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Restaurants
- Offices



**YOUR TRUSTED LIGHTING PARTNER / MAGICLITE.COM**



# 5CCT LED Thin Line Down Lights - Round

## EASY INSTALLATION

Two spring loaded clips to attach to any ceiling material

## ELECTRICAL

120V/60Hz

## WARRANTY

5 Year Warranty. See full warranty details at [www.magiclite.com](http://www.magiclite.com).

## SIZES


Available in 3", 4", 6", 8" and 10" sizes.

## ACCESSORIES

Trim Rings



## APPEARANCE SIZE

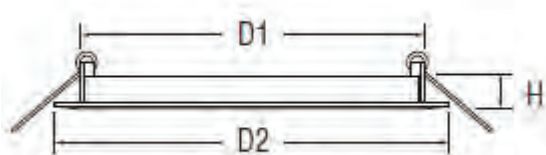

### 3"

D1=80mm (3.1")  
D2=95.5mm (3.8")  
H=11.5mm (1/2")

### 6"

D1=150mm (5.9")  
D2=174.5mm (6.9")  
H=11.5mm (1/2")

### 10"

D1=254mm (10")  
D2=274mm (10.8")  
H=11.5mm (1/2")

### 4"


D1=101mm (4")  
D2=120.1mm (4.7")  
H=11.5mm (1/2")

### 8"

D1=202mm (8")  
D2=226mm (8.9")  
H=11.5mm (1/2")

## SPECIFICATIONS

Product Code	DL-5CCT-3-WH DL-5CCT-4-WH DL-5CCT-6-WH DL-5CCT-8-WH DL-5CCT-10-WH
Colour Temperature	5-position switch for colour temperature adjustment 2700K / 3000K / 3500K / 4000K / 5000K
Input Voltage	120V/60Hz
Output Power (W)	6 / 9 / 12 / 15 / 20 Watts
Lumens	420 / 630 / 840 / 1050 / 1400LM
CRI	>90
Luminous Efficacy (lm/W)	70
Certification	cETLus, Energy Star
Dimmable	TRIAC
Life Span	50,000 hours
Installation Hole Size	3.35" (85mm) / 4.33" (110mm) / 6.3" (160mm) / 8.27" (210mm) / 10.16" (258mm)

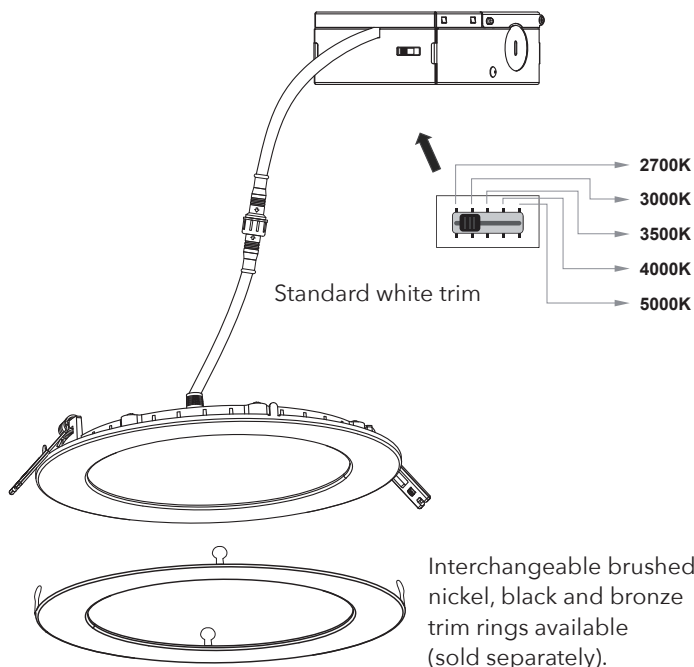

# 5CCT LED Thin Line Down Lights - Square



## Versatile, affordable, and 5 colour temperatures adjustable


With its slim profile and 5 adjustable colour temperatures, the 5CCT LED Thin Line Down Light is the perfect choice for many commercial and residential applications.

### FEATURES

- TRIAC dimmable
- 120° beam spread
- Adjustable colour temperature 2700K/3000K/3500K/4000K/5000K
- Two spring loaded clips to attach to any ceiling material
- White finish (interchangeable brushed nickel, black, bronze trim rings available - sold separately)
- Wet locations listed
- Temperature rating: -20°C-45°C
- No IC can required, for direct contact with insulation and combustible materials
- Connects directly to 120V power supply
- Optional 347V Step-Down Transformer (non-dimmable)
- 50,000 hour life
- 5 year limited warranty
- Airtight
- 90CRI
- cETLus and Energy Star listed

### APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms
- Bathrooms
- Lobbies
- Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Restaurants
- Offices



**YOUR TRUSTED LIGHTING PARTNER / [MAGICLITE.COM](http://MAGICLITE.COM)**



# 5CCT LED Thin Line Down Lights - Square

## EASY INSTALLATION

Two spring loaded clips to attach to any ceiling material

## ELECTRICAL

120V/60Hz

## WARRANTY

5 Year Warranty. See full warranty details at [www.magiclite.com](http://www.magiclite.com).

## SIZES


Available in 4" and 6" sizes.

## ACCESSORIES

Trim Rings



## APPEARANCE SIZE

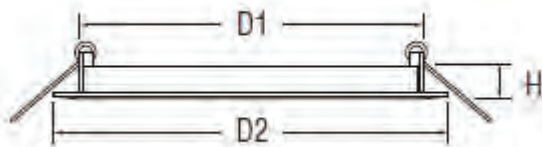

**4"**

D1=103mm (4.1")

D2=120mm (4.7")

H=11.3mm (0.4")

**6"**

D1=159mm (6.3")

D2=171.5mm (6.8")

H=11.3mm (0.4")

## SPECIFICATIONS

Product Code	DL-5CCT-4S-WH DL-5CCT-6S-WH
Colour Temperature	5-position switch for colour temperature adjustment 2700K / 3000K / 3500K / 4000K / 5000K
Input Voltage	120V/60Hz
Output Power (W)	9 / 12 Watts
Lumens	630 / 840LM
CRI	>90
Luminous Efficacy (lm/W)	70
Certification	cETLus, Energy Star
Dimmable	TRIAC
Life Span	50,000 hours
Installation Hole Size	4.33" (110mm) / 6.3" (160mm)

