

5CCT LED Gimbal Down Light




Versatile solution to direct light into your life

An ideal directional lighting solution for remodel and new construction, 5CCT LED Gimbal Down Lights are a versatile and affordable choice for countless applications.


FEATURES

- 120V AC input voltage
- TRIAC dimmable
- Low power consumption - 8W / 14W / 18W
- Available in 3", 4" and 6"
- Luminous flux: 600-650LM / 950-1000LM / 1150-1200LM
- CCT adjustable: 2700K / 3000K / 3500K / 4000K / 5000K
- 360° rotation
- Beam angle 38°
- Tilting angle 90°
- 90CRI
- cETLus, Energy Star certified
- 30,000 hour life
- 5-year limited warranty



APPLICATIONS

- | | |
|-----------------------|---------------|
| • Kitchens & Pantries | • Retail |
| • Lobbies & Hallways | • Restaurants |
| • Banquet Halls | • Offices |
| • Elevators | |

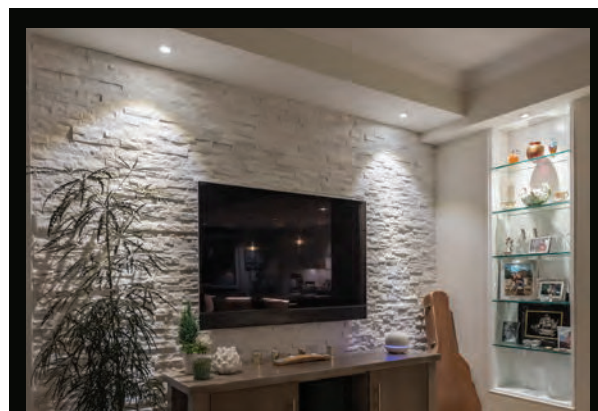

5CCT LED Gimbal Down Light

Colour Changing Temperature

2700K / 3000K / 3500K / 4000K / 5000K

Electrical

120V AC; 50,000 hour life

NOTE: Construction plates available for new construction:

LVLDL-CP-3-L3




LVLDL-CP-4-L3

LVLDL-CP-6-L3

**For detailed specs please consult our website*

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.



SPECIFICATIONS	
Product Code	GDL-3-8W-38-CCT-WH GDL-4-14W-38-CCT-WH GDL-6-18W-38-CCT-WH
Colour Temperature	2700K / 3000K / 3500K / 4000K / 5000K
Input Voltage	120V AC
Power Consumption (W)	8W / 14W / 18W
Luminous Flux	600-650LM / 950-1000LM / 1150-1200LM
Dimmable	TRIAC dimmable
Colour Rendering Index	90+
Rotation	360°
Beam Angle	38°
Tilting Angle	90°
Installation Hole Size	3" = 85mm (3 3/8") 4" = 112mm (4 7/16") 6" = 153mm (6")
Life Span (hours)	30,000
Warranty	5 year limited warranty
Approvals	cETLus, Energy Star

