


# CCT Indoor

Where applications demand a greater dynamic range within the White Light Spectrum. Hospitality, retail, residential and commercial.



## FEATURES


- 50,000 hours life
- High brightness 3528 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 16' (5M) spools
- 16' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- Controller sold separately
- 6 year limited warranty

## APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

## SPECIFICATIONS


<b>Product Code</b>		LTP-16-CCT-H90
<b>Electrical</b>	<b>Input Voltage</b>	24V DC
	<b>Power Consumption</b>	5.8W/Ft
<b>Specs</b>	<b>Colour Temperature</b>	2500K-7000K
	<b>CRI</b>	90+
	<b>Lumen Output</b>	261 Lumens per ft 3000K; 383 Lumens per ft 7000K
	<b>Efficacy</b>	77 LPW 3000K, 80 LPW 4000K, 88 LPW 6500K
	<b>Dimmable</b>	No
	<b>Beam Angle</b>	120°
<b>LED</b>	<b>Type</b>	High Brightness 3528 SMD LEDs
	<b>Life Span</b>	50,000 Hours
	<b>Spacing</b>	8.3mm
	<b># per foot (304mm)</b>	36
<b>Design</b>	<b>Dimensions (Inches)</b>	.39" W
	<b>Dimensions (Millimeters)</b>	10mm W
	<b>Max Single Run Length</b>	16Ft
	<b>Custom Cuttable</b>	2" (50mm)
	<b>Approved Location</b>	Indoor
<b>Warranty</b>	6 years	
<b>Approvals</b>	cETLus	

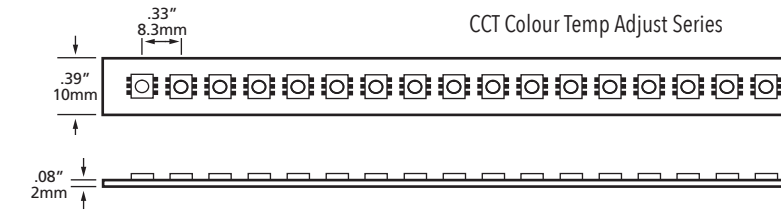

## PRODUCT CODES

16Ft spools  
LTP - 16 - CCT - H90

## ACCESSORIES



**LTP-001-CCT-6**  
72" Power feed connector for CCT indoor. Add "-O" for opposite end.



**LTP-002-CCT**  
In-line connector for CCT series indoor



**LTP-STP-CCT-6IN**  
6" (15cm) in-line connector for CCT Adjust



**VO-C10-8**  
Clear PVC mounting "U" channel



**LT-WIFI-AMP**  
WiFi Signal Amplifier for RGB, RGBW, CCT



**LT-WIFI-CTRL**  
3 IN 1 LED Strip Controller (WiFi+2.4G)



**LT-WIFI-RM**  
4-Zone RGB+CCT Remote

**NOTE:** See page 36-37 for the complete range of aluminum extrusions.

## NON DIMMABLE DRIVERS

**MLDR-120-24**  
Indoor/Outdoor driver  
Max 21.4' (6.5m) per single tap  
Max 28' (8.5m) combined 2 secondary taps  
Input: 100 - 240V AC  
Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

**MLDR-20-24JB**  
Indoor driver  
Max recommended load 18W 4.3' (1.3m)  
Input: 100 - 240V AC  
Output: 24V DC  
20 Watts  
4 1/8" x 4 1/8" x 1 1/2" (104.8 x 104.8 x 38.1mm)

