

CCT Indoor

Where applications demand a greater dynamic range within the White Light Spectrum. Hospitality, retail, residential and commercial.



CCT COLOUR TEMP ADJUST SERIES

FEATURES


- 50,000 hours life
- High brightness 3528 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 16' (5M) spools
- 16' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- Controller sold separately
- 6 year limited warranty

APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

SPECIFICATIONS

Product Code		LTP-16-CCT-H90
Electrical	Input Voltage	24V DC
	Power Consumption	5.8W/Ft
Specs	Colour Temperature	2500K-7000K
	CRI	>80
	Lumen Output	261 Lumens per ft 3000K; 383 Lumens per ft 7000K
	Efficacy	77 LPW 3000K, 80 LPW 4000K, 88 LPW 6500K
	Dimmable	No
	Beam Angle	120°
LED	Type	High Brightness 3528 SMD LEDs
	Life Span	50,000 Hours
	Spacing	8.3mm
	# per foot (304mm)	36
Design	Dimensions (Inches)	.39" W
	Dimensions (Millimeters)	10mm W
	Max Single Run Length	16Ft
	Custom Cuttable	2" (50mm)
	Approved Location	Indoor
Warranty	6 years	
Approvals	cETLus	

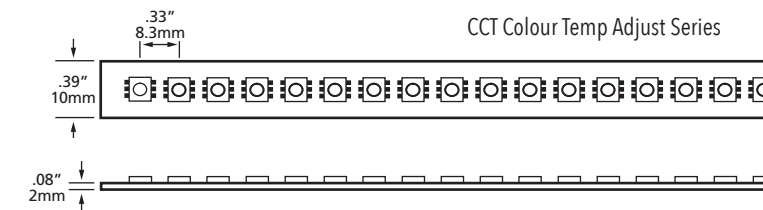

PRODUCT CODES

16Ft spools
LTP - 16 - CCT - H90

ACCESSORIES



LTP-001-CCT-6
72" Power feed connector for CCT indoor. Add "-O" for opposite end.



LTP-002-CCT
In-line connector for CCT series indoor



LTP-STP-CCT-6IN
6" (15cm) in-line connector for CCT Adjust



VO-C10-8
Clear PVC mounting "U" channel



LT-WIFI-AMP
WiFi Signal Amplifier for RGB, RGBW, CCT

NOTE: See page 36-37 for the complete range of aluminum extrusions.

NON DIMMABLE DRIVERS

MLDR-120-24
Indoor/Outdoor driver
Max 21.4' (6.5m) per single tap
Max 28' (8.5m) combined 2 secondary taps
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

MLDR-20-24JB
Indoor driver
Max recommended load 18W 4.3' (1.3m)
Input: 100 - 240V AC
Output: 24V DC
20 Watts
4 1/8" x 4 1/8" x 1 1/2" (104.8 x 104.8 x 38.1mm)