

Dim to Warm

Suitable for both hospitality and residential applications creating an inviting atmosphere.



FEATURES


- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- Field cuttable every 50mm (2")
- Low power consumption
- Auto Warm-dim technology
- Available in 16' (5m) and 100' (30.48m) spools (custom cuts available)
- 16' spools come with 6Ft pre-soldered power feeds
- Safe, 24V DC operation
- Dim-to-warm: 1800k to 3000K
- No special controllers required
- 6 years limited warranty

APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

SPECIFICATIONS

Product Code		LTP-XX-WW-DIM-H90 (XX: Length in feet; WW: Warm white)
Electrical	Input Voltage	24V DC
	Power Consumption	5.5W/Ft
Specs	Colour Temperature	1800-3000K
	CRI	90+
	Lumen Output	449LM/Ft
	Efficacy	82 LPW
	Dimmable	Yes
	Beam Angle	120°
LED	Type	2835 LEDs
	Life Span	50,000 Hours
	Spacing	2mm
	# per foot (304mm)	240
Design	Dimensions (Inches)	.39" W
	Dimensions (Millimeters)	10mm W
	Max Single Run Length	16Ft
	Custom Cuttable	2" (50mm)
	Approved Location	Indoor
Warranty		6 years
Approvals		cETLus

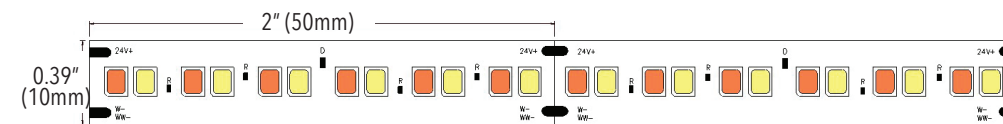

PRODUCT CODES

XX: Length in feet; WW: Warm white

16Ft spools

LTP - 16 - WW - DIM - H90


100Ft spools

LTP - 100 - WW - DIM - H90

Custom cuts

LTP - XX - WW - DIM - H90

ACCESSORIES



LTP-001-HD-HP-6
72" Power feed connector for high density indoor



LMSII-001
Terminal block and junction box for connection to additional lengths of power cable if needed



VO-C10-8
Clear PVC mounting "U" channel

NOTE: See page 36-37 for the complete range of aluminum extrusions.

INDOOR/OUTDOOR DIMMABLE DRIVERS

MLDRE-40-24-DM

Max 6.5' (1.98m)
Min 8 Watts, 1.45' (0.44m)
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

MLDRE-96-24-DM

Max 16' (5m)
Min 8 Watts, 1.45' (0.44m)
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

