

High Density, High Power Indoor



Ideal for display cabinets needing high illumination.
Can be used as a wall grazer offering great vertical illumination.

HIGH DENSITY SINGLE COLOUR LTP-HD SERIES

FEATURES


- 1 Bin
- 2 Step MacAdam Ellipse
- 3oz PCB board
- 3M Adhesive
- 50,000 hours life
- High brightness 3528 Epistar LEDs
- Field cuttable
- Low power consumption
- Available in 16' (5m) and 100' (30.48m) spools (custom cuts available)
- 16' spools come with 6Ft pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)
- Fully dimmable with dimmable power supplies (sold separately)
- 6 years limited warranty

APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

SPECIFICATIONS

Product Code		LTP-XX-YY-HD-H90
Electrical	Input Voltage	24V DC
	Power Consumption	5.8W/Ft
Specs	Colour Temperature	2700/3000/4000/6500K
	CRI	90+
	Lumen Output	450 Lumens per ft 3000K; 468 Lumens per ft 4000K; 514 Lumens per ft 6500K
	Efficacy	77 LPW 3000K; 80 LPW 4000K; 88 LPW 6500K
	Dimmable	Yes
	Beam Angle	120°
LED	Type	High Brightness 3528 Epistar LEDs
	Life Span	50,000 Hours
	Spacing	1" (25mm)
	# per foot (304mm)	72
Design	Dimensions (Inches)	.39" W
	Dimensions (Millimeters)	10mm W
	Max Single Run Length	16Ft
	Custom Cuttable	1" (25mm)
	Approved Location	Indoor
Warranty	6 years	
Approvals	cETLus	

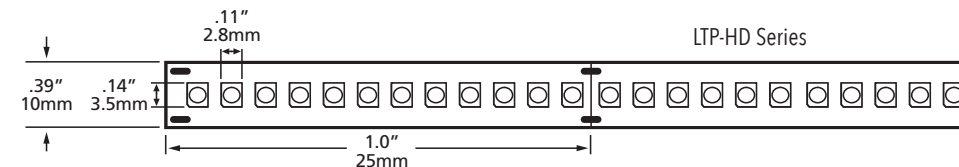

PRODUCT CODES

16Ft spools
LTP - 16 - YY - HD - H90

LED COLOUR
2700K
3000K
4000K
6500K


100Ft spools
LTP - 100 - YY - HD - H90

LED COLOUR
2700K
3000K
4000K
6500K

Custom cuts
LTP - XX - YY - HD - H90

LED COLOUR
2700K
3000K
4000K
6500K

ACCESSORIES



LTP-001-HD-HP-6
72" Power feed connector for high density indoor



LMSII-001
Terminal block and junction box for connection to additional lengths of power cable if needed



VO-C10-8
Clear PVC mounting "U" channel



LV-SPIR-1CH-LV
PIR Motion Sensor, 1 Channel, 24V DC
NOTE: To be used with non dimmable drivers only

NOTE: See page 36-37 for the complete range of aluminum extrusions.

INDOOR/OUTDOOR DIMMABLE DRIVERS

MLDRE-40-24-DM

Max recommended load 36W or 6' LED Strip, min 8W or 2' LED Strip
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

MLDRE-96-24-DM

Max recommended load 90W or 16' LED Strip, min 8W or 2' LED Strip
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NON DIMMABLE DRIVERS

MLDR-120-24

Indoor/Outdoor driver
Max. recommended load 90W or 16' (4.8m) per single tap, 120W or 20' (6.1m) combined two secondary taps.
120W hardwire
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

MLDR-20-24JB

Indoor driver
Max recommended load 18W or 3' LED Strip
20W hardwire
Input: 100 - 240V AC
Output: 24V DC
4 1/8" x 4 1/8" x 1 1/2" (104.8 x 104.8 x 38.1mm)