

High Power eStrip

The High Power LED eStrip is an advanced version that delivers twice the lumen output compared to the standard eSTRIP, enhancing illumination capabilities.



FEATURES

- 40,000 hours life
- Safe low voltage (24V)
- Virtually maintenance free
- Ultra low power consumption
- Available in 40' spools (custom cuts available)
- Crushproof to 100psi
- Field cuttable
- Inter-connectable
- Highly flexible (min. bend radius 1.5")
- Indoor/outdoor use
- Impact resistant
- Dimmable
- 2 years limited warranty

APPLICATIONS

- Building outlines
- Coves
- Stairway and aisle lighting
- Signage
- Backlit panels
- Decks
- Edgelit glow
- Emergency lighting
- Pathway lighting
- Billboards
- Highlighting architectural features
- Over/Under cabinets

SPECIFICATIONS

Product Code		LESHP-XX-YY
Electrical	Input Voltage	24V DC
	Power Consumption	2.2W/Ft
Specs	Colour Temperature	3000/5800K
	Lumen Output	137 Lumens per ft 3000K; 155 Lumens per ft 5800K
	LED Colours	3000K and 5800K,
	PVC Body Colour	Clear
	Min/Max Surface Temp for Mounting	-40°C to 40°C (-40°F to 104°F)
	Dimmable	Yes
	Beam Angle	120°
LED	Type	N/A
	Life Span	40,000 Hours
	Spacing	1" (25.4mm)
	# per foot (304mm)	12
Design	Dimensions (Inches)	.25 x .5"
	Dimensions (Millimeters)	6 x 12mm
	Max Single Run Length	40Ft
	Custom Cuttable	6" (152.4mm)
	Approved Location	Indoor/Outdoor
Warranty	2 years	
Approvals	cETLus	

PRODUCT CODES

40Ft spools


LESHP - 40 - YY

HIGH POWER LED eStrip
LED COLOUR
3000K
5800K

Custom Cuts

LESHP - XX - YY

HIGH POWER LED eStrip
LED COLOUR
3000K
5800K

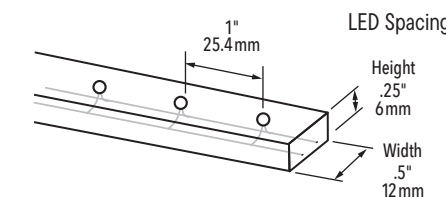

ACCESSORIES



LES-001-6BR
Outdoor 6' Power connector for burial connections, 1/4" x 1/2" (6mm x 12mm). Comes with end cap



LES-001-12BR
Outdoor Power connector, with SJTW-2 12 ft wires for burial connections 1/4" x 1/2" (6mm x 12mm) Comes with end cap



LES-STP-2BR
Outdoor 2' Step cord for burial connections



LES-STP-12BR
Outdoor 12' Step cord (shown) for burial connections



LES-FLEX-BR
Outdoor Step cord for burial connections

LES-001-6CL
Indoor 6' Power connector for through wall connections

LES-001-12CL
Indoor 12' Power connector for through wall connections

LES-STP-2CL
Indoor 2' Step cord (shown) for through wall connections

LES-STP-12CL
Indoor 12' Step cord for through wall connections

LES-FLEX-CL
Indoor Step cord (shown) for through wall connections



LMSII-001
Terminal block and junction box for connection to additional lengths of power cable if needed



LES-BFLN
L type connector, 1/4" X 1/2" (6mm x 12mm)



LES-002
In-Line connector set, male and female, 1/4" X 1/2" (6mm x 12mm)




LES-BFTD
T type connector, 1/4" X 1/2" (6 x 12mm), male connector in bottom




LES-003-2
Cutting end cap, 0.25" X 0.5" (6mm x 12mm)



LES-BFTR
T type connector, 1/4" X 1/2" (6 x 12mm), male connector in right or left



LES-005
Wood nail clips, 1/4" X 1/2" (6mm x 12mm)



LES-008
Tie wrap and mounting saddle



LES-BFXN
X type connector, 1/4" X 1/2" (6mm x 12mm)



LES-BFDN
6 x 12mm splice kit (pins, pad and shrink tube)



NN-C10-POLY
Polycarbonate 1/2" U channel track for outdoor use



NN-C10-8
PVC 1/2" U channel track for indoor use

INDOOR/OUTDOOR DIMMABLE DRIVERS

MLDRE-40-24-DM
Max 16' (4.87m)
Min 8 Watts, 4' LED eStrip (1.2m)
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

MLDRE-96-24-DM
Max 40' (12.1m)
Min 8 Watts, 4' LED eStrip (1.2m)
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NON DIMMABLE DRIVERS

MLDR-120-24 (Indoor/Outdoor)
Max 40' (12.1m) per single tap
Max 54' (16.46m) combined 2 secondary taps
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

MLDR-20-24JB (Indoor)
Max recommended load 18W
LED eStrip; Input: 100 - 240V AC
Output: 24V DC, 20 Watts
4 1/8" x 4 1/8" x 1 1/2" (104.8 x 104.8 x 38.1mm)

NOTE: For outdoor installations, please add E-KO-SR strain relief (2pcs/driver).