
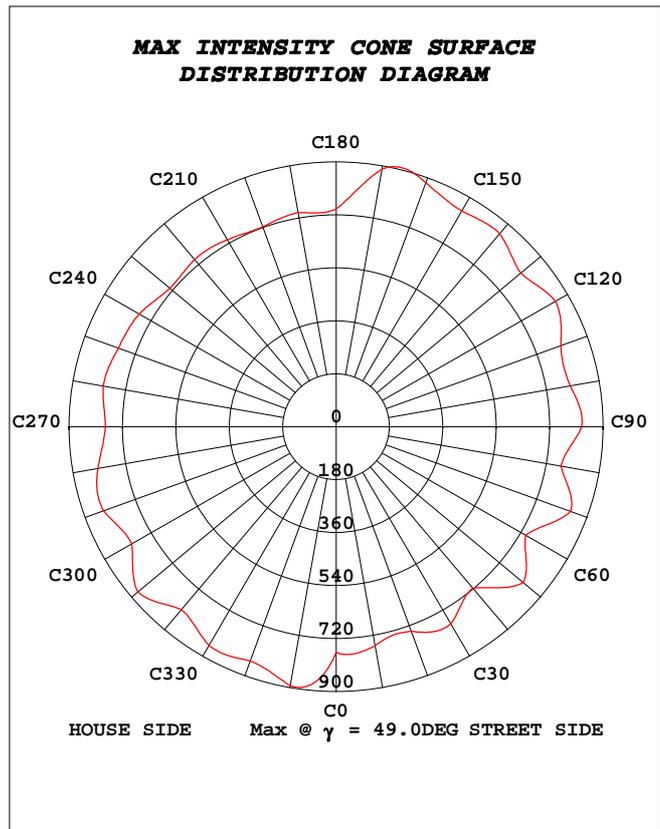


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.63 lm/W			
MODEL		Imax(cd)	893.4	η street_up(%)	3.4
NOMINAL POWER(W)		LOR(%)	100.0	η street_down(%)	46.3
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3029	η house_up(%)	3.7
NOMINAL FLUX(lm)	3028.89	MAXIMUM @(C, γ)	350,49.0	η house_down(%)	46.5
LAMPS INSIDE	1	η up(%)	7.2	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	120	η down(%)	92.8	SLI	20.555

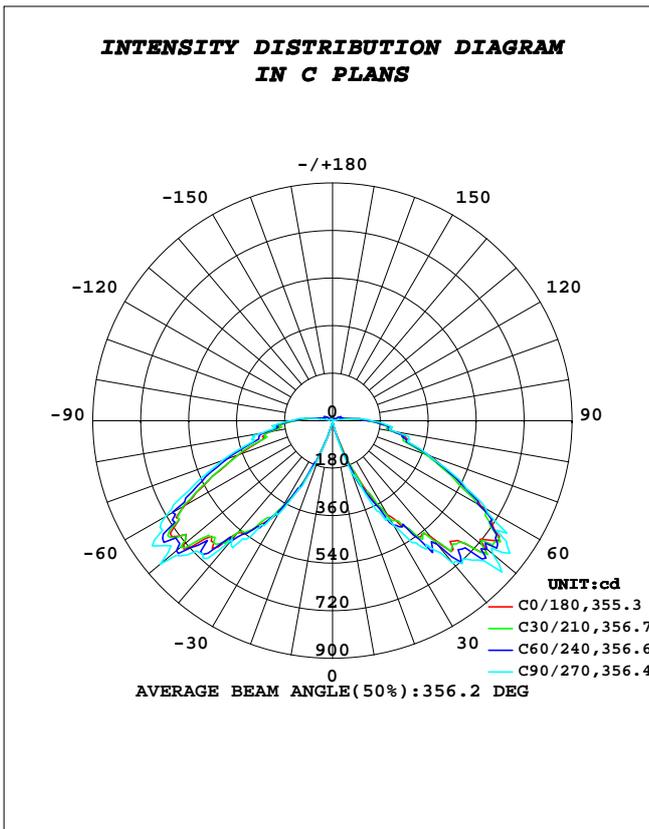


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:Paul
Test Date:19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity:65.1%
Test Distance:1.136m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

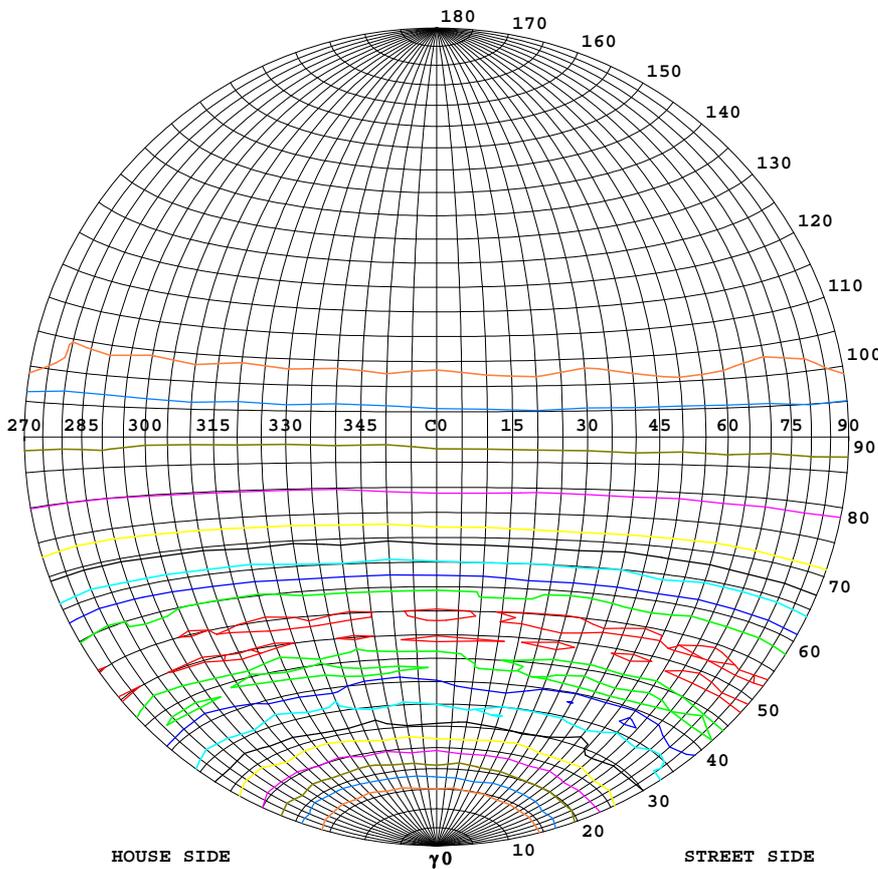

Classification:



IES:Type V - Short
 CIE:Average - Short
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:92.71cd/klm
 Max.At90:56.53cd/klm
 Max.80-90:92.71cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
I _{max} =100%	893
90%	804
80%	715
70%	625
60%	536
50%	447
40%	357
30%	268
20%	179
10%	89
5%	45

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:Paul
Test Date:19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity:65.1%
Test Distance:1.136m [K=1.0000]
Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

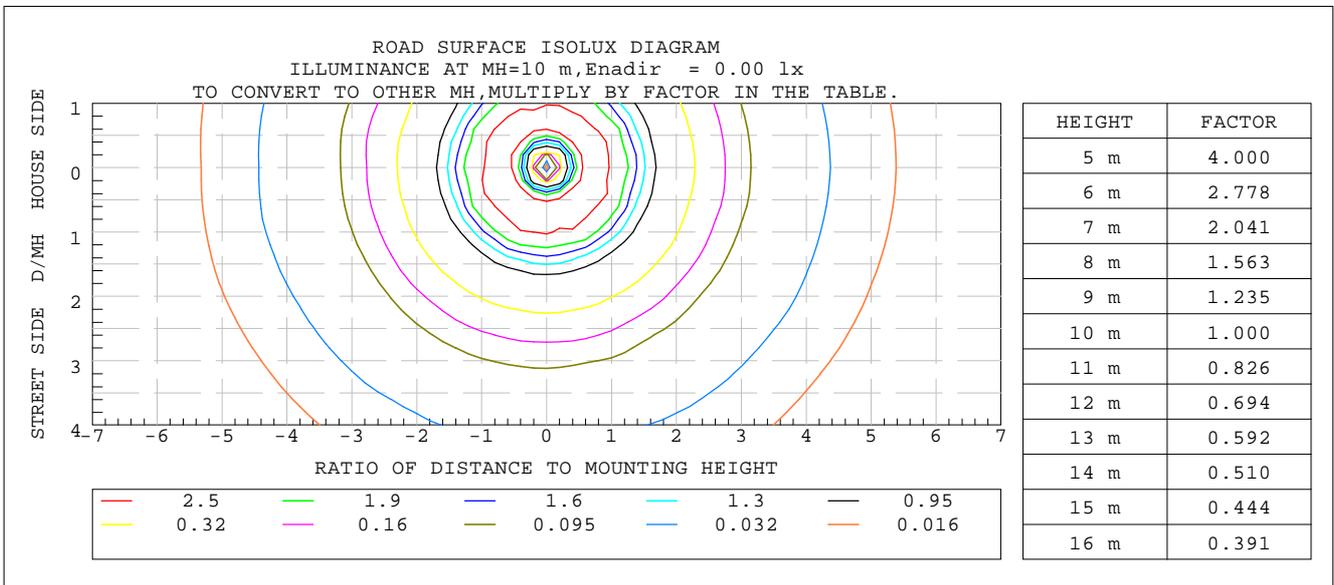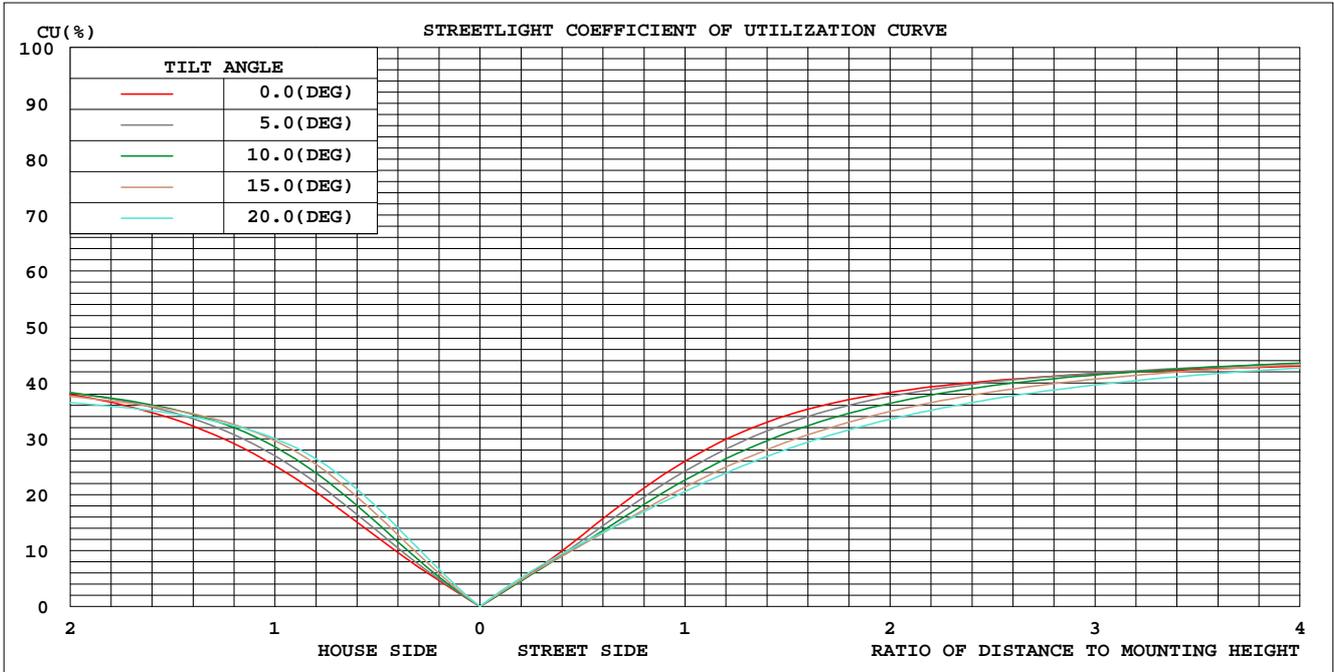

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:



ZONAL FLUX DIAGRAM

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 Lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	7.062	6.324	5.565	7.920	6.234	4.511	3.931	5.127	0- 10	0.1732	0.1732	0.01,0.01
20	141.1	167.3	197.0	166.3	123.9	109.3	124.0	128.2	10- 20	16.65	16.83	0.56,0.56
30	412.7	410.5	452.8	472.6	394.2	381.8	413.9	414.9	20- 30	135.6	152.4	5.03,5.03
40	573.7	604.7	705.7	680.0	554.2	567.7	586.6	674.9	30- 40	335.2	487.6	16.1,16.1
50	747.3	725.4	786.6	797.3	728.9	763.8	846.0	845.3	40- 50	557.7	1045	34.5,34.5
60	642.3	618.8	662.9	672.5	640.5	666.4	723.2	751.3	50- 60	681.4	1727	57,57
70	386.8	378.4	385.5	399.9	372.9	399.7	441.6	446.1	60- 70	531.0	2258	74.5,74.5
80	228.4	222.6	235.0	242.9	232.7	247.5	268.2	268.5	70- 80	333.4	2591	85.5,85.5
90	132.4	131.7	141.3	152.1	141.9	148.5	155.8	164.1	80- 90	221.1	2812	92.8,92.8
100	49.26	49.88	30.68	63.29	58.09	62.55	34.90	69.19	90-100	109.9	2922	96.5,96.5
110	32.89	34.31	5.063	38.31	35.54	34.09	11.76	37.97	100-110	41.92	2964	97.9,97.9
120	28.38	27.95	5.788	32.60	30.03	29.93	10.31	32.15	110-120	32.21	2996	98.9,98.9
130	7.966	8.002	3.850	9.183	8.839	9.500	5.785	9.380	120-130	17.09	3013	99.5,99.5
140	9.729	9.637	4.567	9.773	8.699	8.935	8.305	10.46	130-140	6.065	3019	99.7,99.7
150	8.020	8.201	3.588	7.751	8.470	8.735	6.925	9.317	140-150	5.928	3025	99.9,99.9
160	4.096	4.161	2.543	3.770	3.995	4.447	4.100	4.737	150-160	2.785	3028	100,100
170	1.430	1.242	0.9709	1.021	1.306	1.537	1.535	1.763	160-170	0.7894	3029	100,100
180	0	0	0	0	0	0	0	0	170-180	0.0639	3029	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:Paul
 Test Date:19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity:65.1%
 Test Distance:1.136m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

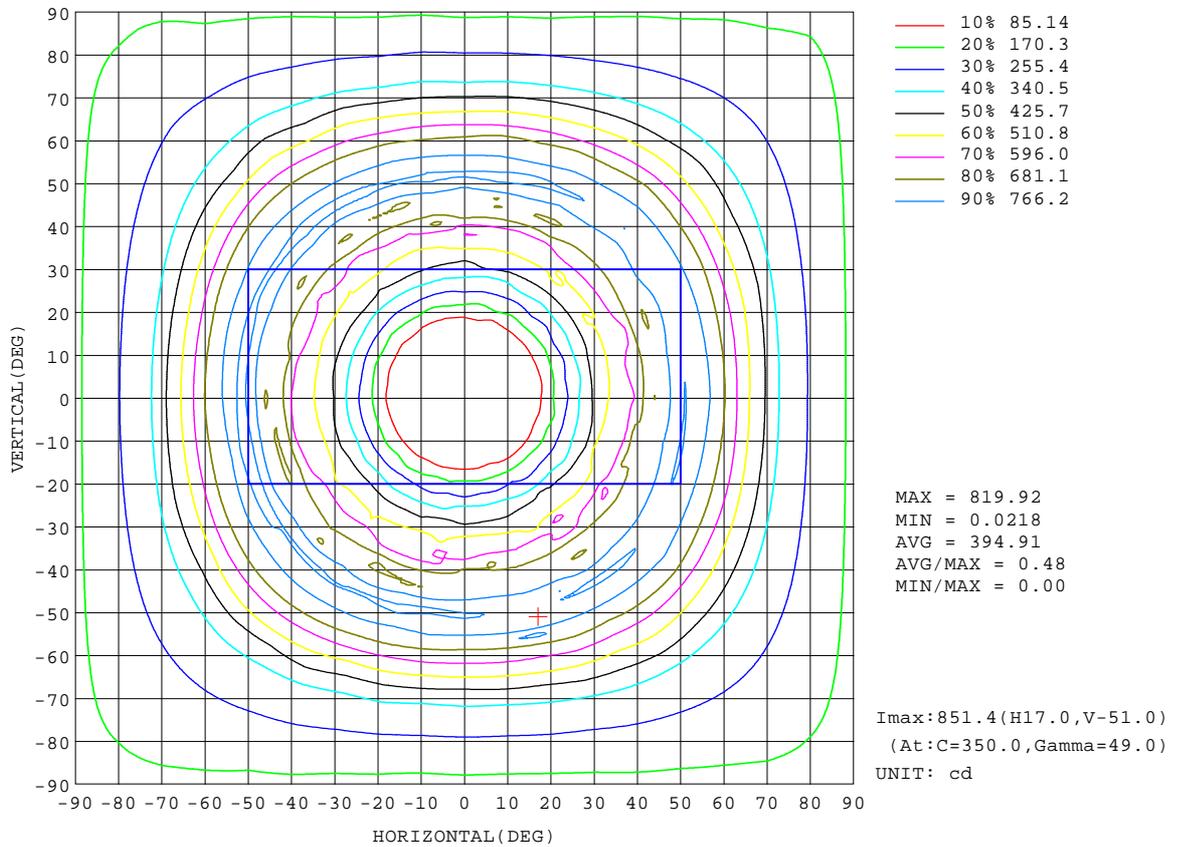

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:

Planar Illuminance Curve

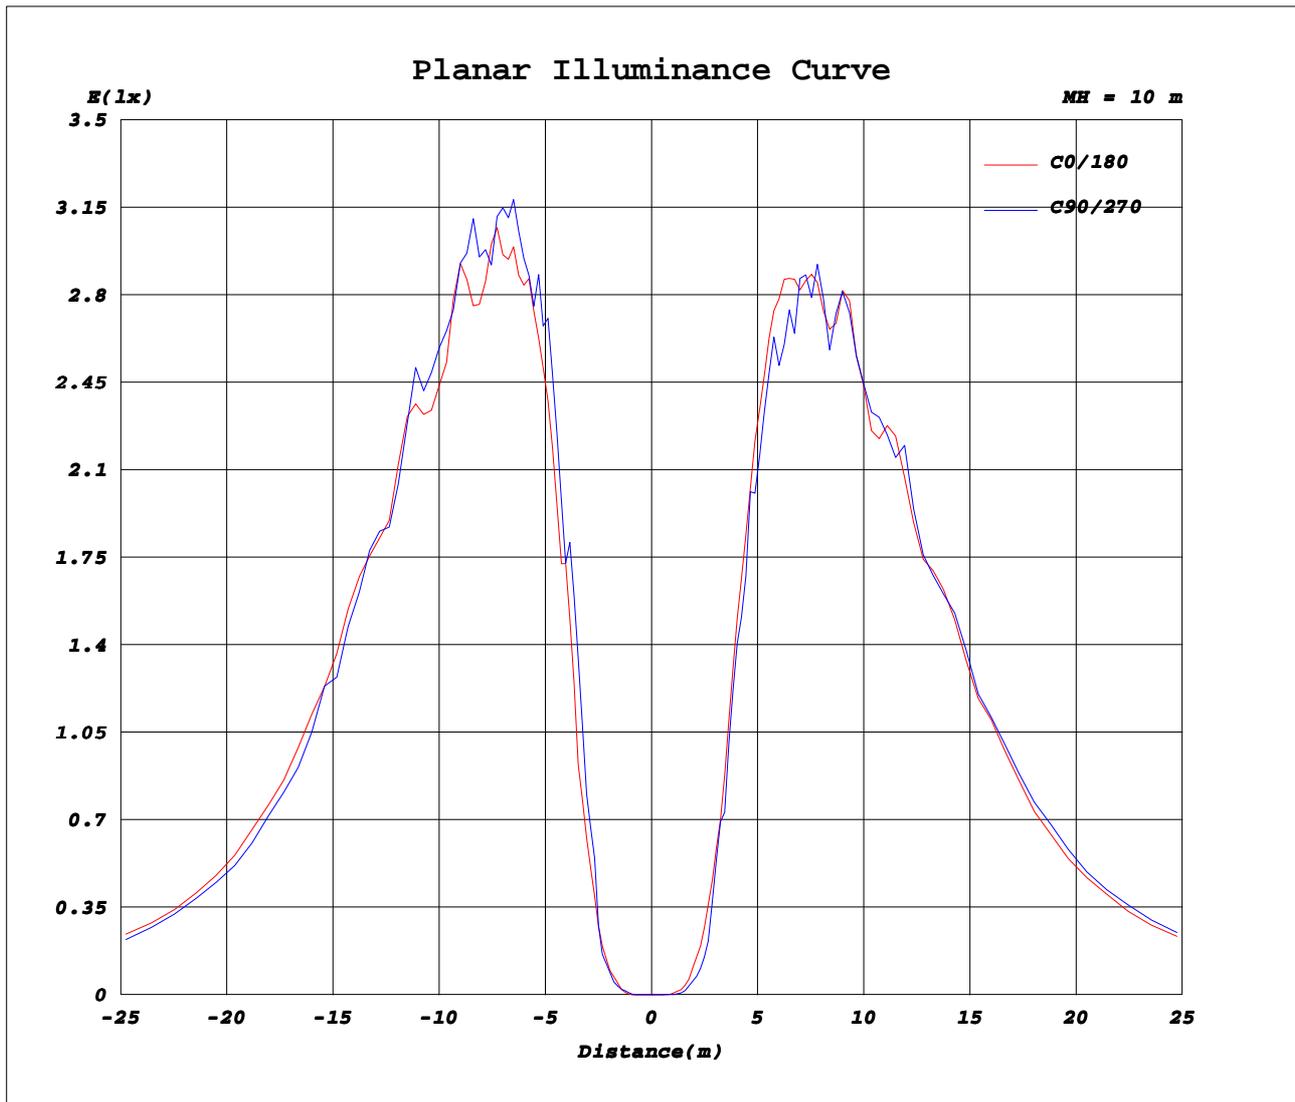


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:

LCS REPORT

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

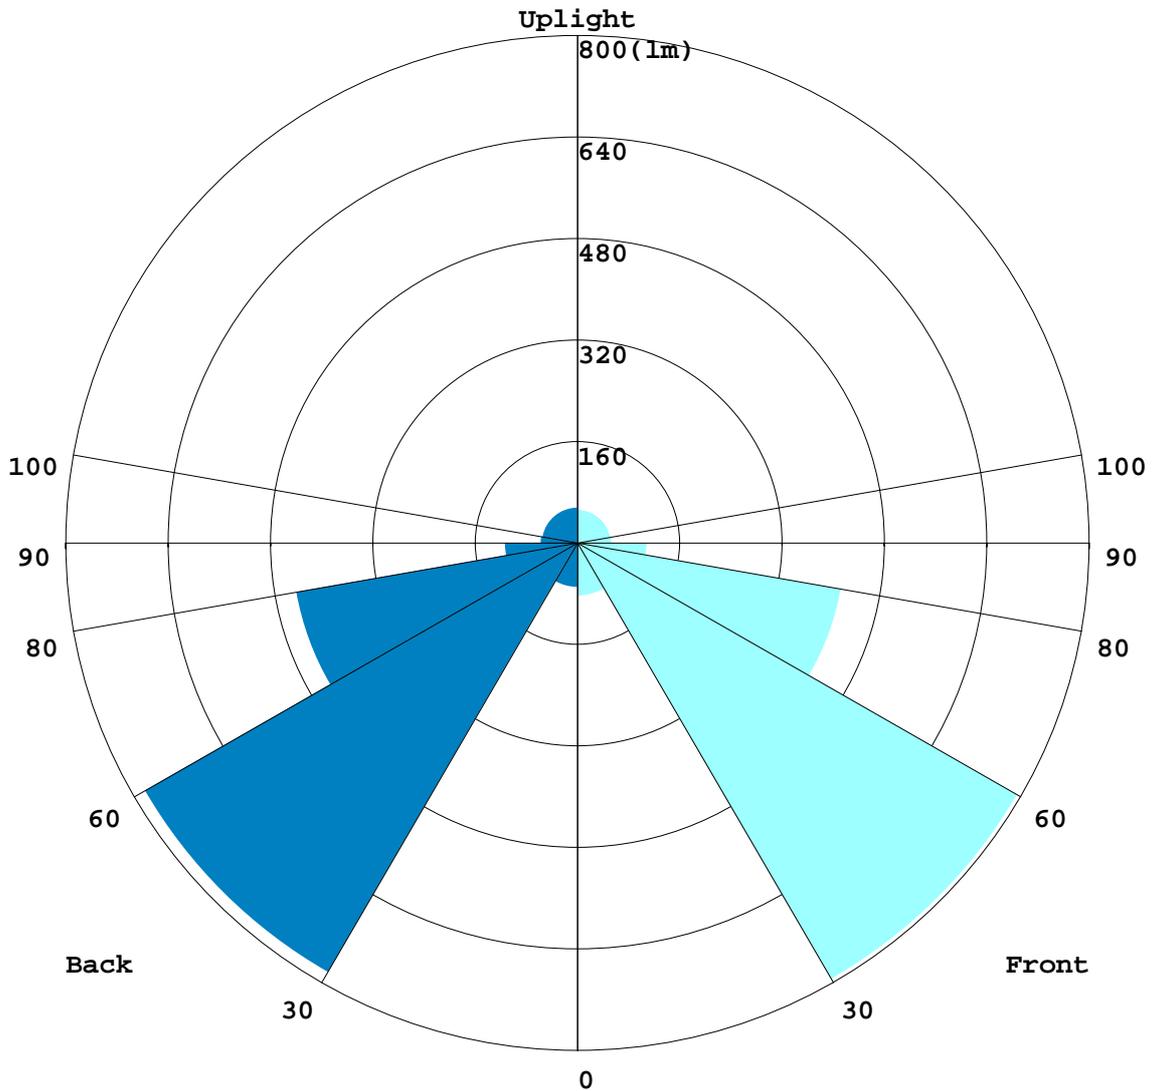

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:



BUG REPORT

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 Lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	82.814	2.7
FM - Front-Medium(30-60)	793.57	26.2
FH - Front-High(60-80)	417.87	13.8
FVH - Front-Very High(80-90)	108.03	3.6
Total Forward Light	1506.7	49.7

BL - Back-Low(0-30)	69.624	2.3
BM - Back-Medium(30-60)	780.74	25.8
BH - Back-High(60-80)	446.45	14.7
BVH - Back-Very High(80-90)	113.07	3.7
Total Back Light	1522.1	50.3

UL - Uplight-Low(90-100)	109.86	3.6
UH - Uplight-High(100-180)	106.85	3.5
Total Up Light	216.72	7.2

BUG(Back,Up,Glare) Rating	B1-U3-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	1409.9	112.26	1522.1
Street Side	1402.3	104.46	1506.7


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:Paul
 Test Date:19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity:65.1%
 Test Distance:1.136m [K=1.0000]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

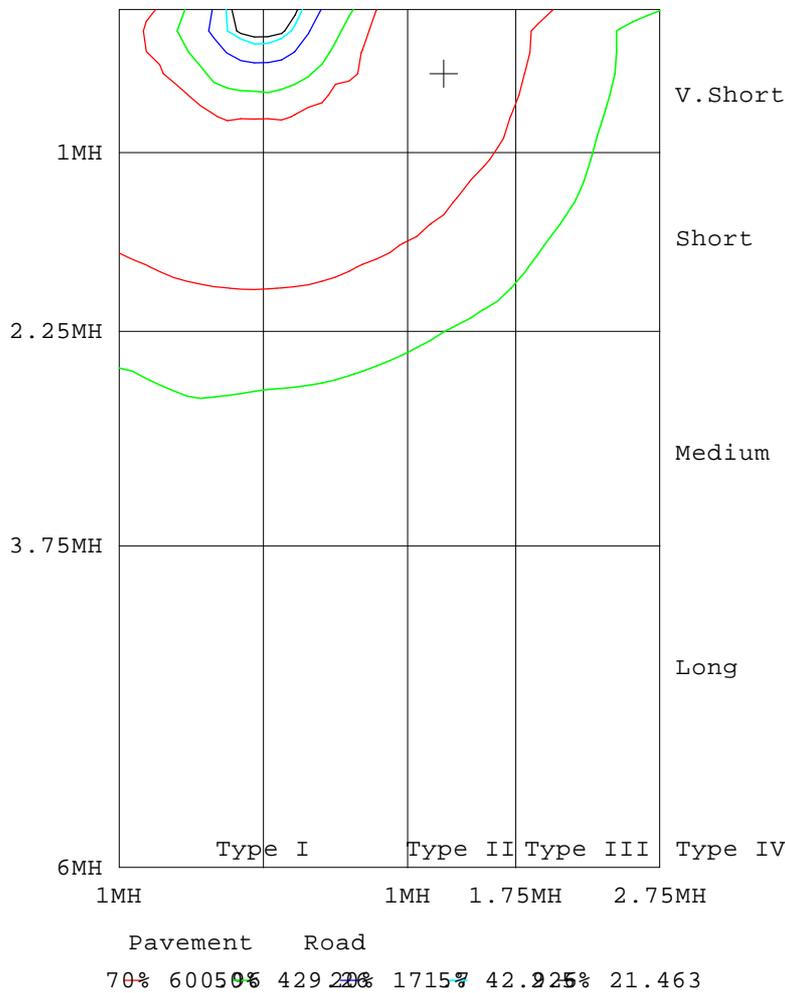

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	
0	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
5	0.12	0.10	0.11	0.10	0.13	0.12	0.15	0.13	0.17	0.17	0.21	0.21	0.27	0.27	0.30	0.28	0.27	0.22	0.14	
10	7.06	6.14	6.44	6.27	6.60	6.04	5.92	5.73	6.67	5.57	6.98	6.43	7.36	7.46	8.38	9.60	8.81	8.29	6.23	
15	41.1	36.4	44.2	42.9	52.1	56.2	57.0	62.7	58.4	62.1	54.9	56.1	51.9	46.5	51.2	46.0	48.3	46.5	37.5	
20	141	136	154	144	165	170	172	185	179	197	174	200	167	159	173	160	165	158	124	
25	275	293	273	308	284	296	309	330	332	341	339	340	306	319	319	307	313	313	255	
30	413	398	389	429	412	409	457	475	473	453	492	446	460	465	480	474	448	461	394	
35	504	514	496	500	518	591	526	557	517	585	569	575	602	533	563	549	599	585	480	
40	574	661	629	595	588	622	612	676	680	706	631	629	675	685	675	687	683	658	554	
45	645	674	657	660	657	672	687	716	730	748	694	706	732	721	711	743	754	761	644	
50	747	730	709	731	722	729	757	771	768	787	743	798	784	806	789	819	823	848	729	
55	765	747	749	752	740	758	753	782	778	798	795	799	814	812	822	835	847	856	743	
60	642	627	612	625	613	625	628	657	642	663	657	666	666	663	682	694	708	729	641	
65	506	499	496	491	501	495	509	519	519	523	523	538	521	540	539	560	548	578	499	
70	387	384	372	372	380	377	387	388	384	385	394	404	391	404	395	419	416	445	373	
75	288	287	280	275	279	283	289	288	293	292	286	290	285	287	278	299	294	320	270	
80	228	233	224	223	221	224	229	230	230	235	237	248	242	246	240	251	254	268	233	
85	198	199	195	191	196	196	203	201	203	207	207	224	205	224	214	235	225	245	204	
90	132	139	138	135	132	132	136	145	142	141	145	152	140	148	157	152	162	170	142	
95	92.3	88.2	84.9	91.5	88.2	93.7	91.7	94.8	88.2	92.6	96.6	103	93.5	97.5	98.1	104	101	119	96.7	
100	49.3	56.8	57.4	52.6	52.1	47.6	50.2	52.8	63.5	30.7	48.8	53.2	55.0	63.0	63.6	64.5	64.2	65.7	58.1	
105	33.9	30.6	33.1	30.8	33.8	34.3	37.3	33.3	33.5	7.45	38.1	38.4	34.9	36.2	35.4	40.6	39.9	42.9	37.6	
110	32.9	32.3	32.6	32.9	34.6	34.0	35.0	36.8	36.6	5.06	37.0	37.8	38.2	38.8	37.8	40.5	38.9	41.0	35.5	
115	34.9	35.5	34.8	33.7	34.9	34.3	36.2	35.5	37.2	6.37	36.1	35.6	37.3	36.4	38.1	40.1	40.7	41.4	32.6	
120	28.4	28.6	28.4	27.3	27.7	28.2	29.0	30.0	28.5	5.79	29.3	31.0	32.0	32.3	32.9	35.1	34.5	36.3	30.0	
125	15.6	15.5	15.8	15.5	15.9	16.1	16.8	17.4	16.4	4.24	16.1	20.2	19.8	20.8	20.7	21.7	22.1	22.8	20.1	
130	7.97	7.75	7.77	7.72	7.92	8.09	8.02	8.46	6.56	3.85	6.03	8.65	9.04	9.08	9.29	9.55	9.95	10.26	8.84	
135	7.40	7.24	7.36	7.38	7.66	7.72	7.37	7.42	5.40	3.98	4.27	7.10	8.00	7.78	8.33	8.07	8.45	8.75	7.38	
140	9.73	9.58	9.52	9.43	9.58	9.70	9.48	9.32	6.72	4.57	4.34	8.36	9.60	9.70	9.85	10.06	10.22	10.66	8.70	
145	10.0	9.87	9.87	9.88	10.0	10.3	10.0	9.53	6.59	4.38	4.37	7.62	9.67	10.7	10.6	11.1	11.4	11.7	9.81	
150	8.02	8.04	7.94	8.08	8.11	8.29	8.06	6.67	4.69	3.59	4.77	5.38	6.59	7.48	8.02	8.95	9.26	9.73	8.47	
155	5.88	5.91	5.80	5.90	5.98	6.19	5.89	4.83	3.60	3.07	3.29	4.37	4.24	4.45	5.00	5.75	6.30	6.87	6.09	
160	4.10	4.09	4.02	4.08	4.14	4.18	3.73	3.10	2.64	2.54	2.30	2.72	3.47	3.86	3.68	3.91	4.05	4.43	3.99	
165	2.78	2.77	2.72	2.69	2.63	2.61	2.26	1.97	1.72	1.67	1.62	1.84	1.91	2.37	2.47	2.64	2.69	2.87	2.62	
170	1.43	1.42	1.35	1.33	1.27	1.22	1.11	1.05	0.98	0.97	0.95	0.99	0.93	0.98	1.06	1.24	1.32	1.40	1.31	
175	0.26	0.25	0.23	0.23	0.22	0.21	0.19	0.17	0.16	0.16	0.14	0.14	0.13	0.15	0.14	0.16	0.18	0.22	0.29	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.11V I:0.2069A P:24.700W PF:0.9939 Freq:60.00Hz Lamp Flux:3028.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

Table--2

UNIT: cd

C (DEG) \ γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02		
5	0.13	0.13	0.14	0.15	0.17	0.18	0.20	0.19	0.19	0.18	0.17	0.16	0.15	0.15	0.17	0.16	0.16		
10	6.71	5.26	5.83	4.21	4.82	3.51	4.22	3.15	3.93	3.21	4.20	3.69	5.92	4.34	5.91	5.29	7.45		
15	37.5	30.0	29.1	27.4	27.3	26.0	26.3	22.5	24.5	21.7	24.7	26.9	31.8	31.0	39.2	37.0	46.2		
20	123	110	110	109	109	111	103	116	124	101	108	115	125	131	141	144	158		
25	263	247	246	246	242	253	256	254	276	259	263	257	286	263	309	300	321		
30	380	362	378	376	387	381	374	387	414	415	408	404	420	410	438	456	490		
35	483	470	472	477	515	487	492	503	533	519	527	538	533	522	541	620	582		
40	575	630	549	571	564	600	594	649	587	592	611	608	677	673	706	640	679		
45	634	659	624	655	642	702	694	729	706	691	715	685	752	732	770	723	780		
50	758	736	745	721	807	766	818	811	846	814	838	855	827	864	835	890	869		
55	757	734	756	750	768	779	828	790	827	804	812	846	828	867	850	874	890		
60	636	642	649	663	670	695	716	722	723	735	737	740	751	752	749	745	769		
65	487	490	498	511	511	541	555	556	571	577	586	580	580	586	584	581	615		
70	373	376	379	400	399	421	428	433	442	442	453	449	450	443	468	452	481		
75	263	271	267	288	288	302	305	314	314	319	326	325	326	320	330	329	351		
80	229	238	236	246	249	259	260	273	268	270	277	269	270	267	278	280	281		
85	202	203	202	202	216	208	224	219	229	227	231	233	237	231	240	237	244		
90	145	141	146	149	148	152	157	156	156	160	161	155	164	164	167	156	171		
95	91.1	97.0	96.8	101	99.1	105	105	107	108	110	112	107	108	108	109	108	115		
100	65.4	62.1	59.4	59.2	66.0	58.0	63.0	66.4	34.9	64.5	62.4	68.3	68.6	69.8	72.0	66.5	65.6		
105	32.8	31.9	37.3	34.1	35.9	39.6	42.2	39.9	13.1	43.2	38.5	42.1	37.3	39.9	39.9	39.6	44.7		
110	33.0	31.1	32.7	32.6	35.6	32.9	36.8	35.6	11.8	37.2	37.6	36.3	38.2	37.7	41.6	40.3	40.8		
115	33.4	32.2	31.2	30.6	31.8	32.0	33.8	33.1	11.1	32.6	34.3	36.5	38.1	38.8	41.7	40.2	43.2		
120	29.9	29.9	28.7	30.1	29.8	30.5	30.1	30.0	10.3	28.1	30.4	31.2	31.9	32.4	33.1	34.1	34.2		
125	19.7	19.9	19.8	19.7	20.0	20.0	20.6	19.3	6.66	19.2	19.7	19.8	19.8	20.2	19.9	20.1	19.9		
130	9.41	9.08	9.48	9.25	9.76	9.81	9.82	8.79	5.79	8.70	9.43	9.80	9.22	9.54	9.15	9.91	9.67		
135	7.51	7.19	7.61	7.24	7.64	7.33	7.17	6.02	6.43	6.40	7.66	8.10	7.86	8.27	8.33	8.68	8.84		
140	8.80	8.61	8.79	8.78	9.10	8.89	8.78	7.23	8.30	7.83	9.93	10.00	10.5	10.4	10.9	11.0	11.5		
145	9.68	9.68	9.59	9.77	10.1	9.95	9.84	8.01	8.25	8.41	10.5	10.9	11.4	11.3	11.8	11.8	12.2		
150	8.39	8.32	8.42	8.67	8.80	8.63	8.33	7.13	6.93	7.37	8.68	9.19	9.35	9.28	9.63	9.67	9.88		
155	6.16	6.22	6.40	6.60	6.72	6.56	5.98	5.57	5.69	5.91	6.26	6.73	6.85	6.93	7.03	7.10	7.25		
160	4.10	4.23	4.36	4.46	4.43	4.21	3.94	3.96	4.10	4.10	4.14	4.46	4.70	4.78	4.88	4.94	5.06		
165	2.74	2.81	2.84	2.87	2.84	2.69	2.64	2.72	2.78	2.76	2.85	3.00	3.13	3.28	3.40	3.40	3.47		
170	1.42	1.53	1.56	1.56	1.51	1.47	1.49	1.52	1.53	1.54	1.61	1.65	1.73	1.80	1.86	1.85	1.83		
175	0.34	0.38	0.40	0.42	0.42	0.43	0.44	0.44	0.44	0.44	0.44	0.45	0.45	0.45	0.45	0.43	0.40		
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

G/C	0.0	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0
0.0	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236
3.0	0.0506	0.0431	0.0436	0.0386	0.0363	0.0310	0.0273	0.0233	0.0230	0.0254
6.0	0.3093	0.2921	0.3940	0.8172	0.5246	0.8875	0.5855	0.8878	0.6198	0.8950
9.0	4.574	3.740	4.657	3.917	4.835	4.022	4.406	3.911	4.591	3.786
12.0	14.49	14.51	13.72	15.26	14.01	14.75	13.43	14.36	12.92	13.74
15.0	41.09	36.42	44.19	42.89	52.14	56.17	57.04	62.69	58.37	62.07
18.0	85.06	85.14	93.66	84.72	89.41	105.4	105.5	126.0	126.9	128.5
21.0	173.0	155.8	167.1	173.9	181.2	220.8	184.9	225.4	201.9	227.4
24.0	240.3	266.7	252.6	253.7	286.8	281.8	274.8	286.2	294.2	300.9
27.0	331.7	333.8	322.9	309.3	349.8	377.0	354.0	372.2	374.8	386.7
30.0	412.7	397.7	389.0	428.6	411.7	409.3	457.2	474.7	472.5	452.8
33.0	474.6	485.3	500.2	453.7	468.0	486.4	480.3	514.6	534.9	551.3
36.0	542.3	540.9	520.3	541.8	526.8	547.1	554.7	557.2	568.3	600.9
39.0	550.7	610.2	635.9	544.5	567.3	579.4	589.7	620.5	693.1	642.6
42.0	666.7	652.7	656.8	665.0	701.0	715.3	721.3	713.9	741.2	729.1
45.0	644.8	673.9	656.8	660.1	657.2	671.8	686.9	716.0	729.5	748.1
48.0	738.1	731.2	736.9	741.6	748.6	760.2	776.7	833.4	821.1	856.3
51.0	712.3	701.3	711.3	719.4	701.4	726.3	736.8	791.4	776.8	767.6
54.0	771.2	748.4	743.3	780.7	737.7	793.6	755.8	817.3	768.9	811.3
57.0	714.3	685.8	690.9	700.8	684.4	719.1	704.3	790.3	745.5	781.9
60.0	642.3	627.2	612.2	625.3	613.0	624.7	628.0	656.8	641.8	662.9
63.0	558.0	556.0	536.6	533.5	540.2	536.0	557.9	569.5	564.5	565.3
66.0	475.7	473.0	463.0	462.2	473.1	472.8	478.7	488.2	478.6	490.9
69.0	410.5	406.6	396.6	393.2	402.5	401.2	407.2	406.7	405.8	405.3
72.0	336.2	334.4	324.9	321.8	326.0	335.1	335.1	342.0	336.8	345.6
75.0	288.2	286.7	279.8	274.7	279.0	283.5	288.9	287.8	293.0	292.2
78.0	280.6	279.5	271.0	270.3	266.4	282.6	274.8	282.8	278.0	293.6
81.0	211.7	214.6	206.5	213.7	210.5	213.0	212.8	220.4	214.3	217.3
84.0	216.8	212.4	215.3	204.8	206.8	213.0	209.8	222.3	212.7	225.0
87.0	176.6	174.7	169.6	170.9	167.6	174.8	172.3	185.9	178.9	184.5
90.0	132.4	138.9	138.4	135.1	131.7	131.6	135.8	144.6	141.5	141.3
93.0	112.1	110.5	107.3	107.2	108.6	103.8	107.4	113.7	115.8	116.4
96.0	78.16	77.21	70.85	74.46	77.75	79.57	80.41	81.93	77.36	79.51
99.0	55.33	60.33	66.73	57.99	58.26	62.31	58.03	60.36	70.34	44.56
102.0	45.61	42.89	39.78	48.53	41.14	41.74	40.84	51.05	44.23	8.287
105.0	33.94	30.63	33.11	30.78	33.82	34.29	37.31	33.34	33.50	7.452
108.0	33.50	32.65	31.03	31.61	32.54	35.24	31.02	31.68	33.26	4.828
111.0	30.75	31.01	30.10	31.16	31.08	30.06	32.95	32.73	34.39	5.400
114.0	33.52	33.02	33.03	31.34	31.88	31.66	32.63	32.55	33.40	6.218
117.0	32.42	31.00	30.41	31.42	31.16	33.84	31.75	36.59	32.77	6.340
120.0	28.38	28.61	28.40	27.34	27.67	28.23	29.04	30.00	28.51	5.788
123.0	21.47	21.16	21.31	21.07	21.43	22.74	22.12	24.61	22.93	4.768
126.0	13.35	13.46	13.38	13.15	13.60	13.91	14.71	14.31	13.80	4.088
129.0	8.901	8.487	8.643	8.570	8.792	9.186	9.275	9.930	8.012	3.943
132.0	7.263	7.502	7.171	7.531	7.527	7.659	7.766	7.507	6.198	3.572
135.0	7.403	7.244	7.357	7.379	7.664	7.721	7.369	7.422	5.402	3.978
138.0	8.609	8.528	8.677	8.484	8.743	8.694	8.400	8.086	5.800	4.205
141.0	10.10	9.930	9.925	9.911	10.16	10.21	10.10	9.833	7.343	4.583
144.0	10.01	9.852	9.792	9.753	10.01	10.14	9.922	9.616	6.898	4.285
147.0	8.899	8.916	8.970	9.321	9.618	10.12	9.995	9.613	6.841	4.278
150.0	8.020	8.040	7.940	8.085	8.113	8.290	8.058	6.666	4.689	3.588
153.0	6.716	6.684	6.564	6.769	6.835	7.265	6.924	5.676	3.890	3.345
156.0	5.413	5.459	5.410	5.524	5.586	5.779	5.371	4.509	3.368	3.125
159.0	4.421	4.402	4.323	4.396	4.433	4.499	4.058	3.325	2.732	2.773
162.0	3.552	3.541	3.472	3.525	3.524	3.512	3.085	2.569	2.241	1.939
165.0	2.779	2.773	2.721	2.694	2.630	2.608	2.262	1.971	1.720	1.667
168.0	1.994	1.992	1.919	1.874	1.810	1.754	1.589	1.463	1.256	1.212
171.0	1.146	1.139	1.081	1.069	1.008	0.9721	0.8787	0.8370	0.7686	0.7672
174.0	0.4388	0.4198	0.3904	0.3872	0.3665	0.3504	0.3106	0.2979	0.2704	0.2690
177.0	0.0341	0.0245	0.0051	0.0006	0.0010	0	0.0005	0.0001	0.0007	0.0002
180.0	0	0	0	0	0	0	0	0	0	0
G/C	100.0	110.0	120.0	130.0	140.0	150.0	160.0	170.0	180.0	190.0
0.0	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236
3.0	0.0291	0.0318	0.0368	0.0394	0.0483	0.0552	0.0690	0.0758	0.0690	0.0791
6.0	0.6490	0.9839	0.7428	1.134	0.7969	1.195	0.7234	1.075	0.7702	0.3480
9.0	4.741	4.125	5.439	4.711	6.146	5.322	6.423	5.099	3.814	4.348
12.0	14.09	15.98	15.55	17.65	18.28	18.20	18.79	18.18	15.30	13.03
15.0	54.89	56.10	51.94	46.50	51.24	45.99	48.30	46.49	37.53	37.45
18.0	116.9	127.4	112.5	108.5	107.0	103.7	104.7	98.96	76.35	78.68
21.0	217.4	204.0	220.4	185.2	199.7	188.2	192.3	190.8	150.5	148.8
24.0	295.2	291.9	290.3	299.8	296.8	279.7	280.8	279.2	226.0	231.0
27.0	375.3	392.5	385.7	365.6	378.8	368.0	381.0	373.1	310.2	307.1
30.0	491.6	446.2	460.4	464.7	480.5	473.5	448.3	461.1	394.2	380.0

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

33.0	508.1	560.6	525.8	520.3	504.6	535.9	529.1	546.5	454.6	450.1
36.0	611.3	583.0	595.1	556.0	575.3	582.0	614.3	602.6	504.8	505.3
39.0	602.6	621.2	625.0	652.9	679.1	658.8	644.0	639.0	545.3	535.5
42.0	725.8	751.7	720.6	751.2	702.9	754.3	766.3	808.0	642.1	642.9
45.0	694.3	705.7	732.5	720.5	710.6	742.9	754.0	760.8	644.5	634.3
48.0	818.7	840.5	826.9	849.9	830.4	869.7	826.7	862.7	711.3	681.7
51.0	790.3	771.2	801.4	795.8	797.7	826.8	805.9	823.9	709.3	688.6
54.0	801.2	817.5	848.6	825.8	853.9	847.9	867.7	886.3	747.0	730.1
57.0	749.6	755.3	774.5	756.6	791.2	780.8	789.6	827.6	686.6	693.0
60.0	656.6	666.5	665.8	663.3	681.6	693.6	708.2	728.9	640.5	636.3
63.0	567.6	578.9	572.8	582.6	585.6	609.7	612.0	640.6	546.3	541.4
66.0	487.2	502.7	489.5	504.8	499.3	524.8	517.1	544.4	463.7	464.5
69.0	411.5	422.3	409.0	428.0	412.4	439.7	437.9	473.8	397.2	394.6
72.0	331.1	354.5	333.1	348.3	337.6	359.2	360.6	388.3	327.0	327.4
75.0	286.0	290.4	285.4	286.5	278.4	299.3	294.0	320.0	270.2	262.6
78.0	283.3	294.6	282.7	292.7	283.6	298.5	298.9	309.9	259.5	259.8
81.0	217.9	227.6	224.8	231.8	223.9	238.1	231.1	250.2	217.1	215.3
84.0	224.9	227.1	237.6	228.0	237.7	235.0	250.0	242.8	204.1	197.9
87.0	178.4	180.0	190.9	187.1	186.4	196.8	199.7	202.9	176.1	169.4
90.0	144.8	151.5	139.5	147.7	156.6	151.5	162.1	169.7	141.9	144.7
93.0	113.2	116.5	117.8	122.8	121.4	126.3	128.9	125.0	112.5	119.2
96.0	85.54	87.86	81.66	81.33	84.43	87.07	88.91	101.9	85.98	78.96
99.0	63.09	61.49	68.63	68.35	70.77	71.30	74.03	72.40	60.38	65.06
102.0	47.83	46.28	45.09	51.18	50.01	53.63	47.43	52.63	44.08	48.63
105.0	38.10	38.44	34.94	36.22	35.44	40.59	39.86	42.92	37.58	32.80
108.0	32.02	33.86	38.68	34.03	34.85	34.96	40.17	38.69	30.96	32.13
111.0	33.15	36.49	34.71	39.48	35.60	39.09	36.89	39.85	35.25	33.41
114.0	32.14	34.51	33.74	35.79	36.56	36.79	37.89	38.24	32.17	31.11
117.0	34.12	37.73	39.37	37.68	38.16	36.70	40.54	38.65	36.58	36.37
120.0	29.25	31.01	32.03	32.27	32.92	35.12	34.50	36.33	30.03	29.86
123.0	22.70	26.91	26.36	27.05	26.68	28.19	28.58	29.78	26.01	25.91
126.0	13.18	16.42	17.19	17.85	17.83	18.42	18.16	19.09	17.48	17.05
129.0	7.529	10.14	10.26	10.20	10.53	10.69	11.03	11.67	10.52	10.39
132.0	4.689	7.655	7.938	8.516	7.901	8.658	8.515	8.807	7.717	7.644
135.0	4.267	7.099	8.002	7.784	8.329	8.068	8.450	8.749	7.379	7.508
138.0	4.220	7.525	8.429	8.735	8.757	9.040	9.216	9.423	8.024	7.871
141.0	4.450	8.476	9.918	10.23	10.20	10.56	10.87	11.26	9.235	9.292
144.0	4.691	8.155	10.18	10.90	10.71	11.28	11.44	11.89	10.03	9.901
147.0	4.883	7.314	9.001	10.07	10.75	10.75	11.30	9.883	9.728	9.728
150.0	4.767	5.383	6.587	7.480	8.022	8.949	9.260	9.726	8.470	8.395
153.0	4.053	4.962	5.159	5.688	6.256	7.032	7.502	7.992	6.991	7.078
156.0	2.946	3.832	4.382	3.539	4.645	5.250	5.711	6.269	5.590	5.670
159.0	2.582	2.952	3.847	4.276	3.783	4.201	4.380	4.800	4.367	4.464
162.0	1.858	2.181	2.714	3.108	3.107	3.317	3.461	3.689	3.393	3.483
165.0	1.624	1.835	1.910	2.375	2.469	2.643	2.689	2.868	2.623	2.742
168.0	1.267	1.360	1.414	1.665	1.844	1.885	2.054	1.877	1.958	1.958
171.0	0.7463	0.7709	0.7355	0.7249	0.7766	0.8893	0.9537	1.015	1.062	1.181
174.0	0.2618	0.2503	0.2405	0.2502	0.2543	0.2847	0.3153	0.3855	0.4589	0.5140
177.0	0.0010	0.0006	0.0015	0.0008	0.0012	0.0052	0.0168	0.0369	0.0764	0.0902
180.0	0	0	0	0	0	0	0	0	0	0
G/C	200.0	210.0	220.0	230.0	240.0	250.0	260.0	270.0	280.0	290.0
0.0	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236
3.0	0.0804	0.0906	0.0909	0.1023	0.0971	0.1065	0.0972	0.1034	0.0876	0.0907
6.0	0.2587	0.2572	0.2223	0.2285	0.2176	0.2389	0.2219	0.2216	0.2057	0.2039
9.0	3.059	3.658	2.405	2.998	1.950	1.954	1.691	1.866	1.758	2.022
12.0	12.90	11.73	11.15	9.990	9.823	8.836	7.767	8.112	7.967	8.590
15.0	29.97	29.08	27.41	27.25	25.96	26.28	22.53	24.47	21.71	24.66
18.0	69.91	69.08	64.92	65.90	69.86	72.05	76.10	82.33	82.65	79.84
21.0	135.1	137.1	130.8	137.3	142.1	149.4	148.2	153.3	131.7	161.7
24.0	221.2	209.7	212.8	206.0	200.1	213.6	200.5	224.7	223.0	238.7
27.0	296.6	299.1	287.9	291.0	286.7	326.0	308.9	312.1	311.0	352.4
30.0	361.6	377.7	376.4	387.4	381.1	373.7	387.0	413.9	415.2	407.8
33.0	461.2	437.3	442.6	423.2	456.1	483.2	476.8	474.6	488.7	474.6
36.0	479.2	509.4	477.0	563.8	511.8	511.6	519.4	555.8	532.3	554.4
39.0	585.0	538.3	577.0	531.4	566.9	585.4	588.7	606.0	591.4	593.3
42.0	609.9	623.0	620.1	662.7	628.5	657.1	660.5	700.7	667.6	674.5
45.0	658.6	623.9	655.3	642.2	701.8	693.8	729.2	706.5	690.8	714.8
48.0	701.5	672.9	708.7	656.0	719.8	723.2	758.4	764.4	738.8	783.1
51.0	719.5	708.4	714.4	734.3	739.9	783.1	759.5	797.2	771.0	801.4
54.0	721.0	752.8	738.9	767.4	783.4	830.3	799.1	806.6	797.1	823.8
57.0	690.6	687.7	695.6	712.8	706.6	757.8	745.6	761.5	771.2	749.4
60.0	642.1	648.8	663.1	669.8	695.0	715.8	721.8	723.2	734.8	737.4
63.0	542.8	554.9	569.4	579.7	590.0	612.4	625.9	636.1	645.4	652.6
66.0	468.0	470.5	490.7	494.4	521.8	537.8	532.1	546.1	558.7	559.3

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

69.0	394.0	392.6	419.3	417.2	441.4	450.3	455.8	463.2	464.7	475.0
72.0	328.8	335.5	353.5	351.4	372.2	377.7	387.6	389.3	395.0	408.3
75.0	271.4	267.2	288.0	288.4	301.9	305.0	314.4	313.9	318.7	326.4
78.0	256.3	258.5	268.7	274.8	281.7	287.8	292.1	299.5	305.8	310.2
81.0	219.4	216.9	224.1	223.3	231.0	240.5	251.2	250.3	251.1	250.8
84.0	197.8	201.0	205.6	206.4	213.3	214.9	217.2	223.4	223.3	238.6
87.0	173.7	176.3	180.1	177.5	186.0	190.4	193.0	194.6	194.8	193.5
90.0	140.9	146.1	149.2	147.8	152.4	157.5	156.4	155.8	160.3	161.3
93.0	115.5	112.8	120.7	125.4	120.3	125.8	132.2	134.1	124.9	124.9
96.0	82.97	86.94	91.01	90.20	98.37	98.43	97.01	95.13	104.9	104.9
99.0	63.32	63.12	65.55	67.99	64.32	67.83	66.47	45.38	71.52	71.14
102.0	52.12	42.66	46.65	42.50	50.10	53.97	62.57	18.66	48.95	51.48
105.0	31.91	37.31	34.14	35.90	39.62	42.22	39.95	13.13	43.19	38.52
108.0	31.68	29.51	34.32	35.93	33.39	31.21	35.00	13.04	34.01	38.65
111.0	33.47	32.46	33.92	33.56	36.55	35.73	35.10	12.41	35.20	36.09
114.0	29.97	29.63	28.75	30.31	29.64	32.21	29.91	11.76	30.56	33.53
117.0	35.31	34.00	35.04	33.96	35.80	37.56	37.25	12.01	36.19	36.88
120.0	29.88	28.68	30.10	29.75	30.47	30.15	30.03	10.31	28.09	30.44
123.0	25.94	25.51	26.21	25.76	26.77	27.35	26.81	7.895	26.03	26.47
126.0	17.15	17.41	17.45	17.48	17.13	16.99	15.96	6.193	15.72	17.20
129.0	10.48	10.32	10.60	10.68	10.60	10.75	9.565	5.905	9.755	10.71
132.0	7.748	7.612	7.684	7.710	7.860	7.665	6.550	5.985	6.840	8.212
135.0	7.190	7.609	7.240	7.640	7.334	7.172	6.021	6.427	6.397	7.660
138.0	7.869	7.806	7.958	7.988	8.087	7.759	6.264	7.381	7.071	8.497
141.0	9.157	9.222	9.315	9.550	9.487	9.426	7.746	8.526	8.402	10.60
144.0	9.765	9.730	9.946	10.18	10.17	9.972	8.536	7.905	8.422	10.39
147.0	9.641	9.706	9.988	10.24	10.25	10.18	8.717	8.079	9.145	10.69
150.0	8.316	8.417	8.674	8.797	8.626	8.334	7.134	6.925	7.370	8.677
153.0	7.055	7.232	7.429	7.552	7.461	7.057	6.337	6.391	6.568	7.329
156.0	5.785	5.946	6.133	6.234	6.083	5.546	5.323	5.368	5.506	5.777
159.0	4.577	4.733	4.823	4.862	4.617	4.271	4.259	4.406	4.400	4.456
162.0	3.614	3.688	3.788	3.740	3.548	3.348	3.428	3.571	3.574	3.637
165.0	2.807	2.838	2.872	2.838	2.690	2.643	2.721	2.779	2.757	2.851
168.0	2.062	2.071	2.082	2.021	1.948	1.921	2.007	2.021	2.037	2.119
171.0	1.276	1.300	1.311	1.273	1.246	1.268	1.280	1.295	1.308	1.357
174.0	0.5708	0.5926	0.6058	0.6096	0.6152	0.6226	0.6221	0.6266	0.6307	0.6364
177.0	0.1118	0.1247	0.1452	0.1421	0.1451	0.1517	0.1633	0.1579	0.1551	0.1486
180.0	0	0	0	0	0	0	0	0	0	0
G/C	300.0	310.0	320.0	330.0	340.0	350.0				
0.0	0.0236	0.0236	0.0236	0.0236	0.0236	0.0236				
3.0	0.0762	0.0790	0.0651	0.0706	0.0564	0.0588				
6.0	0.1837	0.1877	0.2126	0.2307	0.2552	0.3045				
9.0	1.976	3.513	2.408	3.667	2.969	4.670				
12.0	9.937	10.73	12.47	12.48	14.23	15.28				
15.0	26.86	31.82	31.01	39.24	37.01	46.18				
18.0	77.40	84.71	76.79	85.48	87.95	89.60				
21.0	145.1	165.9	161.1	171.3	175.7	191.8				
24.0	220.8	255.5	236.2	273.7	251.7	302.9				
27.0	308.3	322.7	345.7	351.8	365.1	369.6				
30.0	404.2	419.6	410.1	438.0	456.2	490.2				
33.0	468.1	514.3	506.0	562.0	492.3	548.3				
36.0	579.1	522.7	565.4	572.5	632.8	607.3				
39.0	587.6	646.6	646.9	683.5	614.0	689.1				
42.0	717.3	691.1	685.2	741.5	794.7	786.5				
45.0	685.4	752.3	732.2	770.1	723.3	780.2				
48.0	769.8	795.9	758.2	859.5	775.4	870.9				
51.0	821.7	812.4	804.0	837.6	831.3	861.6				
54.0	817.6	848.3	861.9	863.7	878.0	885.0				
57.0	787.8	781.5	794.8	811.7	806.1	841.7				
60.0	740.2	750.5	752.1	749.5	744.6	769.3				
63.0	644.4	642.8	637.7	647.3	648.0	673.0				
66.0	556.0	556.9	557.9	558.0	556.0	587.0				
69.0	469.1	477.2	465.7	489.3	476.8	505.7				
72.0	399.9	400.0	394.2	411.8	403.1	424.3				
75.0	324.8	325.5	320.0	330.0	329.0	350.6				
78.0	309.7	306.3	313.0	329.5	333.0	338.7				
81.0	249.6	246.0	245.8	250.7	254.0	256.9				
84.0	245.2	240.3	254.7	255.8	264.6	258.9				
87.0	201.4	200.9	201.8	202.7	217.0	211.8				
90.0	155.0	164.1	164.1	167.0	156.0	171.2				
93.0	140.8	133.4	129.7	132.7	132.6	134.2				
96.0	98.32	95.58	103.4	97.27	100.3	101.9				
99.0	79.18	71.16	68.99	72.30	78.00	69.96				
102.0	49.26	57.27	52.75	55.13	49.34	51.42				

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

105.0	42.14	37.26	39.89	39.93	39.60	44.71
108.0	37.82	34.78	34.06	35.77	39.34	38.11
111.0	35.46	37.32	34.02	39.16	34.63	37.46
114.0	32.46	35.42	36.04	37.91	37.65	39.22
117.0	36.84	35.80	37.83	36.52	39.40	37.61
120.0	31.19	31.85	32.45	33.12	34.09	34.17
123.0	27.54	25.90	26.35	25.68	26.88	27.29
126.0	16.69	17.26	17.15	17.44	16.87	17.49
129.0	11.05	10.83	10.86	10.81	11.19	10.81
132.0	8.167	8.544	8.068	8.777	8.424	9.337
135.0	8.104	7.864	8.269	8.325	8.676	8.836
138.0	8.823	9.301	9.427	9.951	9.968	10.42
141.0	10.74	11.09	10.91	11.55	11.57	12.24
144.0	10.70	11.16	11.26	11.75	11.74	12.04
147.0	10.64	10.81	10.72	10.78	10.84	11.02
150.0	9.189	9.352	9.282	9.626	9.673	9.879
153.0	7.826	7.915	7.934	8.017	8.021	8.251
156.0	6.269	6.358	6.492	6.590	6.594	6.705
159.0	4.793	5.032	5.133	5.245	5.292	5.445
162.0	3.858	4.028	4.150	4.268	4.325	4.364
165.0	3.003	3.133	3.283	3.404	3.404	3.471
168.0	2.179	2.294	2.425	2.505	2.513	2.509
171.0	1.402	1.448	1.495	1.527	1.526	1.502
174.0	0.6603	0.6617	0.6657	0.6641	0.6553	0.6262
177.0	0.1492	0.1451	0.1454	0.1237	0.1087	0.0882
180.0	0	0	0	0	0	0

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks: