
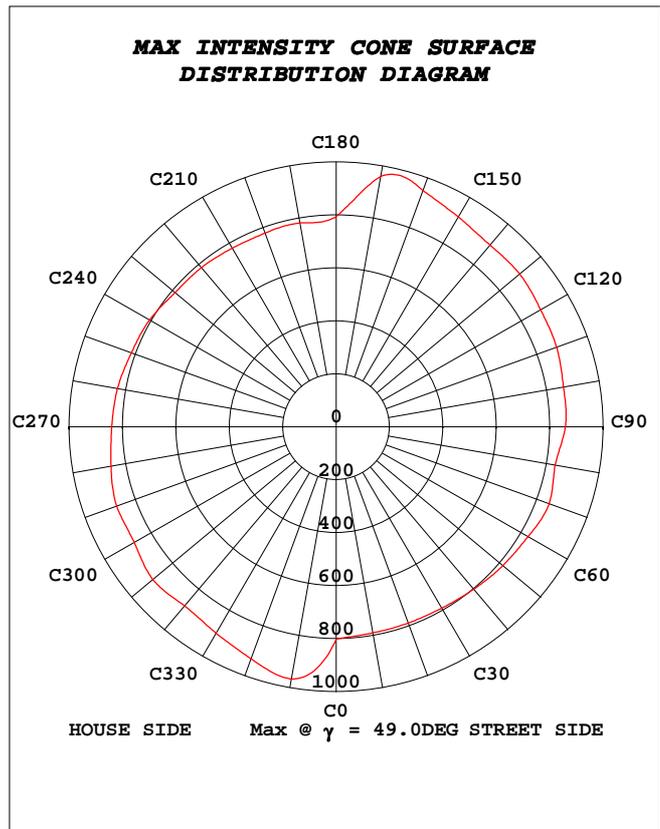


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.53 lm/W			
MODEL		Imax(cd)	966.6	η street_up(%)	3.5
NOMINAL POWER(W)		LOR(%)	100.0	η street_down(%)	46.2
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3224	η house_up(%)	3.7
NOMINAL FLUX(lm)	3224.22	MAXIMUM @(C, γ)	350,49.0	η house_down(%)	46.6
LAMPS INSIDE	1	η up(%)	7.2	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	120	η down(%)	92.8	SLI	20.625

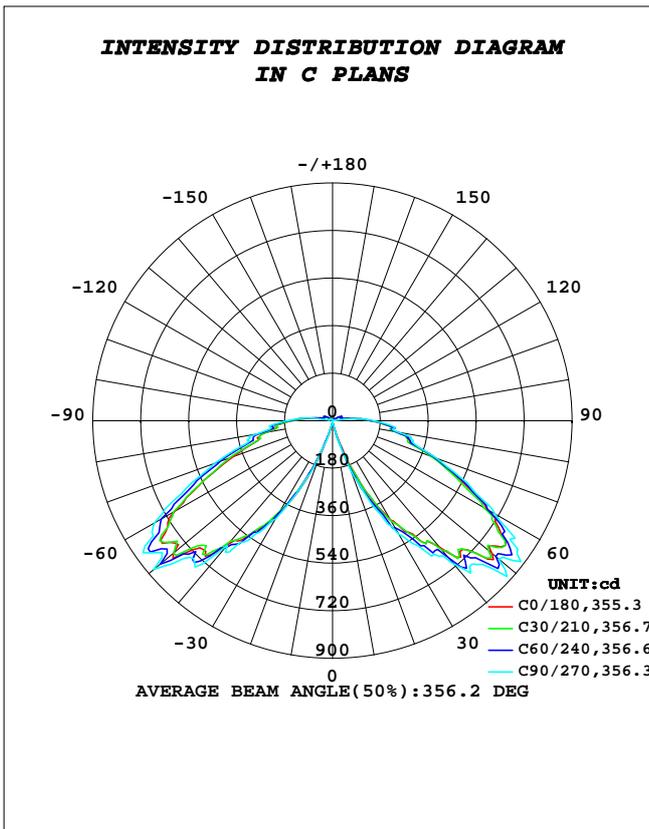


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:Paul
 Test Date:19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity:65.1%
 Test Distance:1.136m [K=1.0000]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

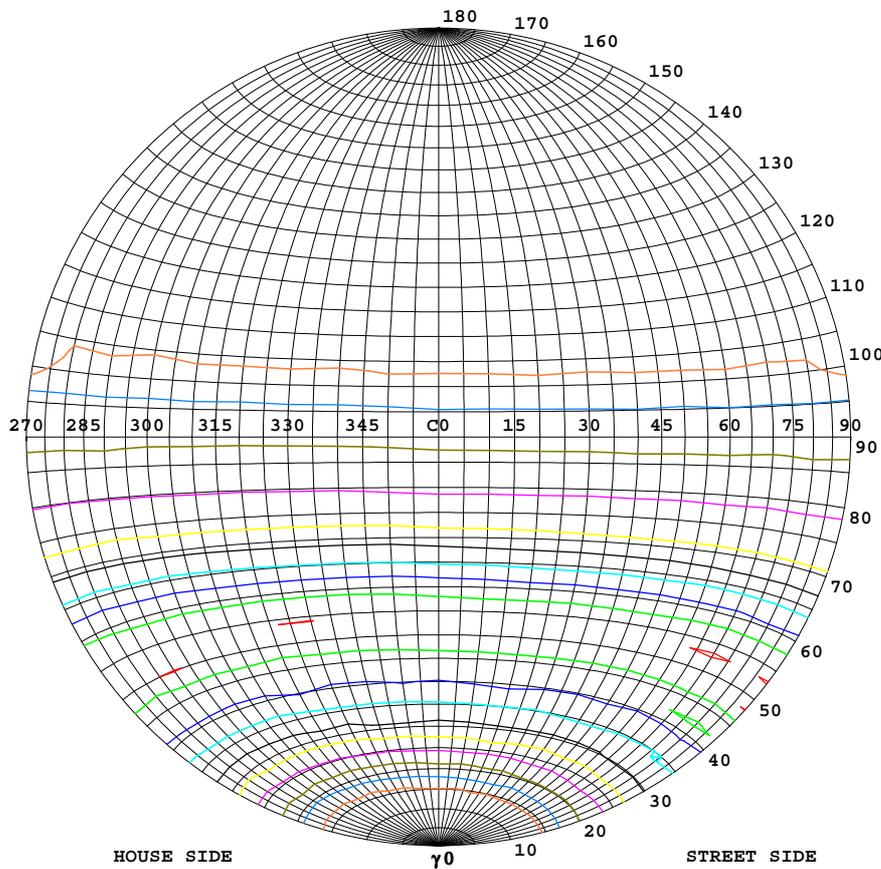

Classification:



IES:Type V - Short
 CIE:Average - Short
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:93.20cd/klm
 Max.At90:56.25cd/klm
 Max.80-90:93.20cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
I _{max} =100%	967
90%	870
80%	773
70%	677
60%	580
50%	483
40%	387
30%	290
20%	193
10%	97
5%	48

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:Paul
Test Date:19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity:65.1%
Test Distance:1.136m [K=1.0000]
Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

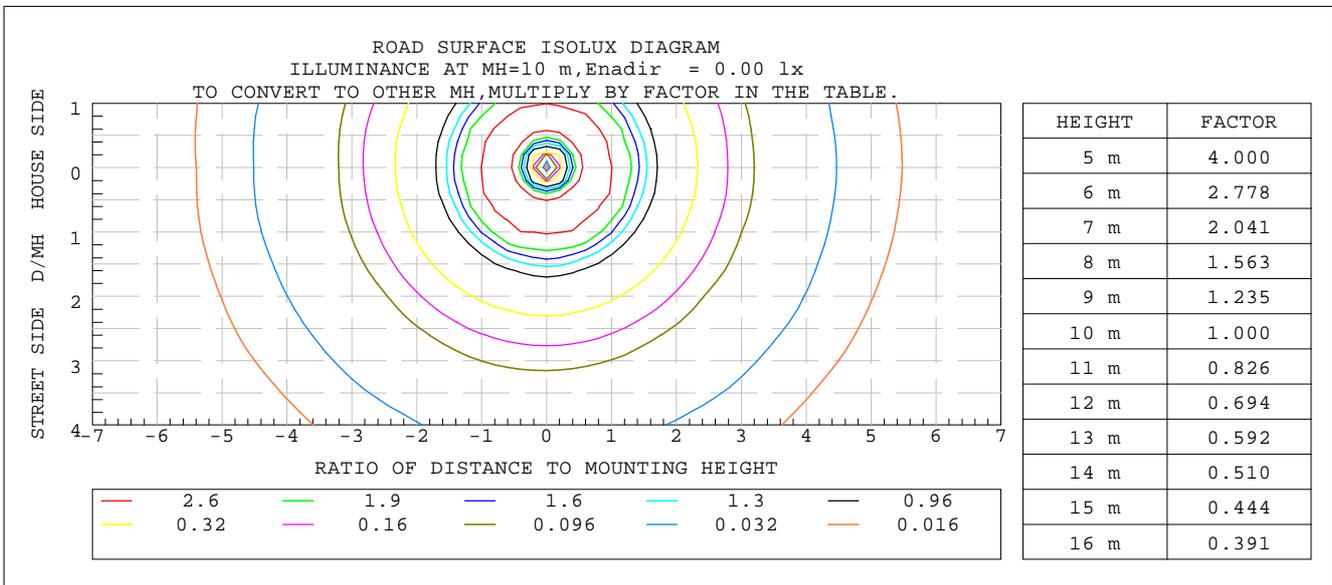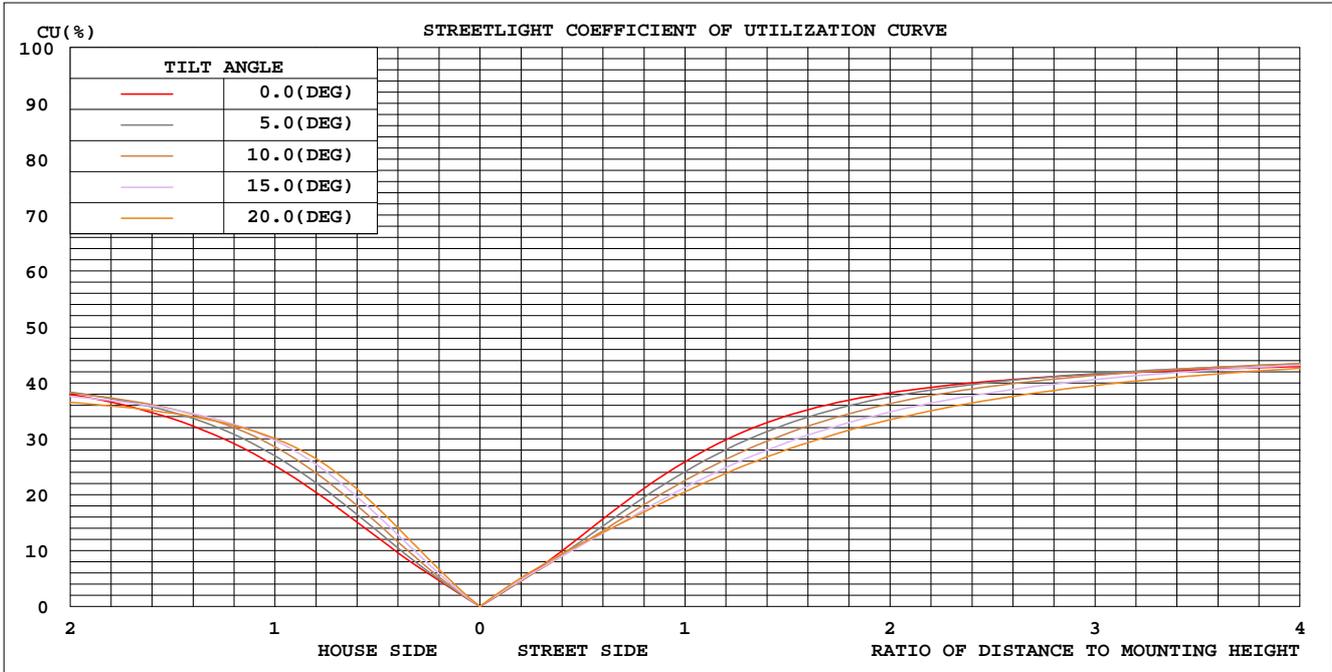

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:



ZONAL FLUX DIAGRAM

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	6.610	6.640	5.922	8.392	6.627	4.888	4.151	4.956	0- 10	0.1855	0.1855	0.01,0.01
20	151.4	176.5	198.6	175.2	135.6	115.8	120.7	131.7	10- 20	17.63	17.81	0.55,0.55
30	432.5	441.2	495.6	490.5	409.1	394.8	431.3	452.2	20- 30	143.5	161.3	5,5
40	625.3	647.1	708.5	708.7	613.2	621.9	615.7	696.6	30- 40	355.4	516.7	16,16
50	780.9	769.1	814.7	853.8	779.5	811.7	877.6	889.8	40- 50	592.9	1110	34.4,34.4
60	671.9	654.9	702.3	718.5	680.8	713.3	771.9	790.9	50- 60	725.6	1835	56.9,56.9
70	413.4	395.7	415.0	430.2	396.8	428.9	471.3	476.0	60- 70	566.4	2402	74.5,74.5
80	239.9	234.9	250.8	260.8	248.5	265.2	283.6	287.6	70- 80	355.5	2757	85.5,85.5
90	146.3	143.8	151.3	162.7	150.8	157.3	168.4	173.6	80- 90	235.7	2993	92.8,92.8
100	57.04	54.77	27.67	63.60	64.61	65.85	32.19	72.70	90-100	117.5	3110	96.5,96.5
110	34.60	36.17	5.779	40.87	37.23	35.45	12.90	40.89	100-110	44.97	3155	97.9,97.9
120	30.18	29.60	6.207	34.93	31.85	31.58	10.87	34.16	110-120	34.14	3189	98.9,98.9
130	8.349	8.487	4.000	9.909	9.583	10.25	6.208	10.05	120-130	18.19	3208	99.5,99.5
140	10.27	10.22	4.768	10.52	9.298	9.470	8.834	11.15	130-140	6.492	3214	99.7,99.7
150	8.445	8.665	3.871	8.288	8.988	9.243	7.483	10.02	140-150	6.312	3220	99.9,99.9
160	4.344	4.372	2.676	3.993	4.258	4.751	4.360	5.100	150-160	2.969	3223	100,100
170	1.510	1.324	1.017	1.103	1.405	1.654	1.621	1.889	160-170	0.8433	3224	100,100
180	0	0	0	0	0	0	0	0	170-180	0.0684	3224	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:Paul
 Test Date:19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity:65.1%
 Test Distance:1.136m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

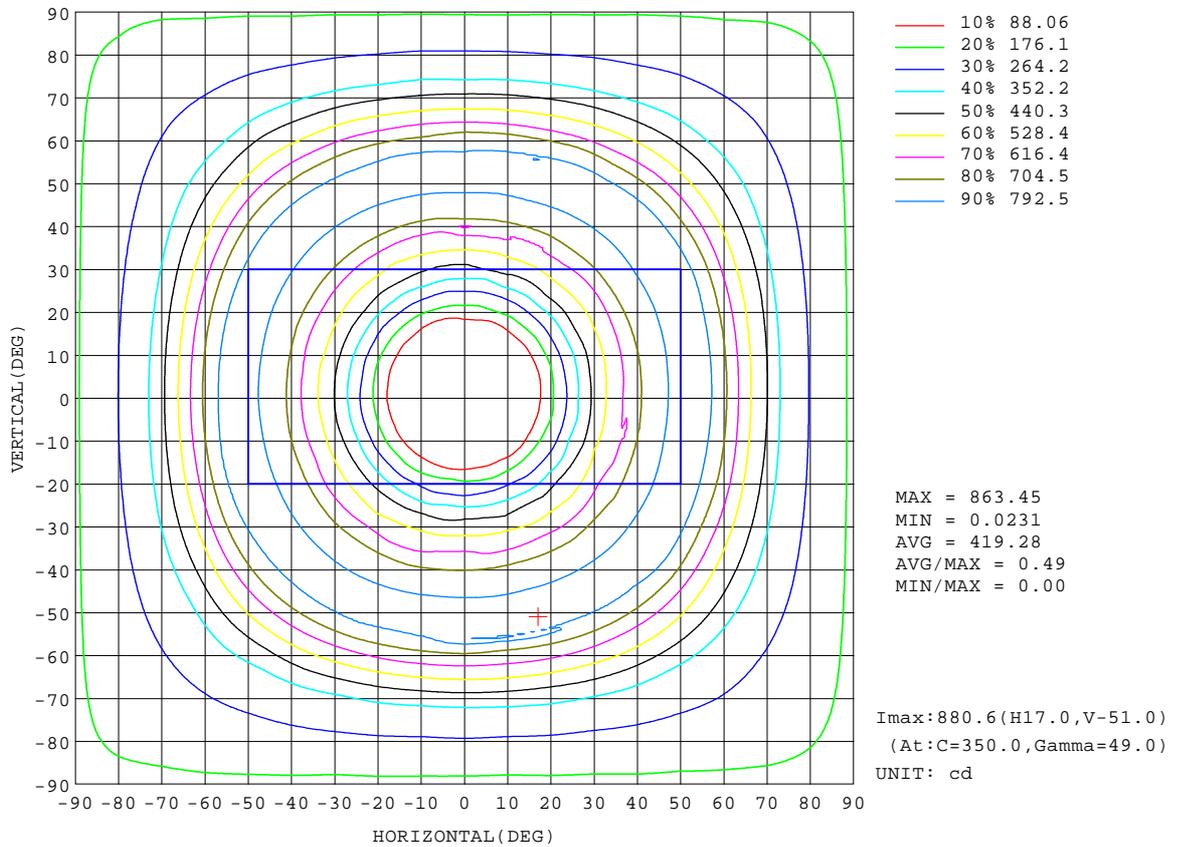

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:Paul
Test Date:19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity:65.1%
Test Distance:1.136m [K=1.0000]
Remarks:

Planar Illuminance Curve

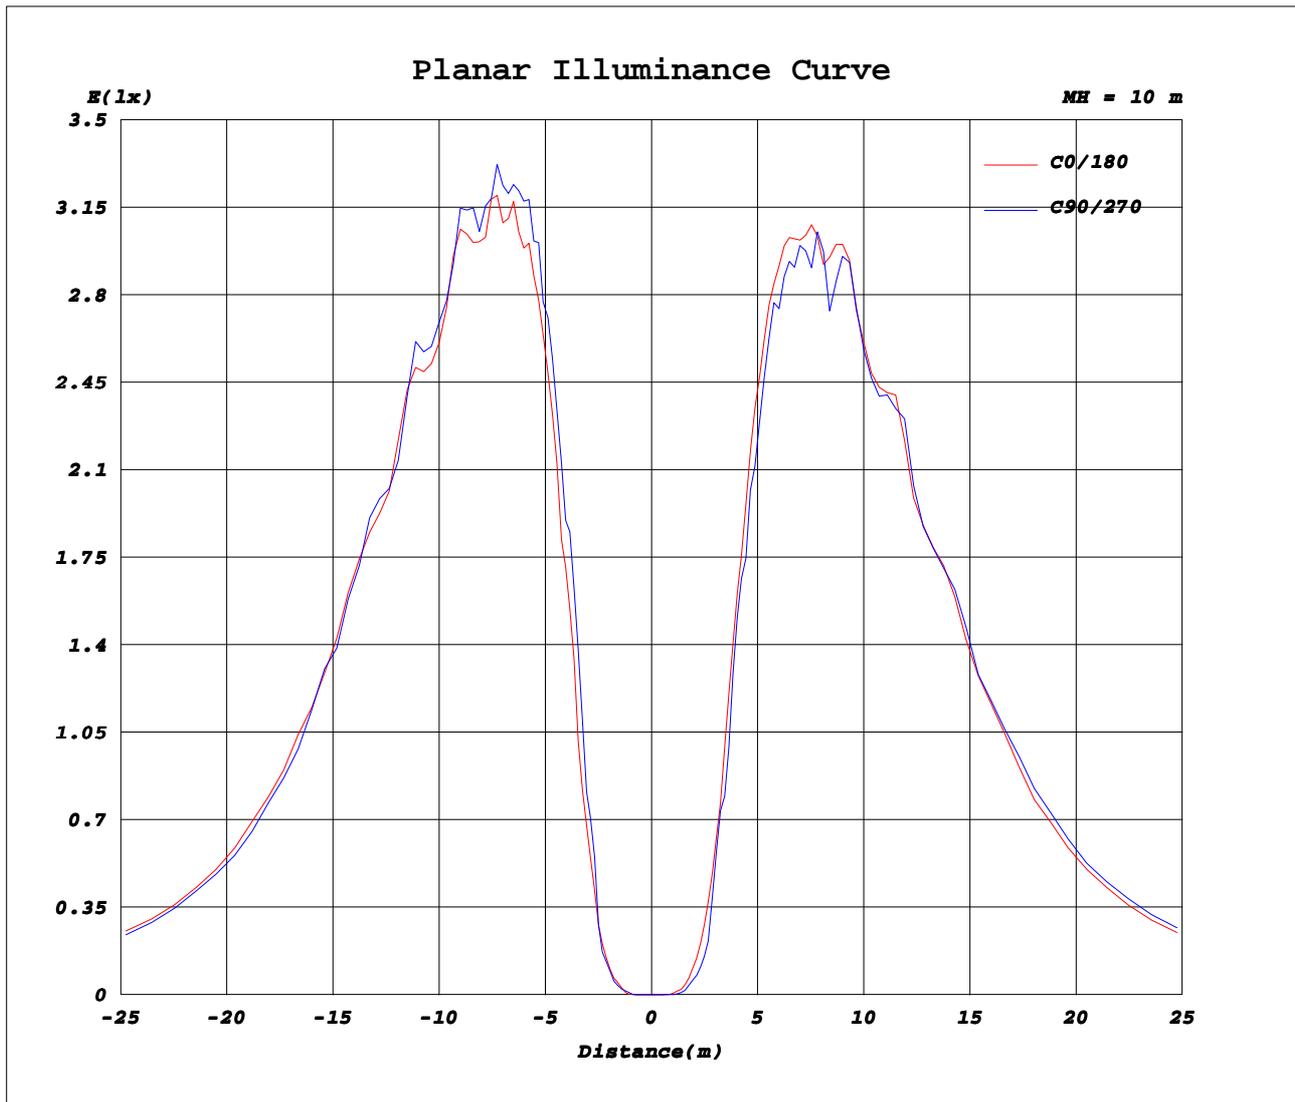


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:

LCS REPORT

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

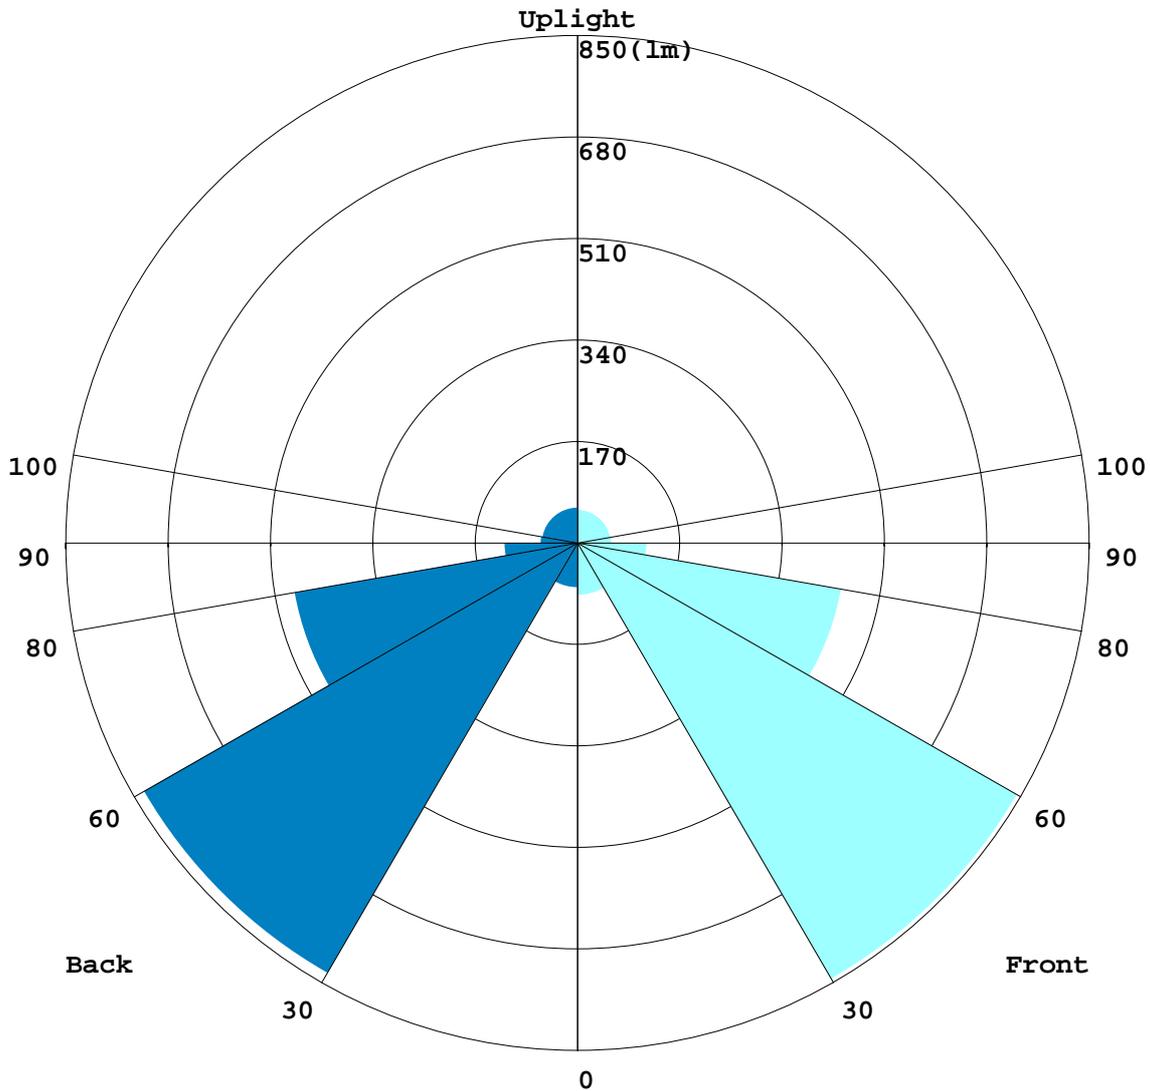

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:



BUG REPORT

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	87.274	2.7
FM - Front-Medium(30-60)	842.81	26.1
FH - Front-High(60-80)	445.01	13.8
FVH - Front-Very High(80-90)	115	3.6
Total Forward Light	1601.6	49.7

BL - Back-Low(0-30)	74.045	2.3
BM - Back-Medium(30-60)	831.09	25.8
BH - Back-High(60-80)	476.81	14.8
BVH - Back-Very High(80-90)	120.69	3.7
Total Back Light	1622.6	50.3

UL - Uplight-Low(90-100)	117.51	3.6
UH - Uplight-High(100-180)	113.98	3.5
Total Up Light	231.49	7.2

BUG(Back,Up,Glare) Rating	B1-U3-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	1502.6	119.96	1622.6
Street Side	1490.1	111.53	1601.6


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:Paul
 Test Date:19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity:65.1%
 Test Distance:1.136m [K=1.0000]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

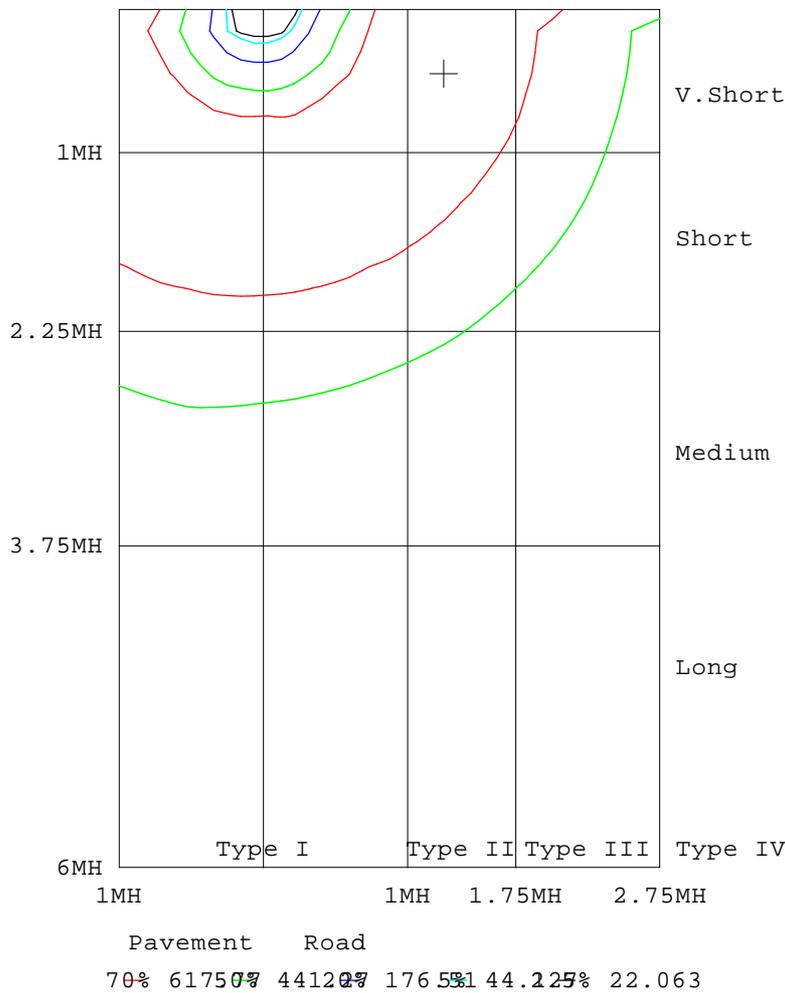

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
5	0.13	0.12	0.12	0.12	0.15	0.14	0.16	0.14	0.18	0.18	0.24	0.24	0.29	0.27	0.30	0.27	0.29	0.24	0.16
10	6.61	6.61	7.08	6.70	7.04	6.23	6.29	6.02	6.12	5.92	6.42	6.71	7.88	7.96	8.83	10.15	9.48	10.07	6.63
15	43.2	40.2	50.2	46.8	55.2	57.0	59.9	64.1	61.2	61.9	57.3	59.0	57.5	48.5	53.8	49.2	55.1	48.8	38.7
20	151	147	160	166	176	177	185	185	191	199	193	194	183	173	177	170	172	171	136
25	291	297	293	303	315	317	325	323	340	346	355	347	332	332	328	325	339	333	273
30	432	429	418	437	433	450	468	492	488	496	498	481	494	482	499	493	497	493	409
35	525	535	538	532	562	562	579	575	581	596	599	602	605	605	600	609	620	624	513
40	625	651	630	641	647	647	675	700	703	708	714	702	714	707	710	718	742	753	613
45	690	709	691	686	709	700	736	744	758	770	759	757	774	764	775	785	813	831	690
50	781	769	749	765	766	772	800	803	799	815	828	835	854	857	850	876	899	926	780
55	796	794	789	790	789	793	803	821	823	849	848	854	870	871	864	890	917	927	789
60	672	669	650	652	653	657	671	681	690	702	706	702	714	715	721	745	774	797	681
65	531	528	519	515	528	529	542	546	554	557	562	564	569	574	577	596	608	630	531
70	413	406	396	393	395	396	404	407	409	415	420	422	425	431	430	444	456	475	397
75	300	301	296	292	298	298	305	304	309	311	306	308	307	308	306	321	324	347	290
80	240	243	236	238	234	236	241	244	243	251	254	258	263	262	260	270	278	289	248
85	208	213	207	205	207	209	212	215	215	220	223	229	228	237	235	247	248	259	217
90	146	146	149	140	146	142	147	148	153	151	158	155	160	160	166	164	174	176	151
95	95.1	97.5	95.9	95.6	92.3	101	94.3	98.4	97.9	101	99.6	102	103	106	107	111	114	121	103
100	57.0	58.8	56.7	54.0	55.0	54.6	55.8	56.7	59.2	27.7	57.9	63.4	59.1	62.1	65.1	66.9	72.5	77.5	64.6
105	34.7	34.6	36.5	35.4	35.9	36.7	37.2	36.8	38.8	7.00	38.7	38.8	38.7	41.3	40.5	42.7	43.4	44.2	38.7
110	34.6	35.0	34.4	35.2	35.7	36.7	38.1	39.1	39.2	5.78	39.8	40.2	41.0	40.8	40.9	43.3	43.4	43.9	37.2
115	37.6	34.2	36.9	33.4	37.0	36.9	38.4	37.8	38.5	7.04	38.6	38.6	39.8	39.9	41.1	42.0	44.3	44.2	35.0
120	30.2	30.4	29.7	29.4	29.5	29.7	30.9	31.3	30.6	6.21	30.7	32.9	33.8	34.7	35.2	36.3	37.8	38.7	31.9
125	16.7	16.6	16.0	16.6	16.4	16.9	17.7	18.2	17.4	4.55	17.5	20.6	21.1	22.0	22.1	23.2	23.8	24.6	21.5
130	8.35	8.37	8.19	8.31	8.43	8.54	8.70	8.73	7.19	4.00	6.42	9.07	9.64	9.90	9.92	10.36	10.76	11.00	9.58
135	7.76	7.78	7.85	7.91	8.11	8.11	8.06	7.75	5.88	4.16	4.60	7.56	8.51	8.64	8.78	8.86	9.19	9.34	7.94
140	10.3	10.2	10.2	10.0	10.2	10.2	10.2	9.72	7.20	4.77	4.65	8.76	10.24	10.5	10.6	10.7	11.1	11.3	9.30
145	10.5	10.5	10.5	10.5	10.7	10.8	10.8	9.93	6.92	4.70	4.74	7.93	10.25	11.2	11.4	11.9	12.3	12.6	10.5
150	8.44	8.49	8.51	8.55	8.64	8.69	8.62	7.01	5.00	3.87	5.02	5.66	7.03	7.95	8.63	9.50	10.01	10.40	8.99
155	6.19	6.27	6.22	6.28	6.39	6.47	6.27	5.07	3.83	3.22	3.58	4.57	4.49	4.82	5.43	6.18	6.82	7.36	6.52
160	4.34	4.36	4.31	4.35	4.40	4.35	3.97	3.27	2.80	2.68	2.49	2.84	3.73	4.13	3.86	4.19	4.40	4.72	4.26
165	2.96	2.95	2.88	2.85	2.82	2.72	2.43	2.09	1.83	1.74	1.74	1.92	2.29	2.53	2.66	2.84	2.89	3.08	2.79
170	1.51	1.50	1.44	1.41	1.36	1.29	1.19	1.11	1.04	1.02	1.02	1.04	1.01	1.05	1.15	1.33	1.43	1.53	1.41
175	0.28	0.26	0.25	0.24	0.23	0.23	0.20	0.18	0.17	0.16	0.15	0.15	0.14	0.16	0.15	0.17	0.20	0.25	0.31
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.12V I:0.1995A P:23.790W PF:0.9927 Freq:60.00Hz Lamp Flux:3224.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ETA	SUR.:D=0.15m,H=0.11m	Shielding Angle:

Table--2

UNIT: cd

C (DEG) \ γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03		
5	0.14	0.14	0.15	0.17	0.19	0.21	0.21	0.21	0.21	0.19	0.18	0.17	0.17	0.16	0.17	0.17	0.17		
10	7.62	5.64	6.17	4.61	5.17	3.83	4.55	3.46	4.15	3.39	4.41	3.89	5.30	4.61	6.37	5.91	7.88		
15	40.0	32.2	34.5	28.8	28.7	28.0	27.8	24.2	24.3	22.9	25.8	28.3	36.7	33.7	41.1	39.9	49.8		
20	130	122	118	117	115	116	108	121	121	129	113	129	127	136	144	156	168		
25	273	261	260	254	264	264	271	262	274	270	277	281	293	295	321	326	349		
30	407	399	396	399	391	404	403	435	431	445	453	421	458	447	477	484	507		
35	507	512	508	512	524	514	532	538	552	558	558	569	571	570	584	627	636		
40	604	618	593	606	638	630	634	649	616	652	669	658	677	716	701	726	763		
45	680	681	671	706	708	744	730	744	739	759	759	756	771	776	789	806	831		
50	789	787	780	800	823	844	842	866	878	889	900	892	889	891	915	935	965		
55	799	790	792	808	817	846	857	853	870	868	867	897	899	897	922	940	961		
60	690	688	692	708	719	742	759	762	772	780	778	795	795	787	799	808	823		
65	532	530	531	549	553	576	587	595	606	614	613	621	617	614	624	640	651		
70	400	406	409	428	430	450	453	464	471	475	477	481	476	476	486	497	509		
75	290	296	293	306	308	325	328	342	335	349	343	347	342	344	343	356	362		
80	248	256	253	266	265	279	280	290	284	292	289	291	287	288	291	300	298		
85	215	218	216	221	223	231	234	238	240	245	244	250	250	249	248	258	259		
90	153	153	154	156	158	162	166	168	168	171	174	173	177	170	176	175	181		
95	101	104	103	109	107	113	111	115	115	116	114	117	116	116	116	121	120		
100	66.4	65.4	65.7	64.9	66.8	66.2	67.9	69.3	32.2	71.7	70.1	71.7	71.0	74.4	72.3	73.8	77.9		
105	37.3	36.1	38.2	37.1	38.8	43.2	42.3	40.8	14.3	43.0	40.2	44.7	42.3	41.1	43.9	43.3	44.4		
110	35.1	34.4	35.4	34.9	36.0	35.0	39.0	38.7	12.9	39.8	39.8	41.9	41.5	40.3	42.8	43.7	43.5		
115	34.8	33.9	33.0	33.0	33.8	34.4	35.7	35.0	12.1	35.4	37.3	38.5	40.3	40.8	42.7	44.0	45.7		
120	31.9	31.5	31.0	31.4	31.7	31.9	32.0	31.1	10.9	30.8	31.9	33.2	33.9	34.4	35.5	36.7	37.1		
125	21.3	21.7	21.1	21.5	21.3	21.6	21.6	20.7	7.14	20.5	20.6	20.9	20.8	21.4	21.2	21.8	21.4		
130	9.84	10.1	9.92	10.3	10.2	10.7	10.3	9.59	6.21	9.31	10.07	10.34	10.07	10.04	9.96	10.50	10.62		
135	7.94	7.97	7.92	7.93	7.96	8.03	7.57	6.53	6.91	6.86	8.19	8.53	8.68	8.70	9.01	9.24	9.55		
140	9.46	9.38	9.40	9.37	9.57	9.57	9.31	7.79	8.83	8.44	10.4	10.7	11.1	11.2	11.6	11.8	12.3		
145	10.4	10.4	10.3	10.5	10.7	10.7	10.4	8.65	8.72	9.09	11.0	11.7	12.1	12.2	12.4	12.7	13.1		
150	9.00	9.00	8.98	9.25	9.24	9.31	8.79	7.60	7.48	7.78	9.06	9.75	9.97	10.07	10.18	10.46	10.57		
155	6.63	6.76	6.82	7.06	7.04	7.03	6.34	6.04	6.03	6.19	6.57	7.15	7.38	7.44	7.48	7.69	7.74		
160	4.42	4.56	4.66	4.81	4.69	4.53	4.18	4.29	4.36	4.38	4.35	4.74	5.05	5.15	5.21	5.35	5.39		
165	2.94	3.02	3.06	3.10	2.99	2.90	2.81	2.90	2.93	3.00	3.01	3.19	3.35	3.51	3.60	3.69	3.73		
170	1.52	1.64	1.67	1.69	1.62	1.61	1.59	1.62	1.62	1.67	1.69	1.77	1.85	1.92	1.98	2.01	1.99		
175	0.36	0.41	0.44	0.45	0.45	0.47	0.46	0.47	0.47	0.48	0.47	0.48	0.47	0.48	0.48	0.47	0.44		
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

G/C	0.0	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0
0.0	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252
3.0	0.0535	0.0467	0.0479	0.0416	0.0395	0.0333	0.0297	0.0247	0.0246	0.0271
6.0	0.3266	0.7951	0.4340	0.8838	0.5656	0.9293	0.6198	0.9254	0.6514	0.9350
9.0	4.710	4.051	5.113	4.288	5.166	4.195	4.679	4.064	4.568	3.950
12.0	14.95	14.84	15.40	15.94	14.92	15.41	14.24	15.02	13.64	14.37
15.0	43.18	40.19	50.24	46.80	55.17	57.04	59.92	64.05	61.23	61.91
18.0	89.21	92.82	96.66	108.2	95.84	112.6	107.1	121.7	122.8	129.6
21.0	177.1	173.3	182.7	180.9	193.7	202.8	210.9	213.0	225.3	230.2
24.0	260.2	267.8	265.9	268.7	292.8	289.3	297.9	296.3	310.7	309.9
27.0	348.6	342.3	365.8	347.0	349.0	376.7	378.1	402.0	397.2	396.4
30.0	432.5	429.4	418.0	437.4	432.8	449.6	467.7	491.6	488.3	495.6
33.0	502.5	501.4	499.3	492.5	492.0	508.8	516.0	543.9	562.6	556.0
36.0	564.3	571.6	565.2	564.8	560.3	561.8	585.3	591.5	605.8	634.6
39.0	599.7	610.9	627.7	595.7	609.3	641.8	626.7	654.5	684.0	658.1
42.0	697.1	700.8	717.1	703.5	723.4	728.8	751.3	765.5	791.1	775.7
45.0	689.5	709.0	691.2	686.0	708.9	700.4	736.0	743.8	757.8	770.2
48.0	782.7	771.1	774.7	778.0	801.1	818.1	836.2	855.3	864.4	882.5
51.0	755.5	747.2	745.2	749.6	758.8	771.4	799.7	815.9	813.1	822.5
54.0	802.0	796.1	792.5	802.3	803.0	817.9	824.9	836.1	831.1	855.9
57.0	744.3	734.4	732.4	731.8	737.9	745.8	770.8	800.3	803.4	817.1
60.0	671.9	668.6	650.4	652.3	653.1	656.7	671.1	681.2	689.8	702.3
63.0	586.8	583.7	566.3	563.9	571.4	571.4	591.1	597.4	600.1	604.3
66.0	500.4	498.0	487.0	488.4	497.8	501.7	508.9	512.3	515.9	521.1
69.0	435.3	428.0	419.6	416.7	418.7	421.0	429.9	429.2	434.1	438.8
72.0	358.0	356.1	348.8	342.6	340.8	347.4	354.2	358.9	359.8	359.8
75.0	300.0	300.5	295.7	292.4	298.0	297.5	304.7	304.4	309.0	310.7
78.0	292.8	293.2	281.5	281.8	284.1	291.0	292.0	299.9	294.6	303.2
81.0	222.9	226.0	219.0	222.2	220.9	222.2	225.3	229.4	227.0	232.7
84.0	225.1	228.4	223.9	222.4	219.7	222.2	224.2	230.7	228.5	236.5
87.0	186.1	184.2	181.6	180.8	180.3	182.9	186.8	193.7	188.0	192.6
90.0	146.3	146.3	148.8	140.4	146.1	141.5	146.9	147.6	152.9	151.3
93.0	117.5	118.0	115.8	112.8	115.3	111.9	117.8	119.0	121.1	122.2
96.0	83.85	83.90	79.24	79.44	81.70	81.53	84.79	84.99	86.60	86.33
99.0	62.62	64.67	64.87	63.43	62.18	66.93	61.88	66.85	68.08	43.90
102.0	47.76	47.70	44.98	48.02	45.54	45.92	45.04	48.81	46.58	10.30
105.0	34.67	34.64	36.46	35.43	35.92	36.74	37.23	36.77	38.85	6.997
108.0	35.13	34.82	33.81	34.25	35.54	34.83	34.47	36.50	35.63	5.339
111.0	32.70	32.84	32.31	32.92	32.66	33.71	34.67	35.67	35.69	5.959
114.0	35.20	34.87	34.69	33.70	34.51	34.36	34.94	34.45	35.23	6.721
117.0	33.45	32.94	32.68	32.83	33.63	33.22	35.28	34.61	36.41	7.068
120.0	30.18	30.36	29.67	29.37	29.47	29.73	30.88	31.27	30.61	6.207
123.0	22.74	22.63	22.28	22.49	22.83	23.68	23.85	25.12	24.21	5.043
126.0	14.59	14.20	14.12	13.92	14.51	14.54	15.58	15.29	14.98	4.458
129.0	9.170	9.255	9.069	9.248	9.357	9.654	9.965	10.37	8.715	4.130
132.0	7.815	7.893	7.791	7.853	8.103	8.130	8.166	8.137	6.473	3.964
135.0	7.757	7.778	7.846	7.907	8.115	8.105	8.060	7.747	5.876	4.158
138.0	9.026	9.083	9.211	9.049	9.258	9.111	8.993	8.569	6.413	4.538
141.0	10.64	10.61	10.63	10.57	10.82	10.72	10.81	10.32	7.729	4.775
144.0	10.53	10.46	10.48	10.40	10.59	10.62	10.63	10.03	7.296	4.588
147.0	9.340	9.455	9.582	9.896	10.24	10.59	10.61	9.974	7.179	4.556
150.0	8.445	8.488	8.509	8.547	8.639	8.692	8.618	7.006	5.003	3.871
153.0	7.019	7.101	7.058	7.195	7.339	7.547	7.368	5.933	4.131	3.518
156.0	5.742	5.825	5.780	5.853	5.977	6.047	5.727	4.686	3.619	3.280
159.0	4.674	4.678	4.634	4.681	4.721	4.702	4.321	3.620	2.899	2.905
162.0	3.775	3.776	3.704	3.745	3.743	3.655	3.276	2.720	2.400	2.047
165.0	2.958	2.946	2.880	2.855	2.824	2.720	2.429	2.093	1.826	1.742
168.0	2.119	2.106	2.033	1.993	1.942	1.846	1.692	1.551	1.350	1.267
171.0	1.210	1.204	1.146	1.129	1.079	1.023	0.9451	0.8801	0.8208	0.8034
174.0	0.4597	0.4475	0.4177	0.4099	0.3932	0.3686	0.3327	0.3127	0.2881	0.2814
177.0	0.0370	0.0270	0.0060	0.0005	0.0004	0	0.0006	0	0.0006	0.0001
180.0	0	0	0	0	0	0	0	0	0	0
G/C	100.0	110.0	120.0	130.0	140.0	150.0	160.0	170.0	180.0	190.0
0.0	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252
3.0	0.0317	0.0343	0.0394	0.0417	0.0515	0.0585	0.0747	0.0813	0.0738	0.0860
6.0	0.7045	1.057	0.7958	1.203	0.8337	0.9657	0.7828	1.176	0.8300	0.3718
9.0	4.780	4.354	5.812	5.115	6.486	5.686	6.919	5.483	4.062	5.387
12.0	14.67	16.31	16.72	16.93	18.97	19.10	20.19	19.28	14.71	14.26
15.0	57.30	59.04	57.55	48.51	53.80	49.20	55.08	48.75	38.74	40.03
18.0	121.7	130.7	118.0	112.1	115.0	108.0	111.4	106.6	83.42	82.40
21.0	217.8	216.8	214.7	207.8	203.1	200.4	202.8	202.5	161.7	157.8
24.0	329.3	311.0	312.4	311.7	304.5	296.7	303.8	298.4	240.6	244.6
27.0	406.1	408.2	400.3	397.6	393.9	391.9	407.9	402.9	327.2	324.1
30.0	497.9	480.8	494.4	481.9	499.0	493.5	496.6	493.1	409.1	406.7

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

33.0	560.1	570.3	559.6	544.2	553.1	564.0	576.3	587.1	479.8	480.1
36.0	631.9	619.7	625.4	614.8	607.7	635.2	653.5	647.6	536.0	534.3
39.0	675.8	693.0	682.1	671.5	703.8	680.1	706.6	724.0	581.7	578.5
42.0	783.1	775.1	778.2	789.8	785.9	809.6	827.9	843.8	683.4	680.7
45.0	759.5	757.0	773.6	764.2	774.8	785.0	812.9	830.9	689.6	680.1
48.0	881.0	884.1	900.9	897.2	892.2	905.2	918.2	933.7	751.2	749.5
51.0	832.3	833.1	849.0	852.2	853.8	868.2	889.3	895.0	745.0	746.5
54.0	863.9	880.9	895.7	891.4	893.6	907.8	944.8	954.9	790.5	775.8
57.0	808.3	802.8	820.0	819.4	821.2	836.8	865.3	892.9	737.7	741.7
60.0	705.8	701.8	714.4	715.5	721.5	745.4	773.7	796.6	680.8	689.6
63.0	608.0	616.7	617.8	625.9	627.4	650.9	672.7	694.8	586.7	590.4
66.0	524.3	528.2	532.1	539.1	537.8	557.6	571.6	592.2	499.3	504.8
69.0	441.9	445.7	448.9	455.1	450.0	468.0	481.1	502.5	419.4	425.2
72.0	361.4	368.4	364.0	374.4	367.7	390.7	396.9	419.9	351.1	353.2
75.0	306.4	307.7	306.6	308.5	306.5	320.6	324.3	347.1	290.3	290.1
78.0	303.0	304.2	304.7	310.7	306.5	319.3	326.7	332.2	278.0	277.2
81.0	234.3	239.5	241.5	245.7	242.2	252.3	254.8	269.7	231.9	231.5
84.0	240.4	246.8	246.6	249.2	249.2	259.3	263.3	266.6	215.6	214.5
87.0	193.1	194.8	198.9	200.4	203.5	208.8	212.5	220.9	186.4	184.2
90.0	157.9	155.0	160.4	159.5	166.0	164.2	173.8	176.1	150.8	153.1
93.0	122.5	126.5	125.9	129.3	129.8	135.1	138.9	141.2	123.0	121.4
96.0	87.32	87.92	87.13	90.32	92.03	94.40	98.10	104.5	89.63	90.94
99.0	69.36	70.54	71.78	71.47	75.03	75.89	79.34	83.03	68.86	68.99
102.0	52.26	49.51	51.79	52.35	51.08	56.39	56.65	59.14	48.71	50.25
105.0	38.69	38.75	38.72	41.32	40.55	42.68	43.44	44.18	38.68	37.32
108.0	34.70	36.79	38.01	37.45	38.23	39.18	40.85	41.83	33.86	34.78
111.0	36.58	37.97	38.86	39.62	39.21	40.63	41.56	43.06	37.07	35.39
114.0	35.50	36.21	36.93	37.86	38.62	39.25	41.31	41.43	33.61	33.24
117.0	36.92	36.66	41.15	37.76	40.42	39.80	43.46	43.74	36.05	38.21
120.0	30.73	32.86	33.80	34.69	35.16	36.35	37.83	38.69	31.85	31.87
123.0	24.04	27.96	27.88	28.67	28.29	30.24	30.79	31.98	27.85	27.65
126.0	14.77	16.94	17.44	18.49	18.46	19.39	19.72	20.33	18.31	18.36
129.0	8.004	10.69	10.86	11.23	11.13	11.64	11.96	12.63	11.18	11.11
132.0	5.042	8.081	8.761	8.869	8.867	9.116	9.350	9.569	8.192	8.310
135.0	4.605	7.556	8.507	8.639	8.782	8.861	9.190	9.336	7.942	7.937
138.0	4.550	7.909	9.158	9.397	9.518	9.626	9.972	10.15	8.466	8.543
141.0	4.690	8.858	10.62	10.92	11.02	11.22	11.77	12.05	9.841	9.982
144.0	5.060	8.479	10.77	11.48	11.54	12.02	12.44	12.72	10.68	10.64
147.0	5.283	7.634	9.608	10.72	11.01	11.37	11.72	12.20	10.43	10.44
150.0	5.017	5.657	7.034	7.947	8.629	9.496	10.01	10.40	8.988	8.999
153.0	4.321	5.117	5.494	6.119	6.744	7.475	8.112	8.594	7.484	7.597
156.0	3.214	4.024	4.633	4.052	5.041	5.620	6.197	6.720	5.999	6.118
159.0	2.795	3.066	4.152	4.539	4.025	4.443	4.744	5.161	4.651	4.793
162.0	2.002	2.272	2.913	3.309	3.406	3.556	3.778	4.000	3.594	3.751
165.0	1.741	1.920	2.295	2.533	2.662	2.837	2.889	3.081	2.792	2.936
168.0	1.336	1.432	1.533	1.653	1.786	1.963	2.082	2.226	2.019	2.098
171.0	0.7962	0.8134	0.7870	0.7940	0.8416	0.9686	1.060	1.128	1.137	1.270
174.0	0.2800	0.2702	0.2611	0.2653	0.2743	0.3063	0.3466	0.4227	0.4927	0.5546
177.0	0.0010	0.0008	0.0013	0.0008	0.0011	0.0048	0.0186	0.0394	0.0824	0.0997
180.0	0	0	0	0	0	0	0	0	0	0
G/C	200.0	210.0	220.0	230.0	240.0	250.0	260.0	270.0	280.0	290.0
0.0	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252
3.0	0.0879	0.0975	0.0996	0.1096	0.1061	0.1120	0.1045	0.1091	0.0945	0.0954
6.0	0.2917	0.2797	0.2411	0.2471	0.4822	0.2561	0.2412	0.2331	0.2234	0.2133
9.0	3.295	3.881	2.588	3.213	2.148	2.128	1.843	1.974	1.842	2.103
12.0	13.89	12.48	12.15	10.69	10.68	9.435	9.713	8.532	8.277	9.085
15.0	32.17	34.54	28.76	28.66	28.05	27.78	24.23	24.29	22.91	25.78
18.0	75.80	74.06	70.12	71.63	71.65	75.62	78.52	86.80	88.17	82.84
21.0	148.3	145.6	144.3	148.2	145.5	164.3	153.0	160.1	164.9	168.4
24.0	230.1	228.1	223.8	223.8	219.2	223.6	222.6	231.8	240.8	232.4
27.0	315.6	314.9	309.6	309.5	308.6	328.9	329.1	328.8	339.1	353.4
30.0	399.0	396.0	399.0	390.6	403.5	402.5	434.5	431.3	445.4	452.6
33.0	476.3	471.6	467.9	466.4	484.2	491.6	503.4	503.2	509.3	509.8
36.0	530.1	536.2	533.6	552.4	547.0	550.8	564.1	568.7	574.3	578.3
39.0	592.1	585.9	601.4	596.7	603.9	607.4	614.5	640.8	637.0	632.9
42.0	660.7	661.2	677.7	672.6	687.8	686.2	692.6	728.3	723.9	724.6
45.0	681.5	671.0	705.6	708.2	743.7	729.9	744.0	738.7	758.9	759.1
48.0	732.7	729.5	735.4	740.2	753.9	772.9	790.4	810.6	807.2	819.9
51.0	754.4	758.7	769.5	775.5	799.5	812.5	817.1	826.9	843.6	849.6
54.0	773.7	783.6	797.8	814.3	845.8	854.3	851.2	851.1	864.2	868.2
57.0	737.3	737.4	749.0	753.1	776.6	790.0	797.0	802.8	824.1	813.5
60.0	688.0	691.8	708.0	718.6	742.3	759.1	761.6	771.9	779.8	777.7
63.0	586.0	593.0	607.1	612.2	636.7	648.9	666.8	675.1	689.8	680.6
66.0	503.5	503.8	526.8	531.4	557.1	565.7	569.8	578.3	592.1	586.6

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

69.0	426.9	430.5	446.3	451.3	469.7	477.6	487.2	492.4	499.2	500.4
72.0	356.4	359.8	377.2	381.1	396.4	404.0	411.5	414.6	421.7	427.9
75.0	296.2	293.0	305.7	308.3	325.2	328.2	341.9	334.8	349.2	343.3
78.0	278.9	277.2	288.3	292.0	304.9	304.8	314.5	317.2	325.6	322.7
81.0	234.5	234.3	239.8	238.6	249.3	255.9	266.0	264.6	268.0	265.5
84.0	213.6	212.8	217.9	219.7	227.5	230.1	233.4	237.2	241.8	252.9
87.0	189.5	187.0	191.9	192.5	198.8	199.9	206.7	205.7	209.0	206.4
90.0	152.6	153.8	156.5	158.1	162.1	165.7	168.3	168.4	170.9	173.8
93.0	123.0	124.6	129.4	129.5	134.8	134.5	136.4	138.1	139.8	136.8
96.0	94.14	92.25	97.93	97.57	101.7	103.2	106.6	104.0	107.1	104.9
99.0	69.17	68.03	71.16	67.68	71.88	71.70	72.71	44.96	77.12	77.43
102.0	51.41	46.61	53.52	52.66	54.42	55.57	58.76	18.86	57.29	58.04
105.0	36.13	38.22	37.05	38.79	43.16	42.26	40.77	14.27	43.01	40.21
108.0	35.10	33.10	34.59	35.40	35.70	36.32	39.11	13.25	37.53	39.63
111.0	35.40	36.28	35.98	35.67	34.80	38.28	37.94	13.03	37.97	37.65
114.0	32.20	31.19	31.59	32.26	32.50	33.07	32.89	12.49	34.16	35.10
117.0	34.63	35.99	33.58	36.50	37.41	38.89	34.42	12.47	34.18	39.50
120.0	31.45	31.03	31.45	31.71	31.87	32.01	31.11	10.87	30.81	31.93
123.0	27.84	27.26	27.84	27.51	28.69	28.89	28.47	8.170	27.88	27.97
126.0	18.78	18.40	19.04	18.37	18.65	17.96	17.24	6.656	16.86	17.41
129.0	11.25	11.84	11.35	11.34	11.50	11.28	10.39	6.201	10.58	11.42
132.0	8.319	8.183	8.262	8.225	8.456	8.213	7.099	6.396	7.391	8.579
135.0	7.967	7.919	7.930	7.960	8.026	7.566	6.529	6.907	6.864	8.189
138.0	8.468	8.433	8.425	8.468	8.628	8.293	6.961	7.814	7.419	8.962
141.0	9.953	9.887	9.913	10.12	10.14	9.926	8.330	9.093	9.059	11.10
144.0	10.61	10.44	10.68	10.82	10.94	10.62	9.094	8.443	9.085	10.83
147.0	10.41	10.36	10.64	10.82	10.99	10.74	9.390	8.786	9.771	11.13
150.0	8.998	8.981	9.245	9.242	9.306	8.788	7.604	7.483	7.780	9.058
153.0	7.630	7.686	7.955	7.959	8.017	7.431	6.780	6.834	6.905	7.669
156.0	6.282	6.348	6.544	6.530	6.526	5.883	5.756	5.723	5.778	6.029
159.0	4.928	5.047	5.202	5.136	4.969	4.528	4.599	4.694	4.678	4.682
162.0	3.887	3.954	4.066	3.927	3.833	3.581	3.719	3.787	3.843	3.824
165.0	3.023	3.058	3.099	2.988	2.896	2.807	2.900	2.929	2.998	3.014
168.0	2.208	2.233	2.251	2.143	2.106	2.067	2.128	2.136	2.199	2.221
171.0	1.367	1.393	1.414	1.361	1.362	1.348	1.371	1.375	1.417	1.429
174.0	0.6173	0.6400	0.6582	0.6509	0.6669	0.6594	0.6666	0.6657	0.6839	0.6791
177.0	0.1218	0.1351	0.1572	0.1520	0.1581	0.1626	0.1725	0.1671	0.1685	0.1594
180.0	0	0	0	0	0	0	0	0	0	0
G/C	300.0	310.0	320.0	330.0	340.0	350.0				
0.0	0.0252	0.0252	0.0252	0.0252	0.0252	0.0252				
3.0	0.0814	0.0841	0.0702	0.0748	0.0608	0.0618				
6.0	0.1989	0.2014	0.2253	0.2452	0.2531	0.3080				
9.0	2.108	3.239	2.584	3.947	3.282	4.947				
12.0	10.69	11.14	12.05	13.33	15.56	16.07				
15.0	28.28	36.65	33.74	41.10	39.91	49.84				
18.0	85.45	85.43	80.98	89.28	92.73	101.3				
21.0	164.0	171.9	167.6	180.4	186.9	203.0				
24.0	245.3	255.1	257.0	273.9	288.5	308.4				
27.0	340.1	361.8	351.7	374.3	382.7	406.0				
30.0	420.8	457.6	446.7	476.9	483.8	507.4				
33.0	512.3	526.9	531.1	563.3	557.8	584.9				
36.0	589.8	579.2	605.0	630.6	638.5	657.6				
39.0	640.7	661.6	676.0	683.8	703.8	747.7				
42.0	731.8	750.6	745.7	791.6	813.2	835.2				
45.0	756.1	771.3	776.0	789.0	806.1	830.8				
48.0	822.1	822.2	826.8	865.3	882.8	911.3				
51.0	861.3	859.4	854.1	881.6	903.4	917.2				
54.0	892.6	899.7	906.7	929.6	940.5	965.3				
57.0	840.6	832.8	834.8	860.4	881.4	899.6				
60.0	794.6	794.7	787.2	798.9	808.3	823.4				
63.0	688.3	678.8	679.6	688.4	706.4	716.5				
66.0	596.7	591.5	587.3	593.7	611.5	619.1				
69.0	503.5	503.4	499.7	509.6	523.9	534.8				
72.0	423.2	421.8	419.6	429.3	439.6	450.3				
75.0	346.7	342.1	344.3	343.0	355.8	362.3				
78.0	329.3	330.4	334.9	345.3	355.6	362.3				
81.0	270.2	264.5	266.0	265.9	271.9	273.3				
84.0	257.6	259.2	267.3	269.6	279.2	277.1				
87.0	212.5	214.3	216.0	217.6	228.3	228.5				
90.0	172.6	177.1	170.0	176.3	175.1	181.4				
93.0	143.5	139.4	139.4	139.1	143.1	148.1				
96.0	109.6	104.2	109.7	105.5	109.5	107.4				
99.0	79.62	76.15	76.31	75.98	82.12	81.07				
102.0	56.47	57.52	53.55	55.86	57.16	55.98				

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: Paul
 Test Date: 19 April 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
 Humidity: 65.1%
 Test Distance: 1.136m [K=1.0000]
 Remarks:



Photometric Data Table [cd]

105.0	44.74	42.31	41.06	43.89	43.32	44.43
108.0	38.22	37.98	38.71	39.77	42.37	41.36
111.0	38.93	37.99	37.94	39.10	39.82	39.91
114.0	35.61	37.51	37.97	39.74	40.88	42.17
117.0	36.27	38.83	37.44	39.95	40.27	41.60
120.0	33.22	33.89	34.42	35.46	36.72	37.06
123.0	28.83	27.51	27.77	27.36	28.95	29.27
126.0	17.78	17.85	18.15	18.29	18.55	18.73
129.0	11.71	11.68	11.64	11.61	12.08	11.85
132.0	8.917	8.914	8.849	9.114	9.408	9.791
135.0	8.534	8.685	8.702	9.009	9.240	9.550
138.0	9.508	9.925	10.16	10.56	10.71	11.02
141.0	11.43	11.74	11.71	12.22	12.52	13.12
144.0	11.39	11.84	12.10	12.36	12.62	12.93
147.0	11.47	11.51	11.49	11.44	11.70	11.79
150.0	9.746	9.967	10.07	10.18	10.46	10.57
153.0	8.336	8.528	8.556	8.526	8.691	8.790
156.0	6.650	6.854	6.934	6.994	7.151	7.185
159.0	5.111	5.427	5.506	5.594	5.736	5.784
162.0	4.090	4.325	4.477	4.546	4.671	4.675
165.0	3.191	3.354	3.508	3.604	3.691	3.732
168.0	2.356	2.454	2.573	2.654	2.725	2.715
171.0	1.497	1.549	1.601	1.629	1.655	1.625
174.0	0.7027	0.7004	0.7099	0.7131	0.7147	0.6825
177.0	0.1602	0.1543	0.1550	0.1323	0.1185	0.0970
180.0	0	0	0	0	0	0

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.2DEG
Operators: Paul
Test Date: 19 April 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.421
Humidity: 65.1%
Test Distance: 1.136m [K=1.0000]
Remarks: