

Commercial Bollards

Engineered for outdoor resilience, bollard lights provide efficient, low-glare lighting, perfect for enhancing visibility and ambiance in landscape areas.



FEATURES

- 3 base heights and 2 head options
- Input voltage range: 120-347V AC
- High efficiency: >92% power efficiency
- Dimmable: 0-10V dimming
- Surge protection: 4KV/6KV
- Tunable CCT: 3000/4000/5000K
- Wide beam angle: 110°x105°
- Durable build: IP65 rating, die-cast aluminum housing
- Long lifespan: >50,000 hours
- Certifications: ETL/DLC 5.1 premium
- Warranty: 5 years

APPLICATIONS

- Pathways and walkways
- Gardens and flower beds
- Driveways and entrances
- Outdoor seating areas
- Pool decks and water features
- Perimeter and boundary lighting


SPECIFICATIONS

| Product Code | Head | WF-CB-MV-H-RMW (Round) | | WF-CB-MV-H-FMW (Flat) |
|-------------------|---|--------------------------------|-----------------------------|------------------------------|
| | Body | WF-CB-MV-BD1050 | WF-CB-MV-BD670 | WF-CB-MV-BD400 |
| Electrical | Input Voltage | 120-347V AC | | |
| | Power Consumption | 25/20/15/8W | | |
| Specs | Colour Temperature | 3000/4000/5000K (TUNABLE) | | |
| | CRI | 70+ | | |
| | Lumen Output | 3,125/2,500/1,875/1,000LM | | |
| | Efficacy | 125 LM/W | | |
| | Dimmable | 0-10V | | |
| | Beam Angle | 110° x 105° | | |
| LED | Type | 3030 | | |
| | Life Span | >50,000 Hours | | |
| Design | Dimensions (Inches) | R: H= 41.34" F: H = 39.49" | R: H= 26.4" F: H = 24.53" | R: H= 15.75" F: H = 13.90" |
| | | W= 5.91" | | |
| | Dimensions (Millimeters) | R: H= 1050mm F: H = 1003mm | R: H= 670mm F: H = 623mm | R: H= 400mm F: H = 353mm |
| | | W= 150mm | | |
| | Finish | Black | | |
| | Material | Die-cast Aluminum | | |
| | Operating Temperature | -40°F to 104°F (-40°C to 40°C) | | |
| Approved Location | Outdoor | | | |
| Mounting | Via base, refer to instructions for details | | | |
| Warranty | 5 years | | | |

NOTE: Fixture Head (Round or Flat) and Body are to be ordered separately.




DIAGRAM

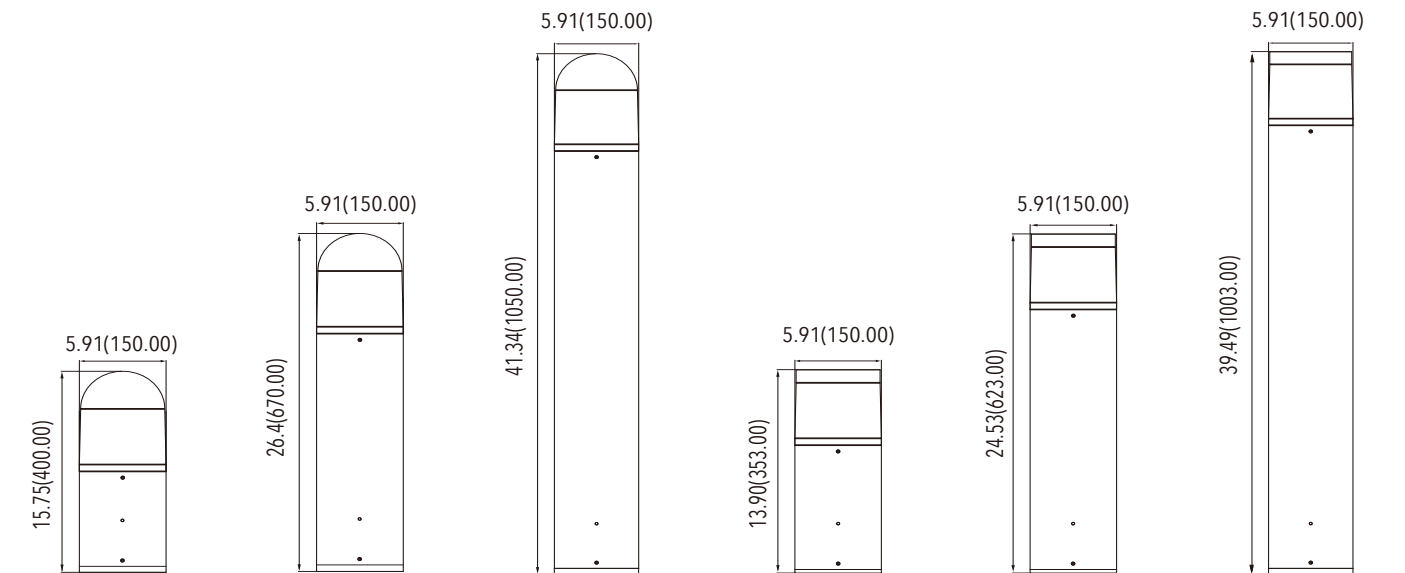

ACCESSORIES



WF-CB-SP
Surge Protector



WF-CB-MT
Anchor Bolt Carrier

NOTE: A transformer is required. See page 108 to 111.

