

T-Edge Lights (5CCT)

An innovative lighting solution, ideal for general and accent lighting in offices, hallways, and commercial applications. Its edge-lit design and 5CCT feature ensure versatile illumination, moving beyond traditional flat panels and troffers.



FEATURES

- Ideal replacement for traditional flat panel and troffers
- Non-flicker, no dark spots
- IP Rating: IP40
- cETLus and DLC premium listed
- Dry locations
- 5 year limited warranty

APPLICATIONS

- RESIDENTIAL

 - Kitchens
 - Bathrooms
 - Laundry rooms
 - Pantries
 - Rec rooms
- COMMERCIAL

 - Retail
 - Offices
 - Hallways
 - Elevators
 - Banquet halls
 - Restaurants


SPECIFICATIONS			
Product Code		TLE-2X2-K40-3065	TLE-2X4-K60-3065
Electrical	Input Voltage	100-277V AC	
	Power Consumption	20/30/40W Adjustable	40/50/60W Adjustable
Specs	Colour Temperature	3000/3500/4000/5000/6500K	
	CRI	80+	
	Lumen Output	2500-5000LM	5000-7500LM
	Efficacy (LM/W)	130	
	Dimmable	0-10V Dimming	
	Beam Angle	120°	
	LED	Life Span	50,000 Hours
Design	Dimensions (Inches)	23.74 x 23.74 x 0.59"	23.74 x 47.76 x 0.59"
	Dimensions (Millimeters)	603 x 603 x 15mm	603 x 1213 x 15mm
	Finish	White	
	Housing Material	6063-T5	
	Operating Temperature	-20° to 45°C	
	Approved Location	Dry	
	Mounting	Ceiling (placed upon t-bar or hung with wire)	
Warranty	5 years		
Approvals	cETLus and DLC Premium		

PRODUCT CODES

TLE - 2X2 - K40 - 3065
TLE - 2X4 - K60 - 3065

SIZE WATTS

DIAGRAM

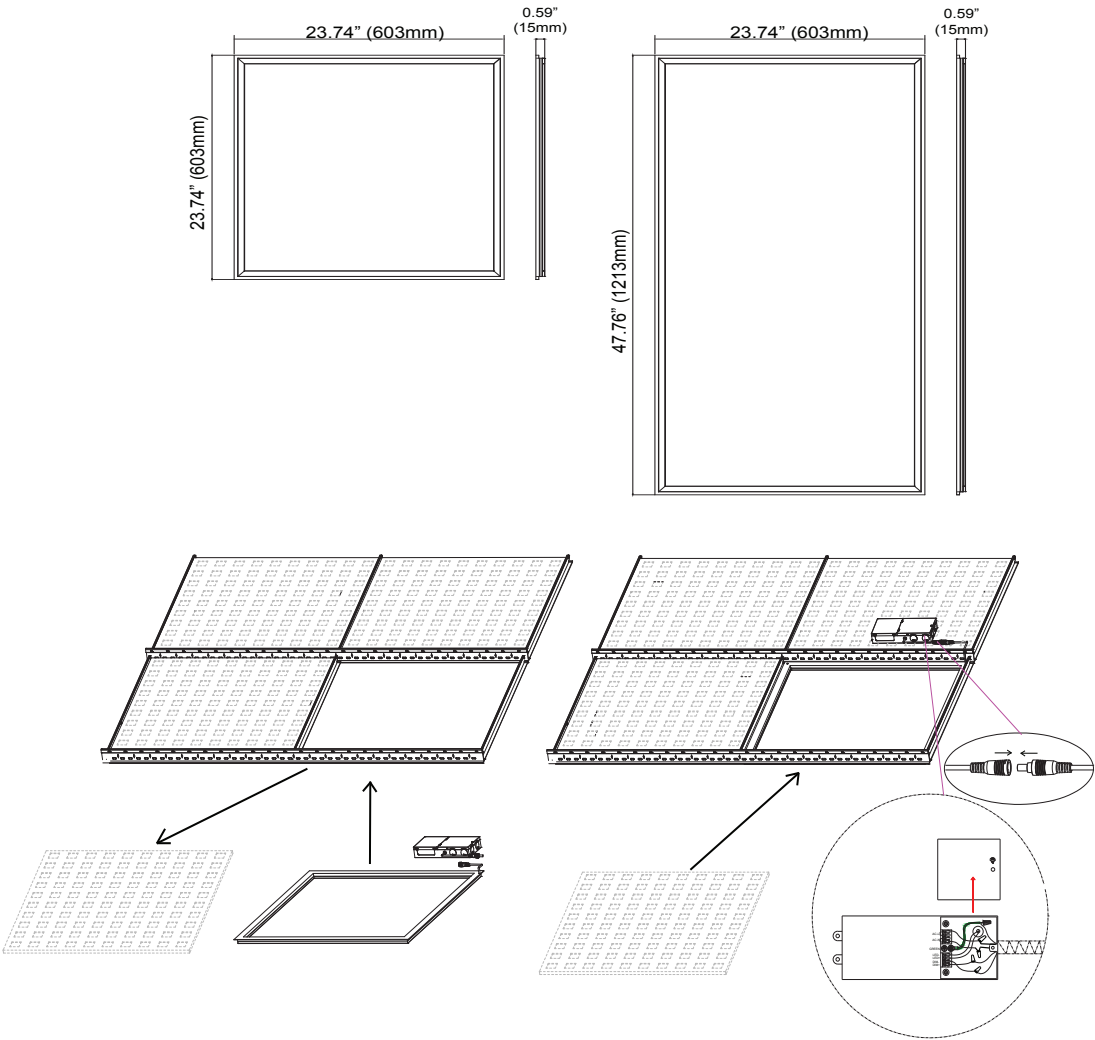

ACCESSORIES



TLE-DM
Driver mount bracket (for mounting the bracket to the T-BAR)



TLE-MC
Mounting clips (for fixture wire suspension)



ELP14-2060-UNV
Emergency Driver (sold separately)

NOTES:

- TLE-EX-CCT-10: T-LED CCT Edge Light Extension Cord. 10ft is available.
- Driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories.