


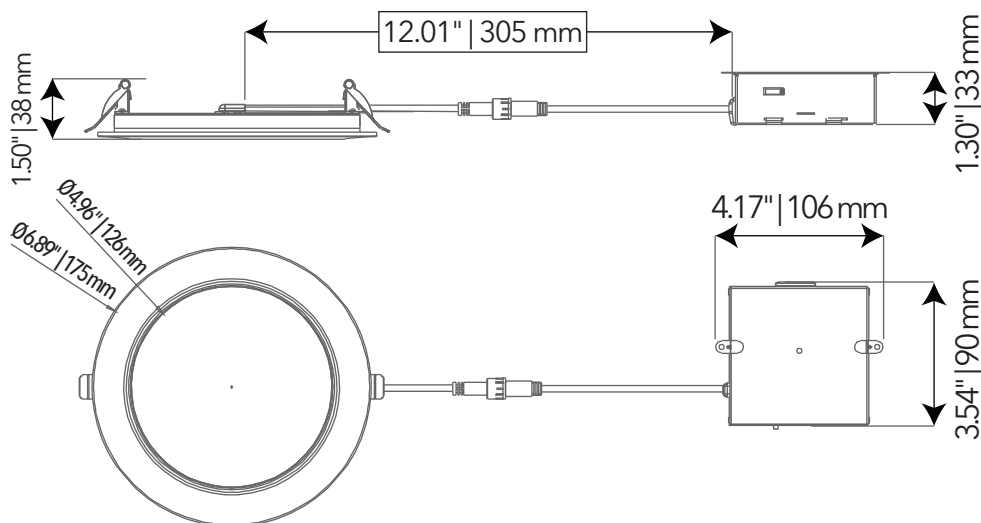

ACCESSORIES

Extension Cables

- FLEX-4
- FLEX-6
- FLEX-10
- FLEX-20

Mounting Plates

- MP6
- MP6-1 – 6"
- MP-UNV-346

Decorative Trim Ring

- ADET6-BK
- ADET6-BZ
- ADET6-BN
- ADET6-CP

SPECIFICATIONS

Input Voltage	120V AC	Rating	Airtight, IC Rated, Wet Location
Power Consumption	12W, 15W	Power Factor	>0.9
Mounting	Spring Clips (No box required)	Lifespan	50,000 Hours
Color Temperature	5CCT: 2700-5000K	Dimensions (")	4", 6"
Lumen Output	800 lm, 1100-1418 lm	Dimensions (mm)	(102 & 152 mm)
Beam Angle	120°	Operating Temp.	-20°C to 40°C (-4°F to 104°F)
Dimmable	Yes - TRIAC	Custom Cuttable	Ø4.25, Ø6.22" (108, 158 mm)
Driver	Integrated (with J-box)	Fire Rating	2H (UL 263, ASTM E119, ULC S101)
CRI	90+	Warranty	5 Years
Finish	White	Certifications	cETLus, Energy Star

Ordering Code(s)

- RGL-FR-5CCT-4-WH
- RGL-FR-5CCT-6-WH

Project

Type

Date

Contact

Notes