



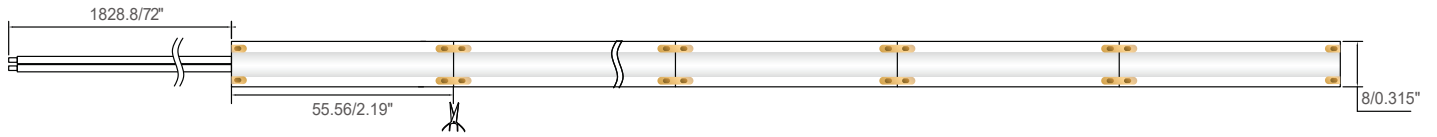

■ STREAMLINE TAPE SERIES

# Low Power Indoor (3000K)



## ACCESSORIES

6' Powerfeed	6" Jumper	Splice	L-shaped Connector	T-shaped Connector
SL-ID-BWBC-6	SL-ID-W2BC-72	SL-ID-B2BC	SL-ID-LC	SL-ID-TC

## CONTROLLERS

0/1 ~ 10V Dimming Controller	CNTRL-0-10V-DIM
Rotating CCT Scene Remote White / Black	<ul style="list-style-type: none"> <li>CNTRL-4Z-CCT-RWP-WH</li> <li>CNTRL-4Z-CCT-RWP-BK</li> </ul>
4 Zone CCT Remote	CNTRL-4Z-CCT-RM

## DRIVERS

Dimmable	
Dimmable Electronic LED Driver:	<ul style="list-style-type: none"> <li>TRE24L40DC</li> <li>TRE24L96DC</li> </ul>
Switchex	SX-24V-DD-100W
Non-Dimmable	
Plug-in Driver	<ul style="list-style-type: none"> <li>PGID2448</li> <li>PGID2496</li> </ul>
Indoor/Outdoor driver	LEDDR-24-120W

## Specifications

Input Voltage	24V DC	Binning	1BIN
Power Consumption	1.46W/ft (4.8 W/m)	SDCM	<3
Efficacy	110Lm/w	Lifespan	50,000 Hours
Color Temperature	3000K	Dimensions (Inches)	.31" W
Lumen Output	160Lm/ft (528Lm/m)	Dimensions (Millimeters)	8mm W
Beam Angle	140°	Max Length	40Ft (12M)
Dimmable	Yes (PWM / 0-10V / 1-10V)	Custom Cuttable	2.19" (55.5mm)
Chip Type	2219	IP Rating	IP40
CRI	90	Approved Location	Indoor
# per meter	288	Warranty	5 Years

## Ordering Code(s)

- SL-ID-30K-LP-XX-A8 [XX: Length in feet; A: 2219 LED; 8: 8mm PCB]  
Available in 20 or 100 feet; For 20 feet: SL-ID-30K-LP-20-A8; For 100 feet: SL-ID-30K-LP-100-A8

Project		Type	
Date		Contact	
Notes			