

# High Power and Low Power Indoor (3000K)

Available in High Power and Low Power models, these indoor LED tape lights deliver smooth, pixel-free illumination and are ideal for a wide range of lighting fixtures. Built with dense 2219 LED chips and engineered for consistent colour output, both options offer reliable, long-lasting performance.


## FEATURES

- Dense 2219 LEDs per meter for seamless, uniform lighting.
- IP40 rated for protected indoor environments.
- 3000K warm white with CRI 90+.
- cULus listed for safety and quality assurance.
- SDCM <3, 1 BIN selection for uniformity.
- 5-year product warranty.



## APPLICATIONS

- Under Cabinet
- Displays
- Coves
- Wall Grazing
- Architectural Features



SPECIFICATIONS		
<b>Product Code</b>	SL-ID-30K-LP-XX-A8 [XX: Length in feet; A: 2219 LED; 8: 8mm PCB] Available in 20 or 100 feet; For 20 feet: SL-ID-30K-LP-20-A8; For 100 feet: SL-ID-30K-LP-100-A8	SL-ID-30K-HP-XX-A8 [XX: Length in feet; A: 2219 LED; 8: 8mm PCB] Available in 20 or 100 feet; For 20 feet: SL-ID-30K-HP-20-A8; For 100 feet: SL-ID-30K-HP-100-A8
<b>Electrical</b>	<b>Input Voltage</b> 24V DC	
	<b>Power Consumption</b> 1.46W/ft (4.8 W/m)	2.93W/ft (9.6W/m)
	<b>Efficacy</b> 102Lm/w	110Lm/w
<b>Specs</b>	<b>Colour Temperature</b> 3000K	
	<b>Lumen Output</b> 160Lm/ft (528Lm/m)	300Lm/ft (980Lm/m)
	<b>Beam Angle</b> 140°	
	<b>Dimmable</b> Yes (PWM / 0-10V / 1-10V)	
<b>LED</b>	<b>Chip Type</b> 2219	
	<b>CRI</b> 90	
	<b># per metre</b> 288	
	<b>Binning</b> 1BIN	
	<b>SDCM</b> <3	
	<b>Lifespan</b> 50,000 Hours	
<b>Design</b>	<b>Dimensions (Inches)</b> .31" W	
	<b>Dimensions (Millimeters)</b> 8mm W	
	<b>Max Length</b> 20Ft (6M)	
	<b>Custom Cuttable</b> 2.19" (55.5mm)	
	<b>IP Rating</b> IP40	
	<b>Approved Location</b> Indoor	
<b>Warranty</b>	5 Years	
<b>Approvals</b>	cULus	




## ACCESSORIES



**SL-ID-W2BC-72**  
6' Powerfeed      **SL-ID-BWBC-6**  
6" Jumper      **SL-ID-B2BC**  
Splice      **SL-ID-LC**  
L-shaped Connector      **SL-ID-TC**  
T-shaped Connector

## DRIVERS

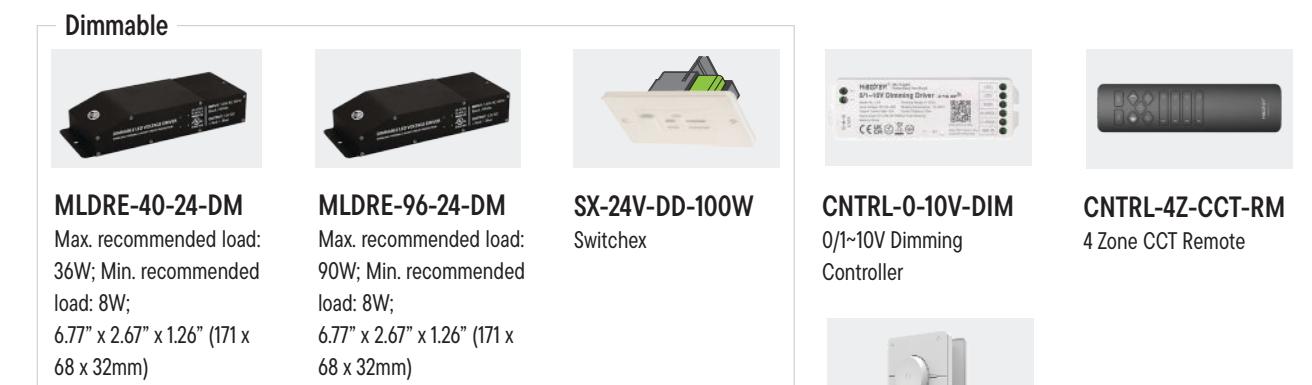

**Dimmable**  
**MLDRE-40-24-DM**  
Max. recommended load:  
36W; Min. recommended  
load: 8W;  
6.77" x 2.67" x 1.26" (171 x  
68 x 32mm)      **MLDRE-96-24-DM**  
Max. recommended load:  
90W; Min. recommended  
load: 8W;  
6.77" x 2.67" x 1.26" (171 x  
68 x 32mm)      **SX-24V-DD-100W**  
Switchex  
**CNTRL-0-10V-DIM**  
0/1~10V Dimming  
Controller  
**CNTRL-4Z-CCT-RM**  
4 Zone CCT Remote

**Non-Dimmable**  
**MLDR-120-24**  
Indoor/Outdoor driver  
Max. recommended load:  
90W;  
10" x 3 3/8" x 3 3/16" (254  
x 85.7 x 80.9mm)      **MLDR-20-24JB**  
Indoor driver  
Max recommended load:  
18W;  
4 1/8" x 4 1/8" x 11/2"  
(104.8 x 104.8 x 38.1mm)      **PGID2448/**  
**PGID2496**  
Plug-in Driver  
**CNTRL-4Z-CCT-RWP-WH**  
OR  
**CNTRL-4Z-CCT-RWP-BK**  
Rotating CCT Scene Remote  
(White or Black)