



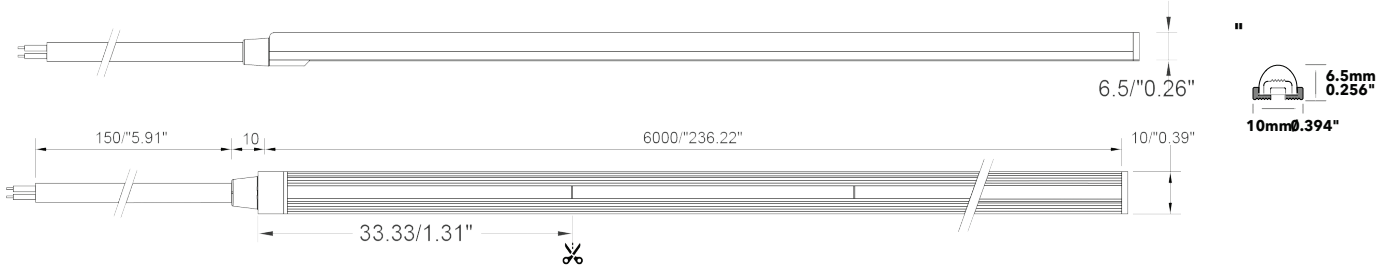

■ STREAMLINE TAPE SERIES

Tunable CCT Outdoor, High Power & Low Power



SPECIFICATIONS	
6" Jumper	SL-OD-BWBC-6
Splice	SL-OD-B2BC
6' power feed	SL-OD-W2BC-72
Mounting Clips	SL-OD-MC
1M Solid Mounting Extrusion	SL-OD-EX-39
Silicone Glue	NFLX-GLUE

SPECIFICATIONS	
2 Wire CCT Controller	CNTRL-2W-CCT
Rotating CCT Scene Remote (White or Black)	CNTRL-4Z-CCT-RWP-WH OR CNTRL-4Z-CCT-RWP-BK
4 Zone CCT Remote	CNTRL-4Z-CCT-RM
8 Zone RGB+CCT Wall Panel Remote	CNTRL-8Z-RGBCCT-WP
4-Zone RGB+CCT Remote	CNTRL-4Z-RGBCCT-RM

DRIVERS (NON-DIMMABLE)
Plug-in Driver 48W/96W:
<ul style="list-style-type: none"> PGID2448 PGID2496
Indoor/Outdoor driver:
LEDDR-24-120W

SPECIFICATIONS			
Input Voltage	24V DC	SDCM	<3
Power Consumption	<ul style="list-style-type: none"> 4.27W/ft (14W/m) 1.83W/ft (6W/m) 	Lifespan	50,000 Hours
Efficacy	110Lm/w	Dimensions (Inches)	.25" W
Color Temperature	2700K-6500K	Dimensions (Millimeters)	6.5mm W
Lumen Output	<ul style="list-style-type: none"> 470Lm/ft (1540Lm/m) 201Lm/ft (660Lm/m) 	Max Length	<ul style="list-style-type: none"> 20Ft (6M) 40Ft (12M)
Beam Angle	140°	Custom Cuttable	1.31" (33.33mm)
Chip Type	2835	IP Rating	IP67
CRI	90	Approved Location	Outdoor/Indoor
# per meter	242	Warranty	5 Years
Binning	1BIN	Approvals	cULus

Ordering Code(s)

- SL-OD-CCT-HP-XX-B8 [XX: Length in feet; B: 2835 LED; 8: 8mm PCB], Available in 20 feet: SL-OD-CCT-HP-20-B8
- SL-OD-CCT-LP-XX-B8 [XX: Length in feet; B: 2835 LED; 8: 8mm PCB], Available in 20 feet: SL-OD-CCT-LP-20-B8

Project		Type	
Date		Contact	
Notes			