
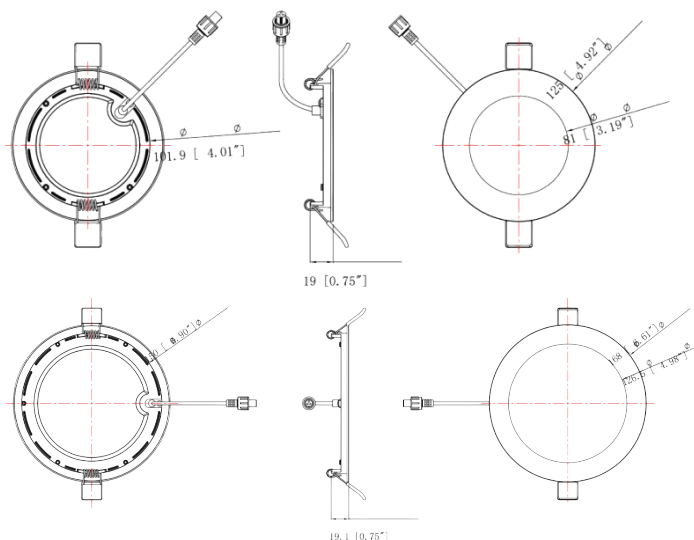


With an ultra-thin 9mm profile, double-sided frosted diffuser, and advanced ADC12 aluminum cooling frame, this dimmable LED light offers even illumination, energy efficiency (PF > 0.9), and protection for wet locations.

Dimensions for 4-inch: Cut-out size: 4.25"

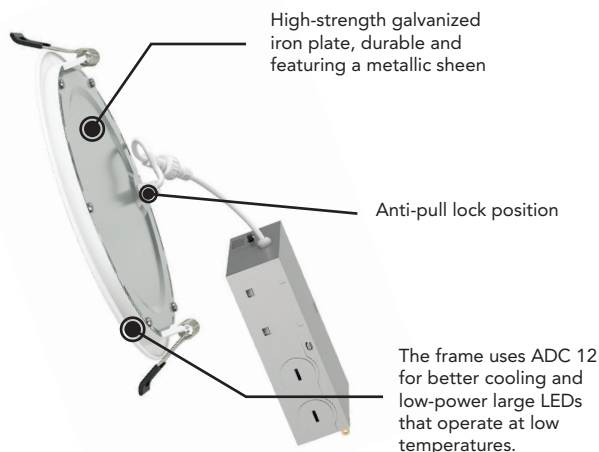

Dimensions for 6-inch: Cut-out size: 6.25"

Key Features

- Ultra-thin 0.35-inch profile.
- 5CCT options: 2700K-5000K.
- High CRI > 90.
- Even light distribution, frosted diffuser.
- Triac dimmable, 5%-100%.
- ADC12 aluminum cooling frame.
- High power factor (>0.9).
- suitable for wet location.
- Connector with strain relief design.
- Great spring elasticity, 6N-8N force.
- 50,000 hour life.
- 5 year limited warranty.

Specifications

Sizes	4" and 6"
Input Voltage	120V AC
Wattages	9W and 12W
Lumens	>850Lm(30K), >1200Lm(30K)
Beam Angle	110 Degree
CCT	5CCT (2700 - 5000K)
CRI	>90
Lifespan	50,000 Hours
Limited Warranty	5years
Approvals	cETLus, Energy Star, Title 24

Ordering Code(s)

4"
1 Pack

SDL-5CCT-4-WH-1P

6 Pack

SDL-5CCT-4-WH-6P

12 Pack

SDL-5CCT-4-WH-12P

24 Pack

SDL-5CCT-4-WH-24P

6"

SDL-5CCT-6-WH-1P

SDL-5CCT-6-WH-6P

SDL-5CCT-6-WH-12P

Project

Type

Date

Contact

Notes