


5CCT Ultra-Thin LED Recessed Ceiling Light



With an ultra-thin 9mm profile, double-sided frosted diffuser, and advanced ADC12 aluminum cooling frame, this dimmable LED light offers even illumination, energy efficiency (PF > 0.9), and IP40 protection for wet locations.

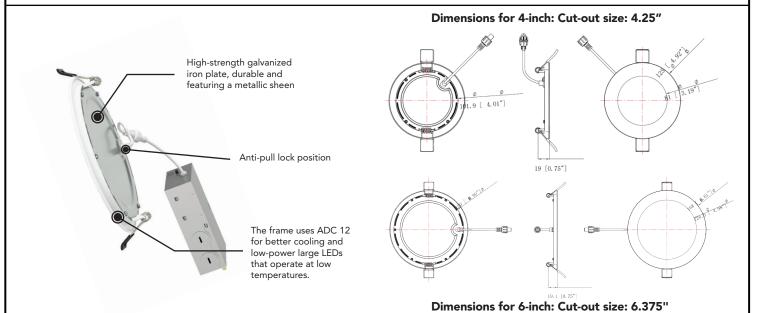

Key Features

- Ultra-thin 0.35-inch profile.
- 5CCT options: 2700K-5000K.
- High CRI > 90.
- Even light distribution, frosted diffuser.
- Triac dimmable, 5%-100%.
- ADC12 aluminum cooling frame.
- High power factor (>0.9).
- IP40 listed; suitable for wet location.
- Connector with strain relief design.
- Great spring elasticity, 6N-8N force.
- 50,000 hour life.
- 5 year limited warranty.

Specifications							
Sizes	4" and 6"						
Input Voltage	120V AC						
Wattages	9W and 12W						
Lumens	738Lm, >984Lm						
Beam Angle	110 Degree						
ССТ	5ССТ (2700 - 5000К)						
CRI	>90						
Lifespan	50,000 Hours						
Limited Warranty	5years						
Approvals	cETLus						

Ordering Code(s)			1 Pack		6 Pack		12 Pack	24 Pack
		4″	SDL-5CCT-4-WH-1P		SDL-5CCT-4-WH-6P		SDL-5CCT-4-WH-12P	SDL-5CCT-4-WH-24P
		6″	SDL-5CCT-6-WH-1P		SDL-5CCT-6-WH-6P		SDL-5CCT-6-WH-12P	SDL-5CCT-6-WH-24P
Project					Туре			
Date				C	Contact			
Notes								
MAGIC LITE \$ 905.825.9592 Ights@magiclite.com								