


This remote uses 2.4GHz RF technology for low power consumption, a 30m range, and strong anti-interference. It controls color temperature and brightness across four zones, with a magnetic base for secure installation and a compact, portable design for customizable lighting scenes.

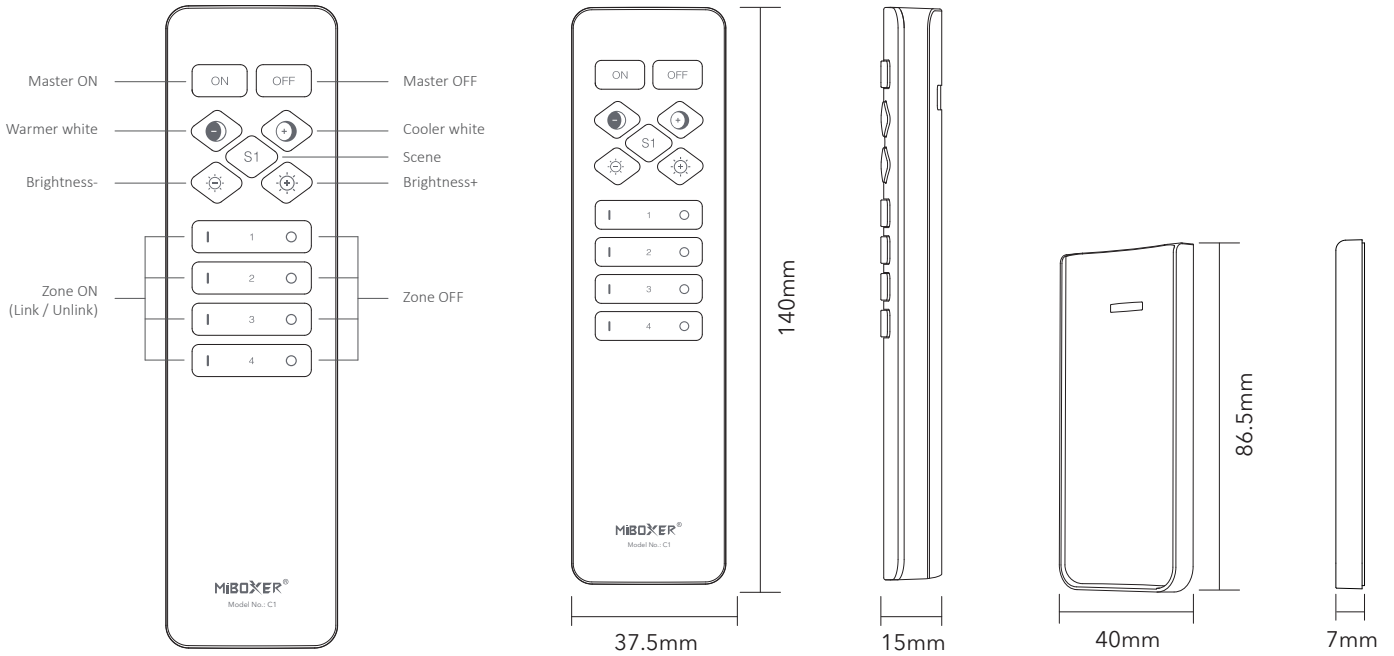

Compatible Fixtures	Ordering Code(s)
Tunable CCT, High Power Indoor	SL-ID-CCT-HP-XX-A8
Tunable CCT, Low Power Indoor	SL-ID-CCT-LP-XX-A8
Tunable CCT, High Power Outdoor	SL-OD-CCT-HP-20-B8
Tunable CCT, Low Power Outdoor	SL-OD-CCT-LP-XX-B8
Low Power Indoor (3000K)	SL-ID-30K-LP-XX-A8

Specifications	
Working Voltage	3V (AAA * 2PCS)
Standby Power Consumption	5 Microamperes
Transmitting Power	6dBm
RF	2.4GHz
Control Distance	30m
Modulation Method	GFSK
Operating Temperature	-10 to 40°C
Transmission Frequency	2400-2483.5MHz
Approvals	RoHS

## Ordering Code(s)

• CNTRL-4Z-CCT-RM

Project		Type	
Date		Contact	
Notes			