




# InfiniDrive™


## DR-60-12-WPWL-5N1D

### Class P

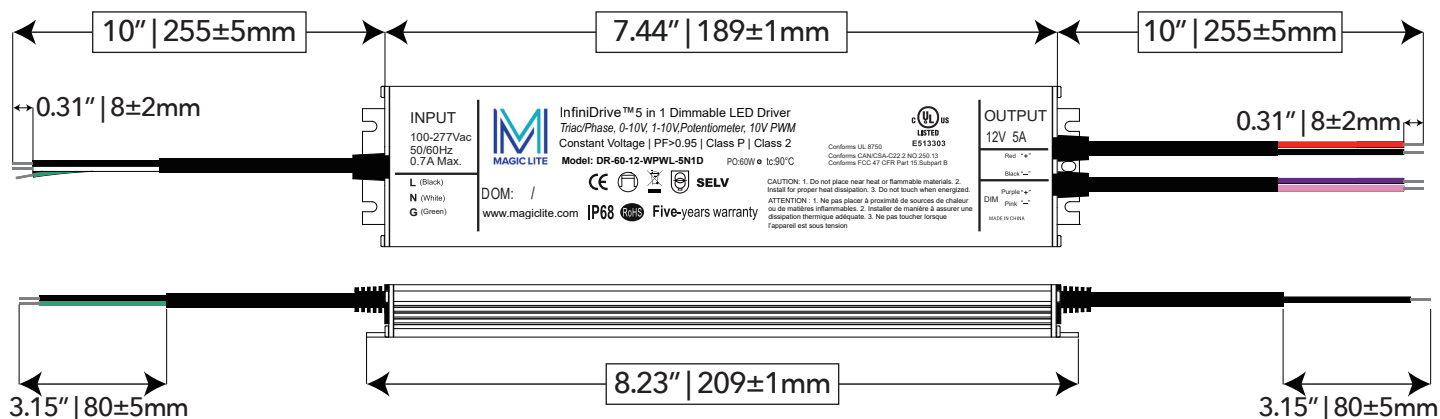

### FEATURES

- Meet U.S., Canada standard
- Universal input range: 100-277Vac
- Short circuit, over voltage and overload protection
- Applied to LED advertising signs, cabinet
- Suitable for dry, damp, wet locations
- UL/cUL, FCC, Class P & 5 years warranty

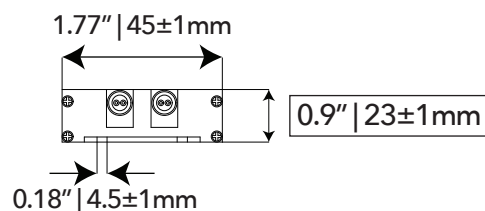

### SPECIFICATIONS

|                       |                                  |                 |                       |
|-----------------------|----------------------------------|-----------------|-----------------------|
| Output Voltage        | 12Vdc ±0.5Vdc                    | Storage Temp.   | -35°C to +85°C        |
| Output Current        | 5A Max                           | Humidity Range  | Working: up to 95% RH |
| Lifetime              | 50,000 hours @ Tc ≤ 80°C         | Power Factor    | ≥0.7                  |
| Input Voltage Range   | 100-277Vac                       | MTBF            | 200,000 hours (25°C)  |
| Approved Location     | For dry, damp, wet locations     | Output Power    | 60W Max               |
| Dimensions            | 8.23"×1.77"×0.9" (209×45×23 mm)  | Efficiency      | 85% (typ.)            |
| Dimming Compatibility | 5-in-1: MLV/TRIAC, 0-10V, PWM    | Weight          | 0.4 kg                |
| IP Rating             | IP68 (Do not submerge)           | Input Frequency | 50/60Hz               |
| Protection            | Short Circuit, Over Voltage/Load | Warranty        | 5 Years               |
| Certifications        | UL/cUL, FCC, Class P             | Working Temp.   | -30°C to +50°C        |

Ordering Code(s)

• DR-60-12-WPWL-5N1D

|         |  |         |  |
|---------|--|---------|--|
| Project |  | Type    |  |
| Date    |  | Contact |  |
| Notes   |  |         |  |