


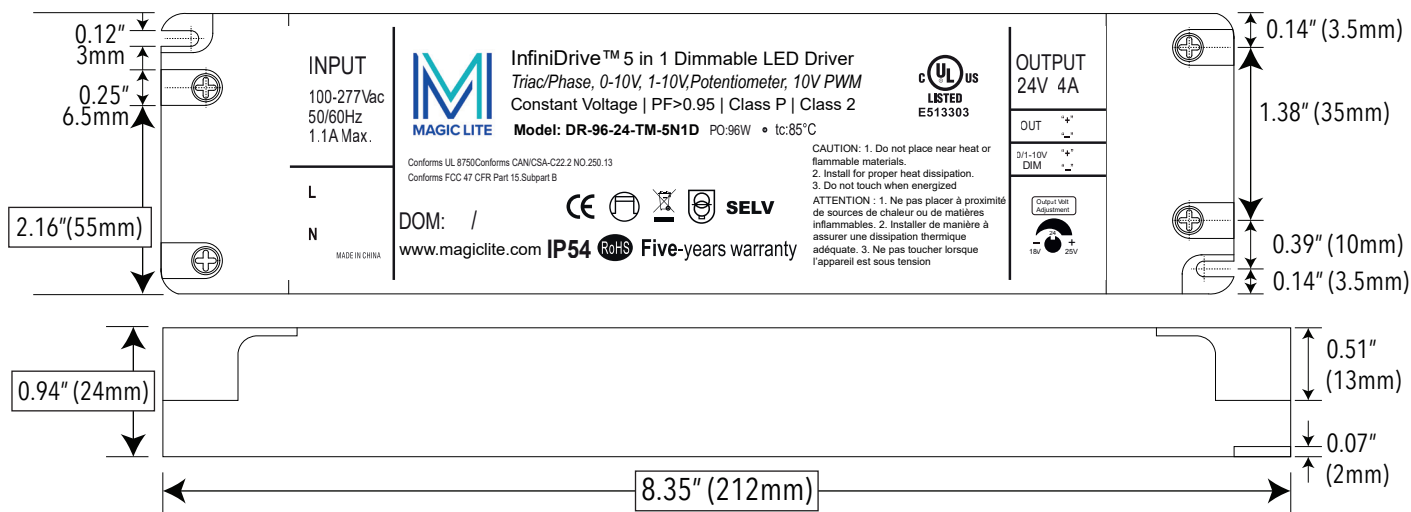


InfiniDrive™

DR-96-24-TM-5N1D

Class 2 Class P

FEATURES

- Premium 5-in-1 Dimming: Full 0-100% flicker-free performance.
- Universal Input: Flexible 100-277Vac for all projects.
- High Efficiency: Superior power factor of >0.95.
- Built-in Protections: Overload, short circuit, and over-voltage.
- Certified & Reliable: UL/cUL, FCC, Class 2, Class P, RoHS compliant.
- 5-Year Warranty: Comprehensive peace of mind.

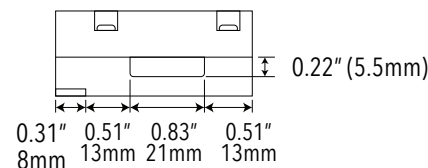

SPECIFICATIONS

Output Voltage	24Vdc	Storage Temp.	-35°C to +65°C
Output Current	4A Max	Humidity Range	Working: 10% to 95% RH
Lifetime	50,000 hours @ Tc ≤ 80°C	Power Factor	>0.95
Input Voltage Range	100-277Vac	MTBF	200,000 hours (at 25°C)
Approved Location	For dry locations (IP54)	Output Power	96W
Dimensions	8.35" x 2.17" x 0.94" (212 x 55 x 24 mm)	Efficiency	85% (typ.)
Dimming Compatibility	5-in-1: MLV/TRIAC, 0-10V, PWM	Weight	0.415 kg
IP Rating	IP54	Input Frequency	50/60Hz
Protection	Short Circuit, Over Voltage/Load	Warranty	5 Years
Certifications	UL/cUL, FCC, Class 2, Class P, RoHS	Working Temp.	-30°C to +50°C

Ordering Code(s)**• DR-96-24-TM-5N1D**

Project		Type	
Date		Contact	
Notes			