
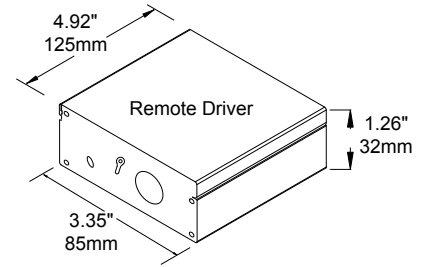


8", 25 watts High Power Thin-line LED Down Light. Designed for retrofit and new construction, damp location rated. Thin Line Downlights are a versatile and affordable choice for countless applications.

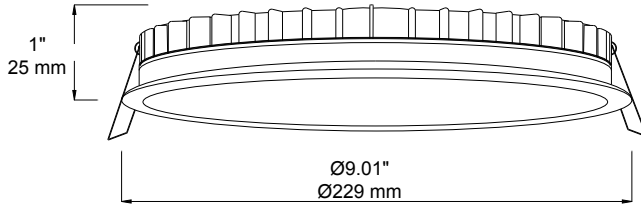

Features

- Energy Star rated - up to 80% energy savings
- Dimmable to 5% with most standard dimmers
- Available in standard power and high power versions
- 120° beam spread
- Warm White and Neutral White colour temperatures
- Two spring loaded clips to attach to any ceiling material
- Standard Power suitable for damp location
- No IC can required, for direct contact with insulation and combustible materials
- Connects directly to 120V power supply
- Optional 347V Step-Down Transformer
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus and Energy Star listed

Specifications

| | |
|--------------------------|--------------------------------------|
| LED Colour | White |
| CTT | WW (3000K) NW (4000K) |
| Input Voltage | 100 - 120V, 60Hz |
| Output Power(W) | 25 Watts |
| No. SMD2835 LEDs | 192 |
| Lumen (lm) | 2575(WW) 2973(NW) |
| CRI | >80 |
| Luminous Efficacy (lm/W) | 103lm/w (WW) 106lm/w (NW) |
| Approved Location | Damp |
| Dimmable | Yes |
| Life Span | > 50,000 hrs |
| Appearance Size | 9.01" W x 1" D (229mm W x 25mm D) |
| Installation Hole Size | 8.07" (205mm) |

Ordering Code:

LVLDL-HP-08 - - WH - R

WW (Warm White 3000K)
NW (Natural White 4000K)

| | | | |
|---------|--|---------|--|
| Project | | Type | |
| Date | | Contact | |
| Notes | | | |