


24V LED Globe Light is a Marquee Style decorative string light designed for the toughest of weather condition.

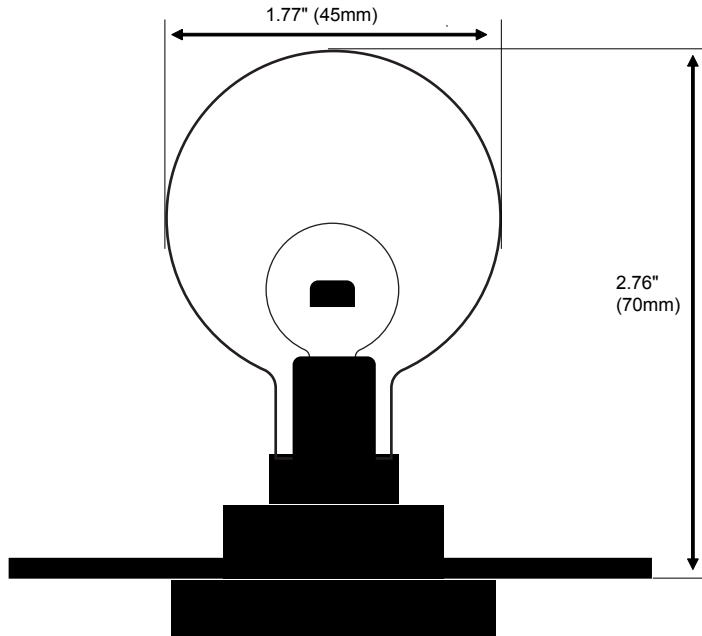

Shown Actual Size

Specifications

Electrical	24V DC, .5W
LED Life	50,000 hours
LED Colours	Cool White 6000K Warm White 2700k Red, Blue, Green, Amber <small>*Colours available upon request.</small>
Lumens	50 lumens
Efficacy	100lm/w
Cable	PVC Black SPT2 16AWG outdoor rated
Operating Temperature	-25°C to 65°C
Maximum length	150' (45.6M) Not to exceed 180 lamps
Wiring	Directly wired to class 2, 24V power supply

Power Supplies

Dimmable Indoor/Outdoor		Max # of Globes
MLDRE-40-24-DM	40 Watts	80
MLDRE-96-24-DM	96 Watts	180
Non Dimmable Indoor/Outdoor		
MLDR-120-24	120 Watts	180*
Non Dimmable Indoor		
MLDR-20-24-JB	20 Watts	36

*180 on a single tap or 200 on combined two secondary taps

Features

- Low power consumption
- Safe class 2, 24V power supply
- Field cuttable
- Multiple lamp spacing available
- Durable construction for indoor and outdoor use
- Available in Cool White and Warm White
- Optional Red, Blue, Green, & Amber are also available.

Applications

- Building outlines
- String across patios, walk ways, street, and public areas
- Under Soffit
- Bridges
- Architectural Features
- Coves
- Window decorations
- Deck and patios

Accessories

- MGEC**
End cap for wire (Bags of 10)
- MGNC**
Wood nail mounting clip
- MGWC**
Tie wrap for mounting to wire
- ST16W**
Outdoor rated cable for DIY mounting
- MGTP**
Double sided tape (bag of 50 pieces)

Ordering Code:

Spacing
12" Standard

MGST - 12 -

Colour

WW - Warm White
CW - Cool White
R - Red
BL - Blue
G - Green
AM - Amber

Globe Light spare lamp code:

Colour

MGST - - LAMP

WW - Warm White
CW - Cool White
R - Red
BL - Blue
G - Green
AM - Amber

Outdoor Rated Cable

ST16W
for attached GLOBE Light Lamp Assemblies

Project

Type

Date

Contact

Notes