

3-COLOUR TEMPERATURE LED Thin-Line Down Light

Designed for remodel and new construction, wet locations listed, Thin-Line Down Lights are a versatile and affordable choice for countless applications.



FEATURES

- Energy Star rated - up to 80% energy savings
- Dimmable to 5% with most ELV dimmers
- 120° beam spread
- Adjustable colour temperature 2700K/3000K/4000K
- Two spring loaded clips to attach to any ceiling material
- Wet locations listed
- Temperature rating: -20°C-45°C
- No IC can required, for direct contact with insulation and combustible materials
- The driver is wired for 120V input
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus and Energy Star listed
- White finish
- Interchangeable brushed nickel, black and bronze trim rings available (sold separately)

APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms & Bathrooms
- Lobbies & Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Restaurants
- Offices

SPECIFICATIONS

	3 inch	4 inch	6 inch
Power Consumption (W)	6W	9W	12W
Lumens			
2700K	360	686	935
3000K	390	728	975
4000K	420	749	978
Dimming	Yes		
Appearance Size D1 x D2 x H	3.15" x 3.74" x 0.5" (80mm x 95mm x 13mm)	4.17" x 4.73" x 0.5" (106mm x 120mm x 13mm)	6.14" x 6.85" x 0.5" (156mm x 174mm x 13mm)
Dimensions (J-Box) D1 x D2 x H	4.72" x 2.05" x 1.83" (120mm x 52.1mm x 46.5mm)	5.1" x 3.5" x 1.3" (129.6mm x 89mm x 33mm)	
Installation Hole Size	3.35" (85mm)	4.33" (110mm)	6.3" (160mm)
Colour Rendering Index	80+		
Input Voltage	120V		
Colour Temperature	2700K 3000K 4000K		
Approved Location	Wet		

NOTE: Each fixture ships with one constant current power supply.

PRODUCT CODES

LVLDL - YY - CCT - WH - R - L3

3 Colour
Temperature LED
Thin-Line Down
Lights

SIZE
03 - 3"
04 - 4"
06 - 6"

ROUND TRIM RINGS
(Sold Separately)

LVLDL - **03** - TR - **XX** - L3
LVLDL - **04** - TR - **XX** - L3
LVLDL - **06** - TR - **XX** - L3

TRIM RING FINISH

BK - Black
BZ - Bronze
BN - Brushed Nickel

BEAUTY RINGS
(Sold Separately)

LVLDL - BR - **3** - L3
LVLDL - BR - **4** - L3
LVLDL - BR - **6** - L3

† White finish only.

STEP-DOWN TRANSFORMERS

DLT-347




Step-down transformer 347/120V AC
25VA (non-dimmable)

DLT-60-347

Step-down transformer 347/120V AC
60VA (non-dimmable)

DLT-100-347




Step-down transformer 347/120V AC
100VA (non-dimmable)

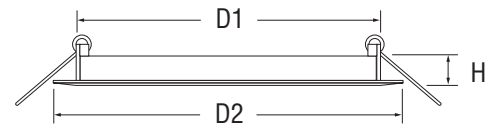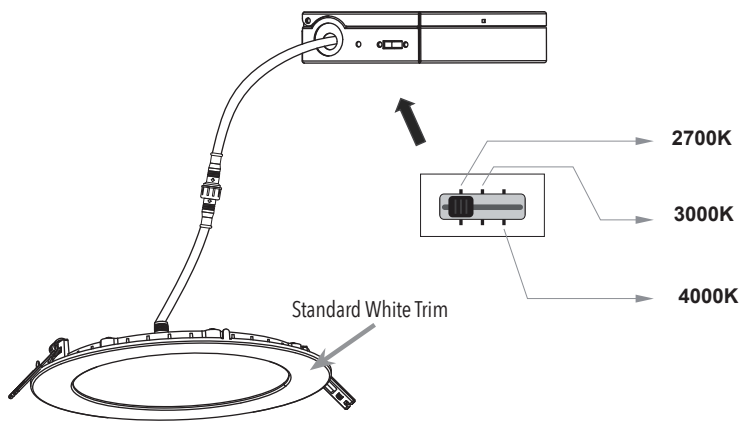

Interchangeable brushed nickel, black and bronze trim rings available (sold separately).

CONSTRUCTION PLATES

BEAUTY RINGS

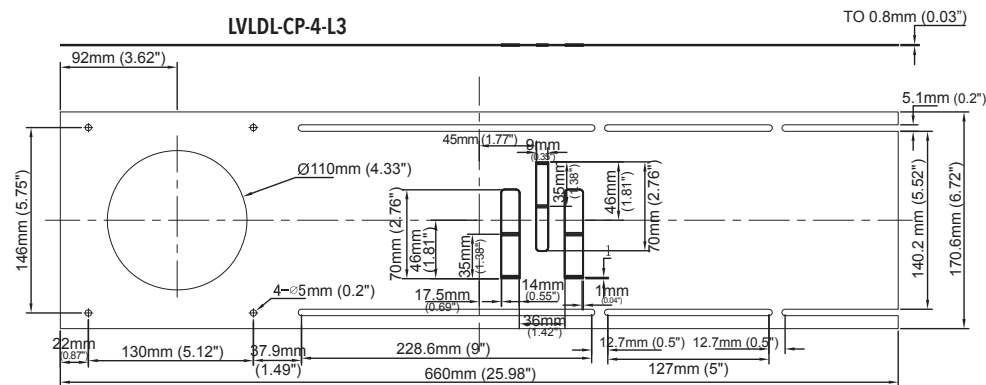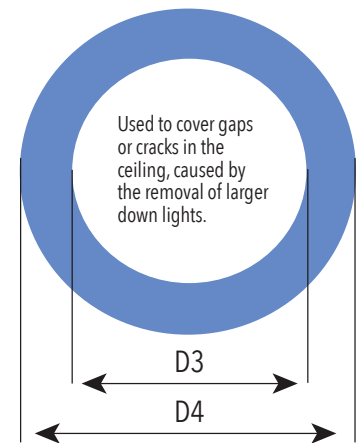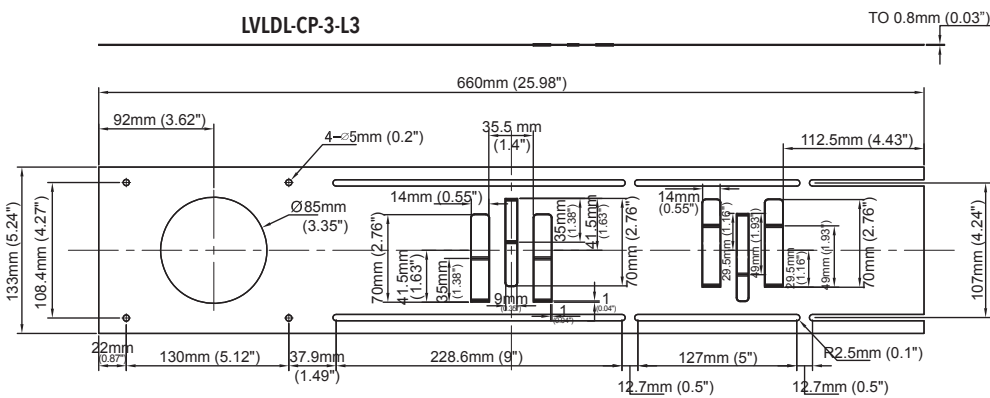

Size	D3	D4
3"	84mm (3.31")	114mm (4.49")
4"	109mm (4.29")	139mm (5.47")
6"	160mm (6.3")	194mm (7.64")
8"	210mm (8.27")	245mm (9.65")
10"	261mm (10.28")	293mm (11.54")

