


Wall Washer 4' Enclosed

This a type of lighting fixture designed to evenly distribute light over a wall or vertical surface. Enclosed within a 4-foot-long casing, this wall washer is designed for durability and protection against dust, moisture, and other environmental factors.

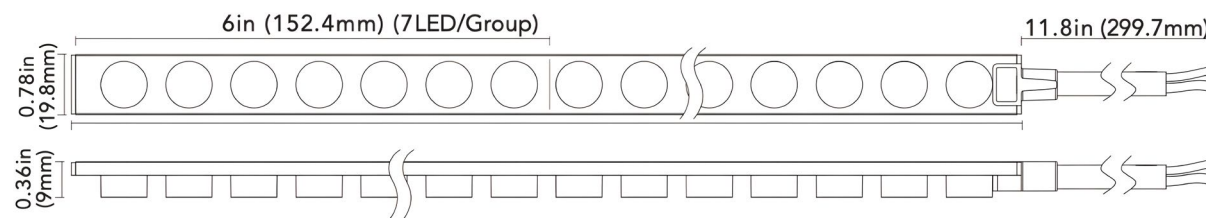


FEATURES

- Safe 24V DC operation (Requires our 24V driver)
- Low power consumption: 5.8W/FT
- Suitable for indoor and outdoor use
- Beam angle: 30°
- Available in 2700K, 3000K, 4000K color temperatures
- Long life 30, 000 hours
- Dimmable with dimmable drivers
- Field cuttable every 6" (Maximum run is 16ft.)
- Sold in 33 Rolls
- cULus certified for wet locations
- 3 years limited warranty

APPLICATIONS

- Architectural lighting
- Signage
- Landscape lighting
- Exterior/interior commercial

ACCESSORIES



ES-WB
Wall bracket set



ES-ADJ-BR
Adjustable bracket

SPECIFICATIONS		
Product Code	ES-LS2835-30-WH-24-4FT	
Electrical	Input Voltage	24V DC
	Power Consumption	5.8W/Ft
Specs	Colour Temperature	3000K
	CRI	90+
	Efficacy	105LM/W
	Luminous Flux	610LM/FT
	Dimmable	Yes
	Beam Angle	30°
LED	Type	SMD2835
	Life Span	30,000 Hours
	Spacing	N/A
	# per foot (304mm)	14
Design	Dimensions (Inches)	5/16" x 9/16"
	Dimensions (Millimeters)	8 x 15mm
	Max Single Run Length	N/A
	Custom Cuttable	N/A
	Approved Location	Indoor/Outdoor
	Mounting	Ceiling, floor
Warranty	6 years	
Approvals	cULus for wet locations	

INDOOR/OUTDOOR DIMMABLE DRIVERS

MLDRE-40-24-DM
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

MLDRE-96-24-DM
6.77" x 2.67" x 1.26" (171 x 68 x 32mm)

NON DIMMABLE DRIVERS

MLDR-120-24 (Indoor/Outdoor)
120W hardwire
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)